

N Male Right Angle to N Male Right Angle Cable Using RG8 Coax





PE3W11245

Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: RG8
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC (NC) Jacket

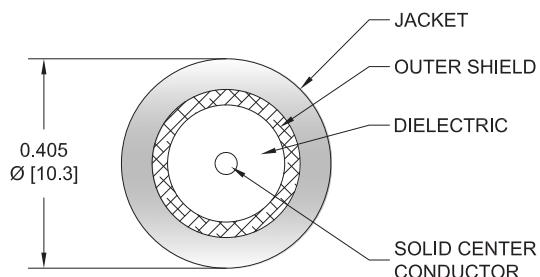

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W11245 type N male right angle to type N male right angle cable using RG8 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG8 coax. The PE3W11245 type N male to type N male cable assembly operates to 1 GHz. The right angle type N interfaces on the RG8 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1	GHz
VSWR			1.4:1	
Velocity of Propagation	66			%
Capacitance	30.8 [101.05]			pF/ft [pF/m]

Specifications by Frequency

N Male Right Angle to N Male Right Angle Cable Using RG8 Coax



PE3W11245

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	1000	MHz	
PE3W11245	Custom Lengths Available	Insertion Loss (Typ.)	0.013	0.017	0.029	0.049	0.08	dB/ft	
			0.05	0.06	0.1	0.17	0.27	dB/m	
PE3W11245-12	12 In	Insertion Loss (Typ.)	0.42	0.42	0.43	0.45	0.48	dB	0.46
PE3W11245-24	24 In	Insertion Loss (Typ.)	0.43	0.44	0.46	0.5	0.56	dB	0.561
PE3W11245-36	36 In	Insertion Loss (Typ.)	0.44	0.46	0.49	0.55	0.64	dB	0.661
PE3W11245-48	48 In	Insertion Loss (Typ.)	0.46	0.47	0.52	0.6	0.72	dB	0.761
PE3W11245-72	72 In	Insertion Loss (Typ.)	0.48	0.51	0.58	0.7	0.88	dB	0.961

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
Loss due to Connector 2: 0.2 dB
Base Weight: 0.46 pounds
Additional Weight per Inch: 0.00834 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.46 lbs [208.65 g]

Cable

Cable Type	RG8
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.405 in [10.29 mm]

N Male Right Angle to N Male Right Angle Cable Using RG8 Coax



PE3W11245

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum

Environmental Specifications

Operating Range Temperature

-40 to +80 deg C

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

N Male Right Angle to N Male Right Angle Cable Using RG8 Coax




PE3W11245

Typical Performance Data

How to Order

Part Number Configuration:

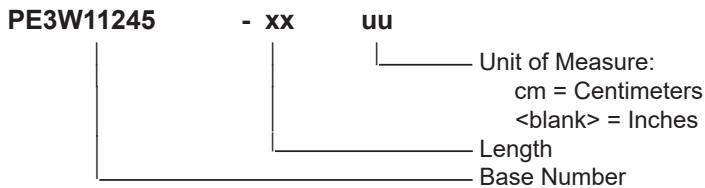

Example: PE3W11245-12 = 12 inches long cable
PE3W11245-100cm = 100 cm long cable

N Male Right Angle to N Male Right Angle Cable Using RG8 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable Using RG8 Coax PE3W11245](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-n-male-cable-using-rg8-pe3w11245-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W11245 CAD Drawing

N Male Right Angle to N Male Right Angle Cable Using RG8 Coax

