

10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax



RF Cable Assemblies Technical Data Sheet


PE3W11733

Configuration

- Connector 1: 10-32 Male Right Angle
- Connector 2: BNC Female Bulkhead
- Cable Type: RG188-DS

Features

- Double Shielded
- PTFE Jacket

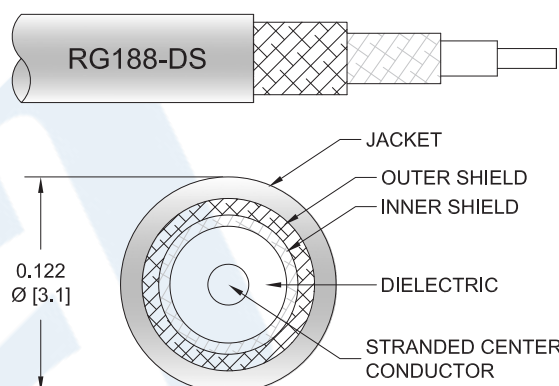

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W11733 10-32 male right angle to BNC female bulkhead cable using RG188-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 10-32 to BNC cable assembly has a male to female gender configuration with 50 ohm flexible RG188-DS coax. The right angle 10-32 interface on the RG188-DS cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Capacitance		32 [104.99]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Weight 0.059 lbs [26.76 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax PE3W11733](#)



10-32 Male Right Angle to BNC Female
Bulkhead Cable Using RG188-DS Coax

RF Cable Assemblies Technical Data Sheet

PE3W11733

Cable

Cable Type	RG188-DS
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.118 in [3 mm]

Connectors

Description	Connector 1	Connector 2
Type	10-32 Male Right Angle	BNC Female Bulkhead
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax PE3W11733](#)



10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax

RF Cable Assemblies Technical Data Sheet

PE3W11733

How to Order

Part Number Configuration:

PE3W11733

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W11733-12 = 12 inches long cable
PE3W11733-100cm = 100 cm long cable

10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax PE3W11733](https://www.pasternack.com/10-32-male-right-angle-to-bnc-female-bulkhead-cable-using-rg188-ds-pe3w11733-p.aspx)

URL: <https://www.pasternack.com/10-32-male-right-angle-to-bnc-female-bulkhead-cable-using-rg188-ds-pe3w11733-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W11733 CAD Drawing

10-32 Male Right Angle to BNC Female Bulkhead Cable Using RG188-DS Coax

