

Mini SMP Female Right Angle to SMA Male Cable 12 Inch Length Using PE-SR405FLJ Coax

PE3W12289-12




Configuration

- Connector 1: Mini SMP Female Right Angle
- Connector 2: SMA Male
- Cable Type: PE-SR405FLJ
- Coax Flex Type: Formable

Features

- Max Frequency 20 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

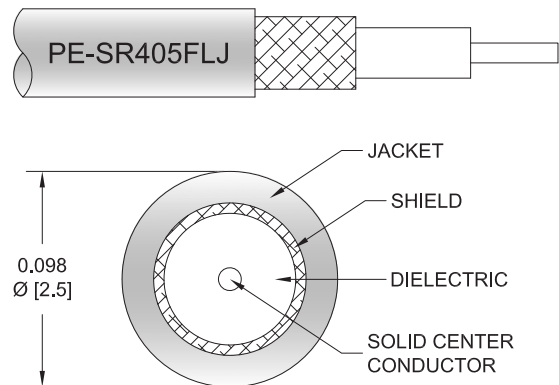

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W12289-12 Mini SMP female right angle to SMA male 12 inch cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack Mini SMP to SMA cable assembly has a female to male gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3W12289-12 Mini SMP female to SMA male cable assembly operates to 20 GHz. The right angle Mini SMP interface on the PE-SR405FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		20	GHz
VSWR			1.37:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/Km]

Mini SMP Female Right Angle to SMA Male Cable 12 Inch Length Using PE-SR405FLJ Coax

PE3W12289-12



Electrical Specifications

Description	Minimum	Typical	Maximum	Units
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	20	GHz
Insertion Loss (Typ.)	0.31	0.43	0.7	1.02	1.61	dB

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.04XSQRT(FGHz) dB for the male connector and 0.05XSQRT(FGHz) dB for the female connector.

Mechanical Specifications

Cable Assembly

Length	12 in [304.8 mm]
Width/Diameter	0.5 in [12.7 mm]
Weight	0.028 lbs [12.7 g]

Cable

Cable Type	PE-SR405FLJ
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Tinned Copper Composite Braid
Jacket Material	FEP, Black
Jacket Diameter	0.105 in [2.67 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	0.787 in [19.99 mm]

Mini SMP Female Right Angle to SMA Male Cable
12 Inch Length Using PE-SR405FLJ Coax

PE3W12289-12



Connectors

Description	Connector 1	Connector 2
Type	Mini SMP Female Right Angle	SMA Male
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Mating Cycles		500
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification		ASTM-B488
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Beryllium Copper, Gold	
Body Material and Plating	Brass, Gold	Beryllium Copper, Gold
Body Plating Specification		ASTM-B488
Coupling Nut Material and Plating		Steel
Torque		7 in-lbs 0.79 Nm

Environmental Specifications

Operating Range Temperature -55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Mini SMP Female Right Angle to SMA Male Cable 12 Inch Length Using PE-SR405FLJ Coax



PE3W12289-12

Typical Performance Data

How to Order

Part Number Configuration: **PE3W12289** **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length
Base Number

Example: PE3W12289-12 = 12 inches long cable
PE3W12289-100cm = 100 cm long cable

Mini SMP Female Right Angle to SMA Male Cable 12 Inch Length Using PE-SR405FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP Female Right Angle to SMA Male Cable 12 Inch Length Using PE-SR405FLJ Coax PE3W12289-12](#)

URL: <https://www.pasternack.com/mini-smp-female-right-angle-to-sma-male-cable-12-inch-length-using-pe-sr405flj-pe3w12289-12-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W12289-12 CAD Drawing
Mini SMP Female Right Angle to SMA Male Cable 12 Inch Length Using PE-SR405FLJ Coax

