

2.92mm Male to N Male Cable Using RG402 Coax, LF Solder




PE3W12651LF

Configuration

- Connector 1: 2.92mm Male
- Connector 2: N Male
- Cable Type: RG402
- Coax Flex Type: Semi-Rigid

Features

- 69.5% Phase Velocity

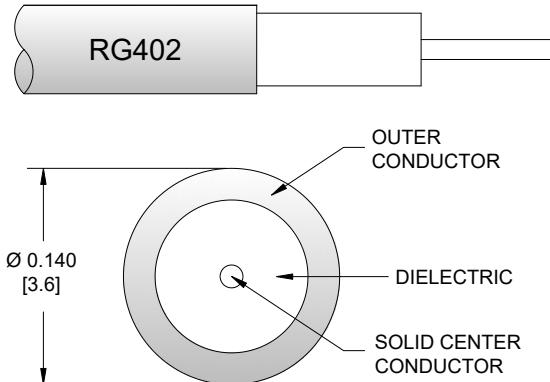

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W12651LF 2.92mm male to type N male cable using RG402 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack 2.92mm to type N cable assembly has a male to male gender configuration with 50 ohm semi-rigid RG402 coax.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69.5		%

Mechanical Specifications

Cable Assembly

Length	0 in [0 mm]
Width/Diameter	0.5 in [12.7 mm]
Weight	0.12 lbs [54.43 g]

Cable

Cable Type	RG402
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE

2.92mm Male to N Male Cable Using RG402 Coax, LF Solder



PE3W12651LF

Number of Shields	1
Outer Conductor 1 Material and Plating	Copper
Jacket Material	Tan
Repeated Minimum Bend Radius	0.25 in [6.35 mm]

Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Brass, Gold
Contact Plating Specification	50 μ in minimum	30 μ in. minimum
Dielectric Type	PCTFE	Teflon
Body Material and Plating	Stainless Steel, Gold over Nickel	Brass, Nickel
Body Plating Specification	50 μ in minimum	100 μ in. minimum
Coupling Nut Material and Plating	Stainless Steel, Gold over Nickel	Brass, Nickel
Coupling Nut Plating Specification	50 μ in minimum	100 μ in. minimum
Hex Size	5/16 inch	
Torque	8 in-lbs 0.9 Nm	

Environmental Specifications

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

2.92mm Male to N Male Cable Using RG402 Coax, LF Solder

**PE3W12651LF****Typical Performance Data****How to Order**

Part Number Configuration:

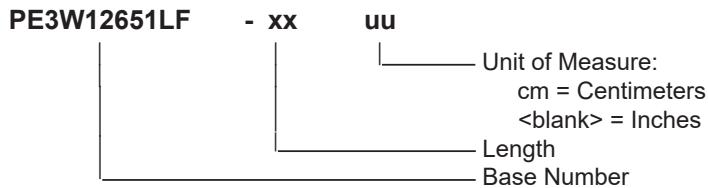

Example: PE3W12651LF-12 = 12 inches long cable
PE3W12651LF-100cm = 100 cm long cable

2.92mm Male to N Male Cable Using RG402 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to N Male Cable Using RG402 Coax, LF Solder PE3W12651LF](#)

URL: <https://www.pasternack.com/2.92mm-male-to-n-male-cable-using-rg402-lf-solder-pe3w12651lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W12651LF CAD Drawing

2.92mm Male to N Male Cable Using RG402 Coax, LF Solder

