

BNC Male to SMA Male Low Loss Cable Using LMR-195-UF Coax



PE3W13347

Configuration

- Connector 1: BNC Male
- Connector 2: SMA Male
- Cable Type: LMR-195-UF
- Coax Cable Group: 3
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 74% Phase Velocity
- Double Shielded
- TPE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W13347 BNC male to SMA male cable using LMR-195-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-195-UF coax. The PE3W13347 BNC male to SMA male cable assembly operates to 4 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		74		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		9.5 [31.17]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ohms/1000ft [Ohms/Km]

BNC Male to SMA Male Low Loss Cable Using LMR-195-UF Coax



PE3W13347

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			3,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency					MHz	
PE3W13347	Custom Lengths Available	Insertion Loss (Typ.)	0.041	0.067	0.097	0.138	0.281	dB/ft	
			0.14	0.22	0.32	0.46	0.93	dB/m	
PE3W13347-12	12 In	Insertion Loss (Typ.)	0.25	0.27	0.3	0.34	0.49	dB	0.064
PE3W13347-24	24 In	Insertion Loss (Typ.)	0.29	0.34	0.4	0.48	0.77	dB	0.085
PE3W13347-36	36 In	Insertion Loss (Typ.)	0.33	0.41	0.5	0.62	1.05	dB	0.106
PE3W13347-48	48 In	Insertion Loss (Typ.)	0.37	0.47	0.59	0.76	1.33	dB	0.127
PE3W13347-60	60 In	Insertion Loss (Typ.)	0.41	0.54	0.69	0.89	1.61	dB	0.148

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.064 pounds
Additional Weight per Inch:	0.00175 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.064 lbs [29.03 g]

Cable

Cable Type	LMR-195-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	Foam PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper
Jacket Material	TPE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

BNC Male to SMA Male Low Loss Cable
Using LMR-195-UF Coax



PE3W13347

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	SMA Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	90 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque		3 in-lbs 0.34 Nm

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


BNC Male to SMA Male Low Loss Cable
Using LMR-195-UF Coax



PE3W13347

Typical Performance Data

How to Order

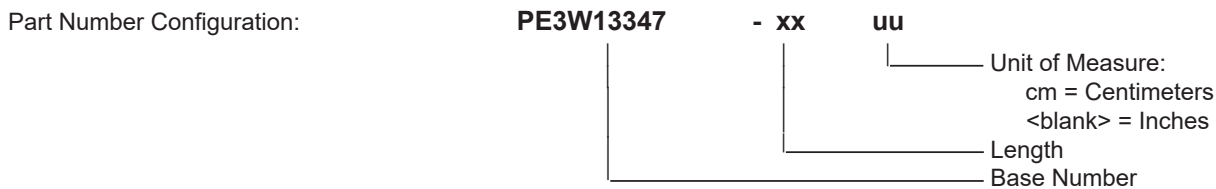

Example: PE3W13347-12 = 12 inches long cable
PE3W13347-100cm = 100 cm long cable

BNC Male to SMA Male Low Loss Cable Using LMR-195-UF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Low Loss Cable Using LMR-195-UF Coax PE3W13347](#)

URL: <https://www.pasternack.com/bnc-male-to-sma-male-low-loss-cable-using-lmr-195-uf-pe3w13347-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W13347 CAD Drawing

BNC Male to SMA Male Low Loss Cable Using LMR-195-UF Coax

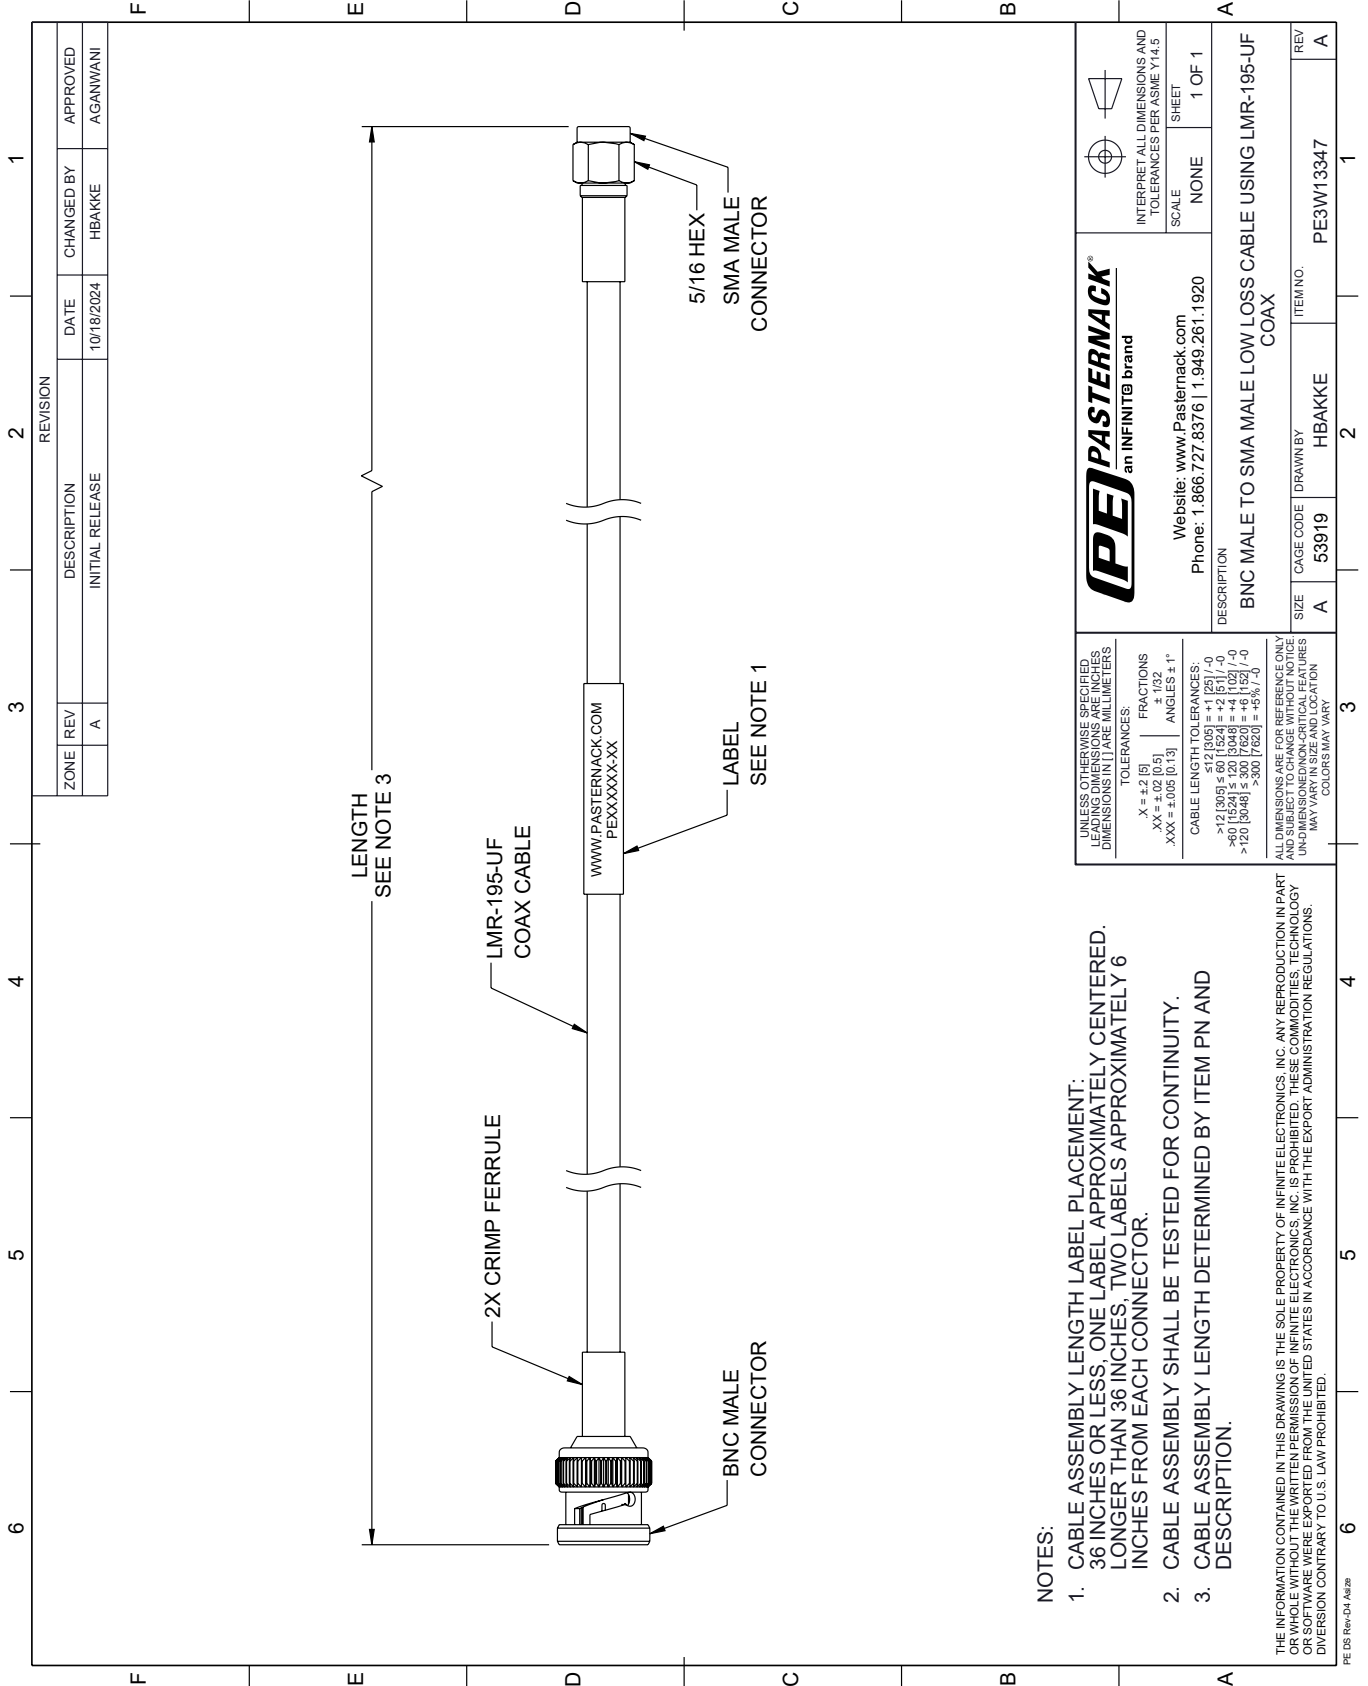

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV			
	A	10/18/2024	HBAKKE	AGANWANI
DESCRIPTION				
INITIAL RELEASE				

- NOTES:
1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		PE PASTERNAK an INFINITE brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		Website: www.Pasternack.com		SCALE: NONE	
.X = ±.2 [5]		Phone: 1.866.727.8376 1.949.261.1920		SHEET: 1 OF 1	
.XX = ±.02 [0.5]					
.XXX = ±.005 [0.13]					
FRACTIONS ± 1/32					
ANGLES ± 1°					
CABLE LENGTH TOLERANCES:		DESCRIPTION		REV	
>12 [305] ≤ 60 [1524] = ±.1 [2.5] / -0		BNC MALE TO SMA MALE LOW LOSS CABLE USING LMR-195-UF COAX		A	
>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0		SIZE		REV	
>120 [3048] ≤ 300 [7620] = ±.6 [15.2] / -0		A		A	
>300 [7620] = ±.8 [20.3] / -0		CAGE CODE		ITEM NO.	
ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE NON-CRITICAL FEATURES. DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.		53919		PE3W13347	
		DRAWN BY		1	
		HBAKKE		2	
				3	
				4	
				5	
				6	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE BEING EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.