

2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax





PE3W13510

Configuration

- Connector 1: 2.92mm Male
- Connector 2: SMA Male Right Angle
- Cable Type: PE-SR405FL
- Coax Flex Type: Formable

Features

- Max Frequency 10 GHz
- 69.5% Phase Velocity

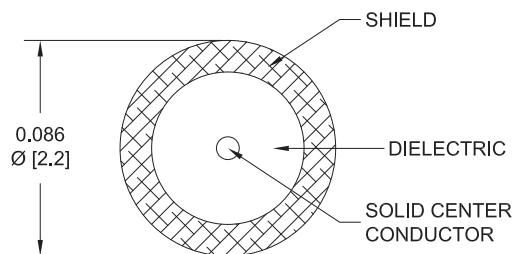

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W13510 2.92mm male to SMA male right angle cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 2.92mm to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FL coax. The PE3W13510 2.92mm male to SMA male cable assembly operates to 10 GHz. The right angle SMA interface on the PE-SR405FL cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax



PE3W13510

Part Number	Length	Description	F1	F2	F3	F4	F5	Units MHz	Weight (lbs)
		Frequency	500	1000	2500	5000	10000		
PE3W13510	Custom Lengths Available	Insertion Loss (Typ.)	0.15	0.23	0.345	0.549	0.812	dB/ft	
			0.5	0.74	1.14	1.81	2.67	dB/m	
PE3W13510-6	6 inch	Insertion Loss (Typ.)	0.38	0.42	0.48	0.58	0.71	dB	0.034
PE3W13510-9	9 inch	Insertion Loss (Typ.)	0.42	0.47	0.56	0.72	0.91	dB	0.037
PE3W13510-12	12 inch	Insertion Loss (Typ.)	0.45	0.53	0.65	0.85	1.12	dB	0.039
PE3W13510-24	24 inch	Insertion Loss (Typ.)	0.6	0.75	0.99	1.4	1.93	dB	0.051
PE3W13510-36	36 inch	Insertion Loss (Typ.)	0.75	0.98	1.34	1.95	2.74	dB	0.062

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.2 dB

Base Weight: 0.039 pounds

Additional Weight per Inch: 0.00092 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.039 lbs [17.69 g]

Cable

Cable Type	PE-SR405FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper, Tin
Repeated Minimum Bend Radius	0.78 in [19.81 mm]

2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax



PE3W13510

Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	SMA Male Right Angle
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Brass, Gold
Contact Plating Specification	50 μ in minimum	50 μ in minimum
Dielectric Type	PCTFE	PTFE
Body Material and Plating	Passivated Stainless Steel	Stainless Steel, Gold
Body Plating Specification	SAE-AMS-2700	30 μ in minimum
Coupling Nut Material and Plating	Passivated Stainless Steel	Brass, Nickel
Coupling Nut Plating Specification	SAE-AMS-2700	100 μ in minimum
Hex Size	5/16 inch	5/16 inch
Torque	10 in-lbs 1.13 Nm	5 in-lbs 0.57 Nm

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax



PE3W13510

Typical Performance Data

How to Order

Part Number Configuration:

PE3W13510 - xx uu

Legend:

- Unit of Measure:
cm = Centimeters
<blank> = Inches
- Length
- Base Number

Example: PE3W13510-12 = 12 inches long cable
PE3W13510-100cm = 100 cm long cable

2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax PE3W13510](#)

URL: <https://www.pasternack.com/2.92mm-male-to-sma-male-cable-using-pe-sr405fl-pe3w13510-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W13510 CAD Drawing

2.92mm Male to SMA Male Right Angle Cable Using PE-SR405FL Coax

