



QMA Male to SMA Male Cable Using RG141 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W14325LF

Configuration

- Connector 1: QMA Male
- Connector 2: SMA Male
- Cable Type: RG141

Features

- Max Frequency 6 GHz
- 70% Phase Velocity
- PTFE (FG) Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W14325LF QMA male to SMA male cable using RG141 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack QMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG141 coax. The PE3W14325LF QMA male to SMA male cable assembly operates to 6 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male to SMA Male Cable Using RG141 Coax , LF Solder PE3W14325LF](#)



QMA Male to SMA Male Cable Using RG141 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W14325LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			1,000	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Typ.)	0.054	0.079	0.13	0.21	0.41	dB/ft
	0.18	0.26	0.43	0.69	1.35	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.064 lbs [29.03 g]

Cable

Cable Type RG141
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper
 Jacket Material PTFE (FG), Beige
 Jacket Diameter 0.19 in [4.83 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male to SMA Male Cable Using RG141 Coax , LF Solder PE3W14325LF](#)



QMA Male to SMA Male Cable Using RG141 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W14325LF

Connectors

Description	Connector 1	Connector 2
Type	QMA Male	SMA Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		50 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Phosphor Bronze, Tri-Metal	
Body Material and Plating	Brass, Tri-Metal	Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male to SMA Male Cable Using RG141 Coax , LF Solder PE3W14325LF](#)



QMA Male to SMA Male Cable Using RG141 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W14325LF

How to Order

Part Number Configuration:

PE3W14325LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W14325LF-12 = 12 inches long cable
PE3W14325LF-100cm = 100 cm long cable


QMA Male to SMA Male Cable Using RG141 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male to SMA Male Cable Using RG141 Coax , LF Solder PE3W14325LF](https://www.pasternack.com/qma-male-to-sma-male-cable-using-rg141-lf-solder-pe3w14325lf-p.aspx)

URL: <https://www.pasternack.com/qma-male-to-sma-male-cable-using-rg141-lf-solder-pe3w14325lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W14325LF CAD Drawing
QMA Male to SMA Male Cable Using RG141 Coax , LF Solder

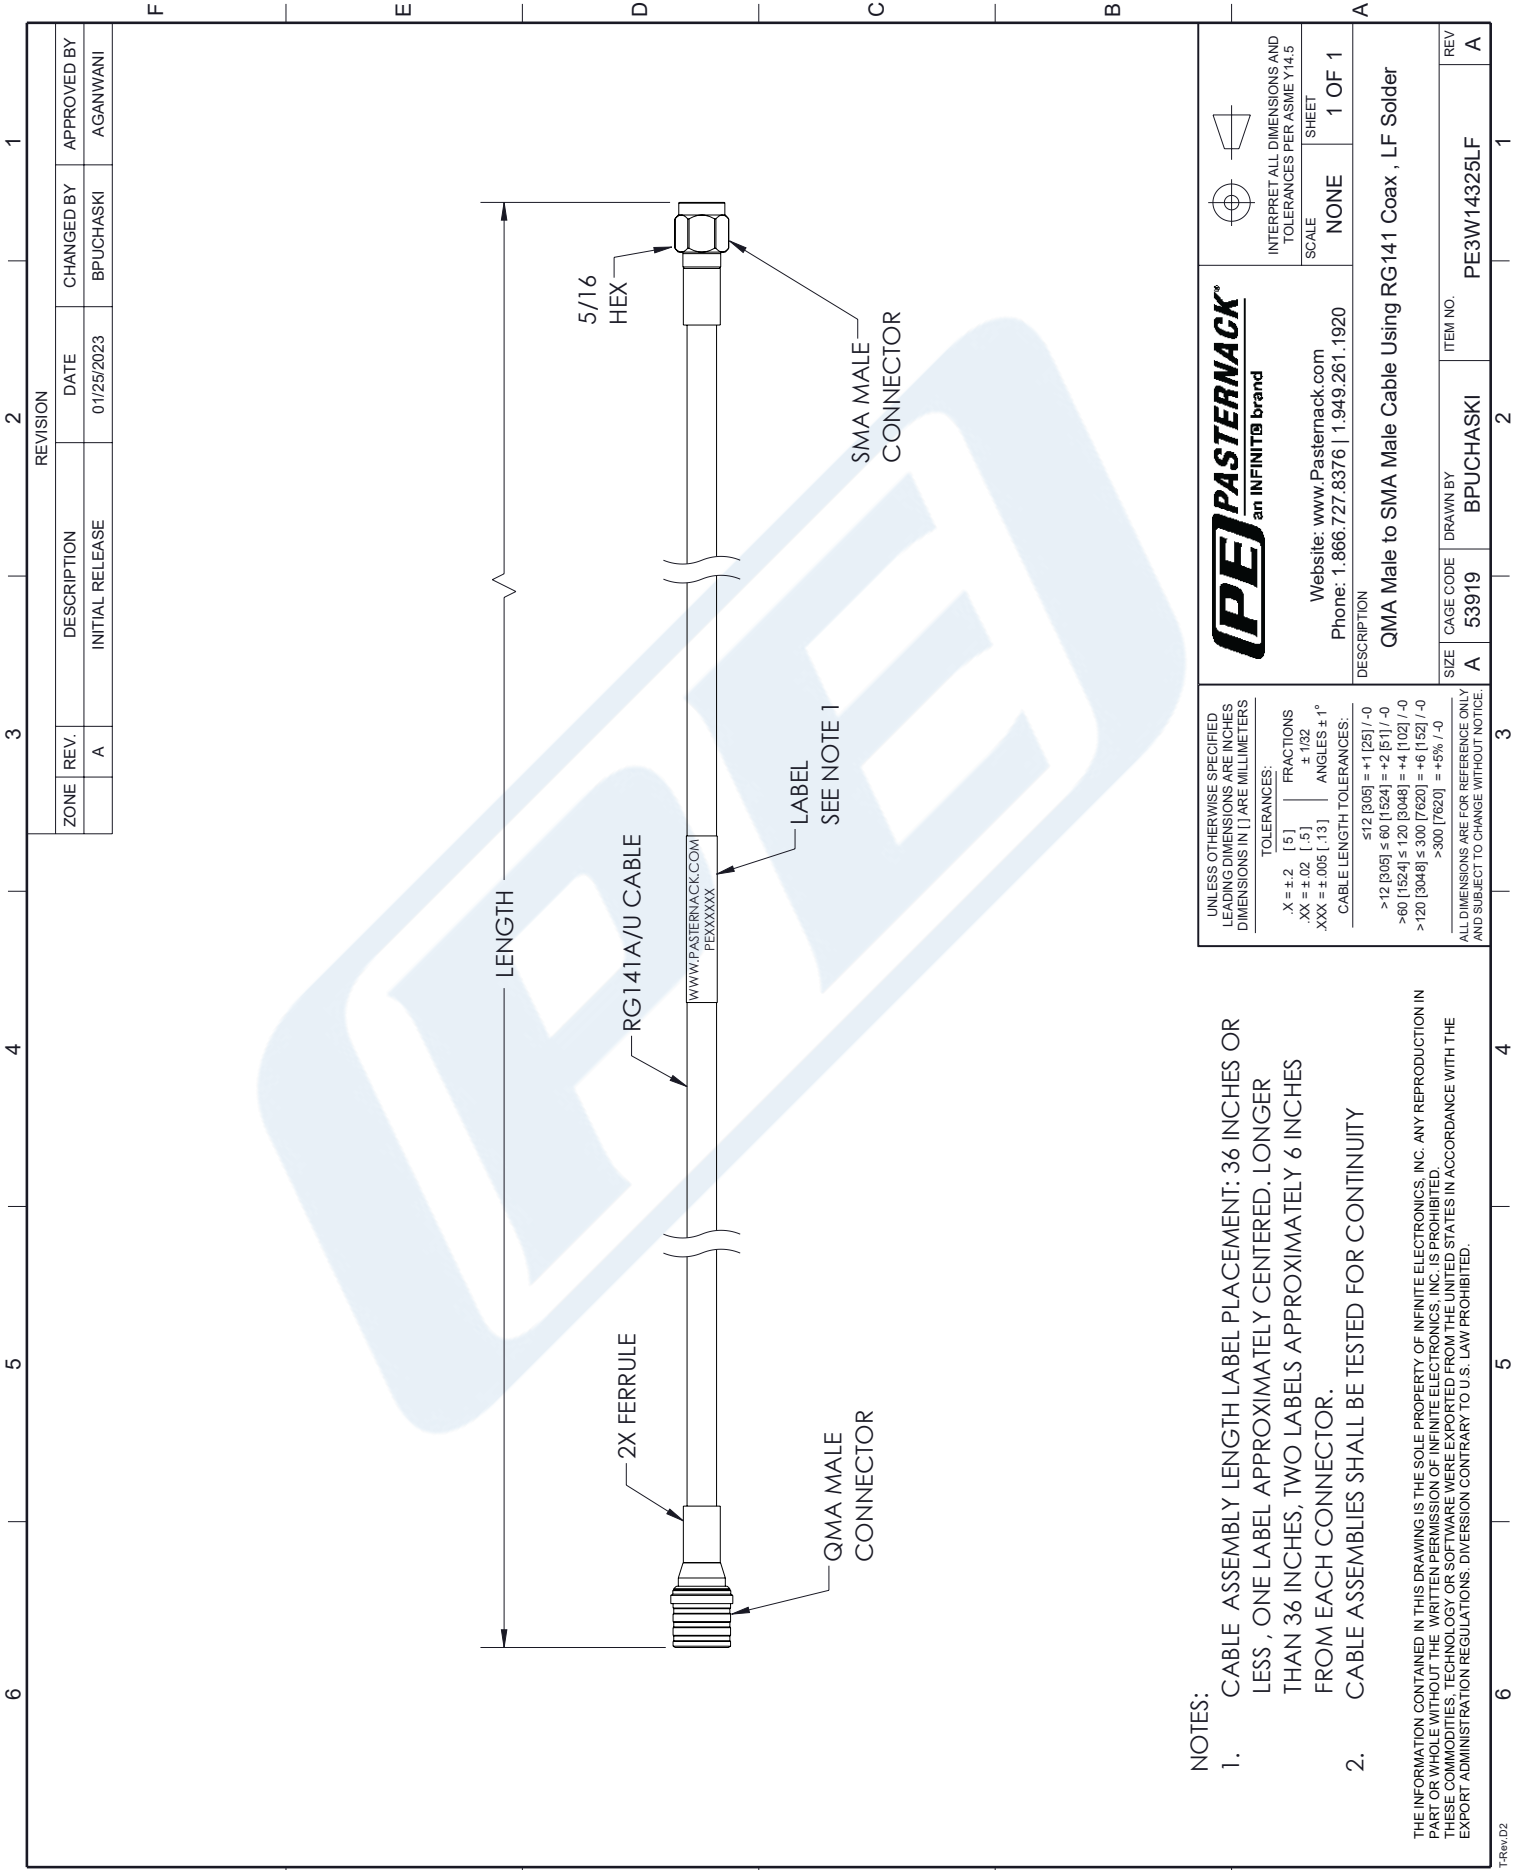

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
 2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X = ±.2 [.5]	FRACTIONS ± 1/32
.XX = ±.02 [.5]	ANGLES ± 1°
XXX = ±.005 [.13]	
CABLE LENGTH TOLERANCES:	
≤12 [305]	±.1 [25] / -0
>12 [305] ≤ 60 [1524]	±.2 [51] / -0
>60 [1524] ≤ 120 [3048]	±.4 [102] / -0
>120 [3048] ≤ 300 [7620]	±.6 [152] / -0
>300 [7620]	±.5% / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	

PE PASTERNAK an INFINITE brand	
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920	
DESCRIPTION QMA Male to SMA Male Cable Using RG141 Coax , LF Solder	
SIZE	SCALE
A	NONE
CAGE CODE	SHEET
53919	1 OF 1
DRAWN BY	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
BPUCHASKI	
ITEM NO.	
PE3W14325LF	
REV	
A	