



NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF

RF Connectors Technical Data Sheet

Times Microwave Systems Connector Specification

Configuration

- NEX10 Male Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: TFT-402, TFT-402-LF
- Low PIM Design

Features

- Max. Operating Frequency 6 GHz
- Good VSWR of 1.3:1
- PIM levels lower than -160 dBc
- Silver Plated Brass Contact
- 100 µin contact plating

Applications

- General Purpose Test
- Wireless Communications
- Custom Cable Assemblies
- Low PIM Applications
- Distributed Antenna Systems (DAS)

Description

Pasternack's TC-402-NX10M-LP NEX10 male connector with solder/solder attachment for TFT-402 and TFT-402-LF is part of our full line of RF components available for same-day shipping. Our NEX10 male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1. The NEX10 male connector also has low passive intermodulation of -160 dBc.

Our NEX10 male connector TC-402-NX10M-LP datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.3:1	
Insertion Loss			0.24	dB
Passive Intermodulation			-160	dBc
Operating Voltage (DC)			750	Vdc
Insulation Resistance	5,000			MOhms

Electrical Specification Notes:
Insertion Loss is $0.1 * \text{sqrt}(F \text{GHz})$

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF TC-402-NX10M-LP](#)



NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF

RF Connectors Technical Data Sheet


TIMES MICROWAVE SYSTEMS
An Amphenol Company

TC-402-NX10M-LP

Mechanical Specifications

Size	
Length	0.866 in [22 mm]
Width/Dia.	0.472 in [11.99 mm]
Mating Cycles	100 Cycles
Mating Torque	9 in-lbs [1.02 Nm]
Cable Retention Force	56 lbs [25.4 kg]

Material Specifications

Description	Material	Plating
Contact	Brass	Silver 100 μ in
Insulation	PTFE	
Body	Brass	Silver 100 μ in
Coupling Nut	Brass	Tri-Metal 100 μ in
Gasket	Silicone Rubber	

Environmental Specifications

Temperature

Operating Range	-40 to +125 deg C
Shock	MIL-STD 202G, Meth. 213, Cond. I
Vibration	MIL-STD 202G, Meth. 204, Cond. B
Thermal Shock	MIL-STD 202G, Meth. 107, Cond. B

Environmental Specification Notes:
Climatic Class: IEC 60068 55/155/56

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF TC-402-NX10M-LP](#)



NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF

RF Connectors Technical Data Sheet







TC-402-NX10M-LP

NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [NEX10 Male Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF TC-402-NX10M-LP](https://www.pasternack.com/nex10-male-tft-402-connector-tc-402-nx10m-lp-p.aspx)

URL: <https://www.pasternack.com/nex10-male-tft-402-connector-tc-402-nx10m-lp-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

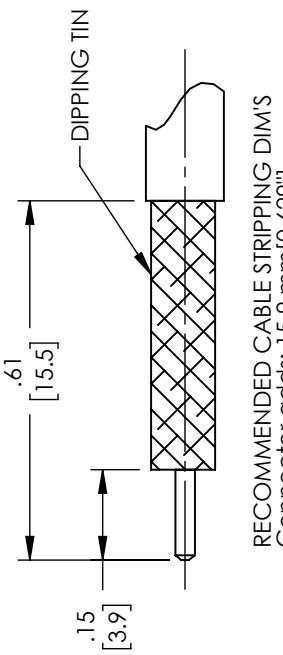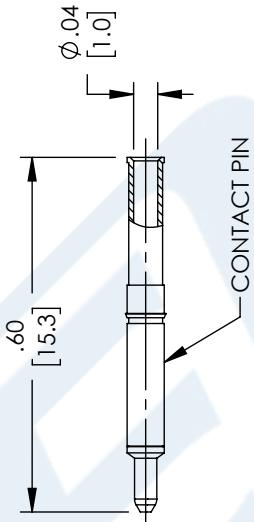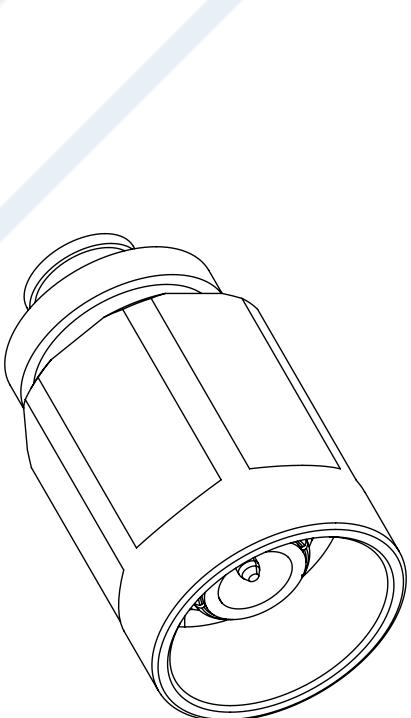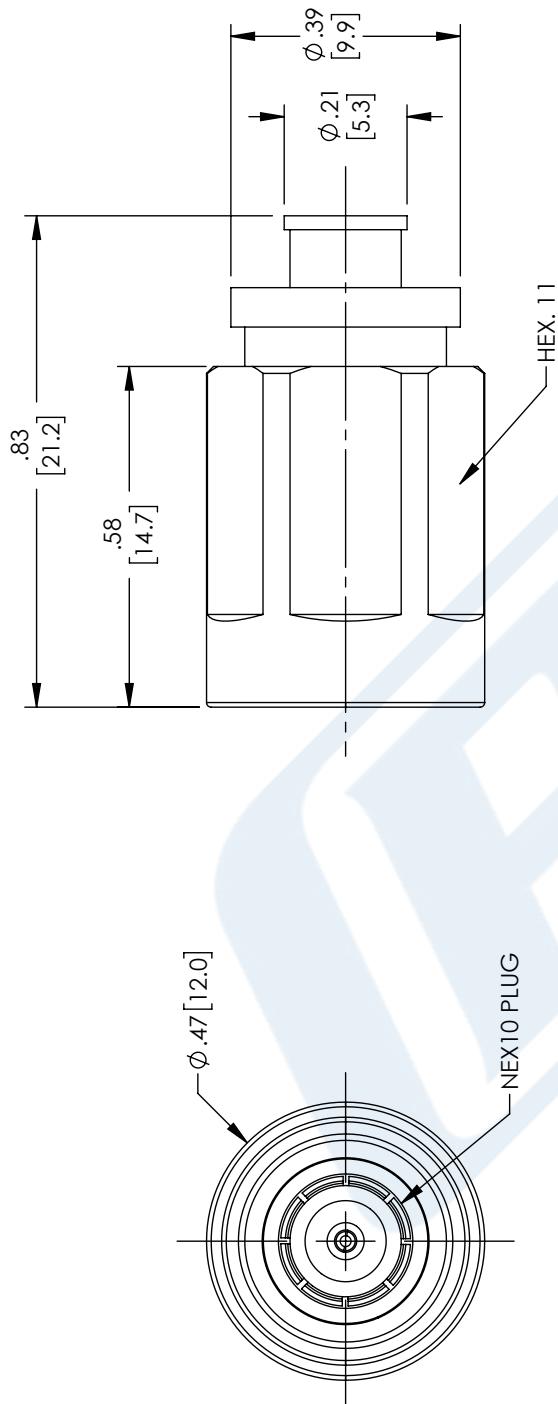

RECOMMENDED CABLE STRIPPING DIM'S
Connector adds: 15.9 mm[0.629"]

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

 PASTERACK an INFINITE brand		THIRD-ANGLE PROJECTION	
			<small>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERACK CORPORATION ALL RIGHTS RESERVED</small>
<small>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</small>		<small>TOLERANCES: X = $\pm .2$ [5.08] FRACTIONS: XX = $\pm .02$ [5.1] $\pm 1/32$ XXX = $\pm .005$ [13] ANGLES $\pm 1^\circ$ CABLE LENGTH (L) TOLERANCES: L ± 12 [305] = $+1[28]/-0$ 12 [305] < L ≤ 60 [1524] = $+2[51]/-0$ 60 [1524] < L ≤ 120 [3048] = $+4[102]/-0$ 120 [3048] < L ≤ 300 [7620] = $+6[152]/-0$ 300 [7620] < L = $+58L/-0$</small>	
<small>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</small>		<small>ITEM NO. TC-402-NX10M-LP</small>	
<small>SIZE CAGE CODE DRAWN BY A 53919 DMAY</small>		<small>SCALE 3:1 REV A</small>	



QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF

RF Connectors Technical Data Sheet


TIMES MICROWAVE SYSTEMS
An Amphenol Company

TC-402-QM-RA-LP

Times Microwave Systems Connector Specification

Configuration

- QMA Male Connector
- 50 Ohms
- Right Angle Body Geometry
- Connector Interface Types: TFT-402, TFT-402-LF
- Low PIM Design

Features

- Max. Operating Frequency 3 GHz
- Excellent VSWR of 1.2:1
- PIM levels lower than -150 dBc
- Silver Plated Beryllium Copper Contact
- 200 µin contact plating

Applications

- General Purpose Test
- Wireless Communications
- Custom Cable Assemblies
- Low PIM Applications
- Distributed Antenna Systems (DAS)

Description

Pasternack's TC-402-QM-RA-LP QMA male right angle connector with solder/solder attachment for TFT-402 and TFT-402-LF is part of our full line of RF components available for same-day shipping. Our QMA male connector operates up to a maximum frequency of 3 GHz and offers excellent VSWR of 1.2:1. The QMA male connector also has low passive intermodulation of -150 dBc. Its right angle body geometry allows for easier connections in tight spaces.

Our QMA male right angle connector TC-402-QM-RA-LP datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.2:1	
Insertion Loss			0.173	dB
Passive Intermodulation			-150	dBc
Operating Voltage (DC)			1,000	Vdc
Insulation Resistance	5,000			MOhms

Electrical Specification Notes:
Insertion Loss is $0.1 * \text{sqrt}(F \text{GHz})$

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF TC-402-QM-RA-LP](#)

QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF



RF Connectors Technical Data Sheet

Mechanical Specifications

Size

 Length
 Width/Dia.

 0.75 in [19.05 mm]
 0.413 in [10.49 mm]

Mating Cycles

Cable Retention Force

100 Cycles

33 lbs [14.97 kg]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Silver 200 μ in
Insulation	PTFE	
Body	Brass	Tri-Metal 80 μ in
Coupling Nut	Brass	Tri-Metal 80 μ in

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Shock

MIL-STD 202G, Meth. 213, Cond. I

Vibration

MIL-STD 202G, Meth. 204, Cond. D

Thermal Shock

MIL-STD 202G, Meth. 107, Cond. B

Environmental Specification Notes:

Climatic Class: IEC 60068 40/85/21

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF TC-402-QM-RA-LP](#)



QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF

RF Connectors Technical Data Sheet

T **TIMES** MICROWAVE SYSTEMS
An Amphenol Company





TC-402-QM-RA-LP

QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [QMA Male Right Angle Low PIM Connector Solder Attachment for TFT-402, TFT-402-LF TC-402-QM-RA-LP](https://www.pasternack.com/qma-male-tft-402-connector-tc-402-qm-ra-lp-p.aspx)

URL: <https://www.pasternack.com/qma-male-tft-402-connector-tc-402-qm-ra-lp-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

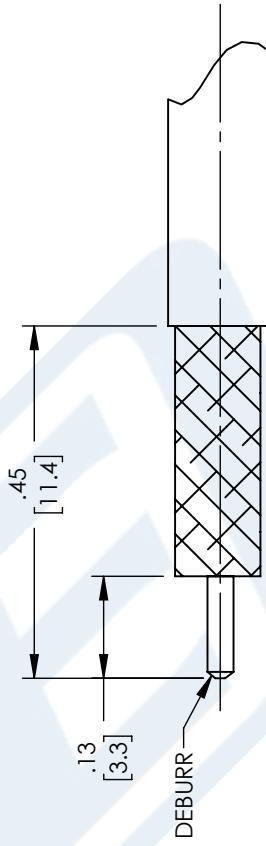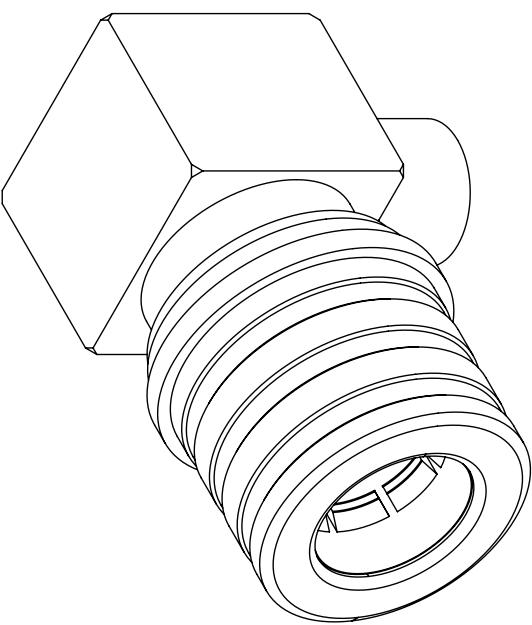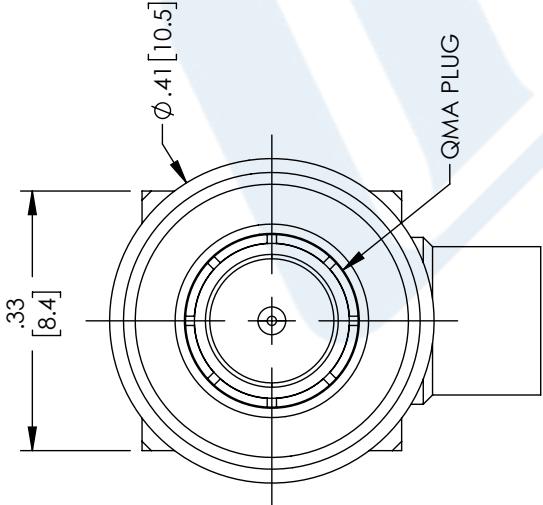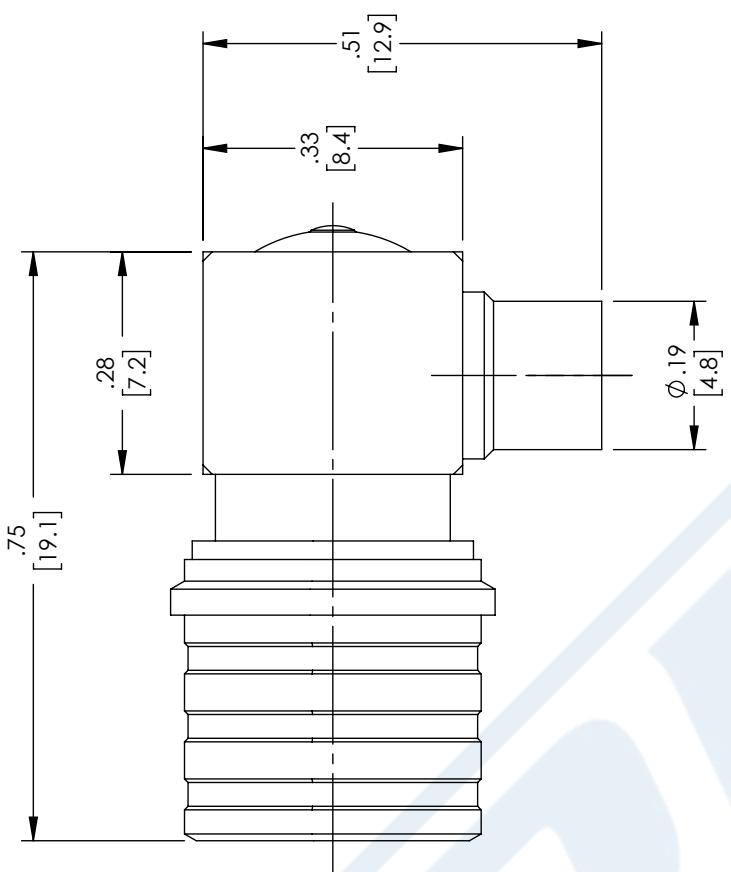

RECOMMENDED CABLE STRIPPING DIM'S
Connector adds: 0 mm

 PASTERACK an INFINITE® brand		THIRD-ANGLE PROJECTION  THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERACK CORPORATION. ALL RIGHTS RESERVED.																					
PASTERACK an INFINITE® brand	Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Website: www.pasternack.com E-mail: sales@pasternack.com																						
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	TOLERANCES: <table border="1"> <tr> <td>X = ± .2</td> <td>FRACTIONS [5/08]</td> </tr> <tr> <td>XX = ± .02</td> <td>[.51]</td> </tr> <tr> <td>XXX = ± .005</td> <td>[.13]</td> </tr> </table> ± 1/32 ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: <table border="1"> <tr> <td>L ≤ 12</td> <td>[305]</td> <td>= +1[28] / -0</td> </tr> <tr> <td>12 [305] < L ≤ 60</td> <td>[1524]</td> <td>= +2[51] / -0</td> </tr> <tr> <td>60 [1524] < L ≤ 120</td> <td>[3048]</td> <td>= +4[102] / -0</td> </tr> <tr> <td>120 [3048] < L ≤ 300</td> <td>[7620]</td> <td>= +6[152] / -0</td> </tr> <tr> <td>300 [7620] < L</td> <td>[2000]</td> <td>= +5[61] / -0</td> </tr> </table>	X = ± .2	FRACTIONS [5/08]	XX = ± .02	[.51]	XXX = ± .005	[.13]	L ≤ 12	[305]	= +1[28] / -0	12 [305] < L ≤ 60	[1524]	= +2[51] / -0	60 [1524] < L ≤ 120	[3048]	= +4[102] / -0	120 [3048] < L ≤ 300	[7620]	= +6[152] / -0	300 [7620] < L	[2000]	= +5[61] / -0	SHEET 1 OF 1 SCALE 4:1 REV A
X = ± .2	FRACTIONS [5/08]																						
XX = ± .02	[.51]																						
XXX = ± .005	[.13]																						
L ≤ 12	[305]	= +1[28] / -0																					
12 [305] < L ≤ 60	[1524]	= +2[51] / -0																					
60 [1524] < L ≤ 120	[3048]	= +4[102] / -0																					
120 [3048] < L ≤ 300	[7620]	= +6[152] / -0																					
300 [7620] < L	[2000]	= +5[61] / -0																					

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION, CONTRARY TO U.S. LAW PROHIBITED.



Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket

RF Cables Technical Data Sheet

TFT-5G-402

Times Microwave Systems Coax Cable Specification

Configuration

- Low PIM Flexible Cable
- 2 Shield(s)

Features

- PIM < -160 dBc
- UL910 Plenum Rated Cable
- Lightweight and Extremely Flexible

- Low Loss
- Good Shielding >80 dB
- UV Resistant Jacket

Applications

- Base Stations
- Antenna Pigtailed
- Distributed Antenna Systems

- (DAS)
- Plenum Installations
- Small Cells

- Multi-Carrier Communication Systems

Description


TFT-5G-402 low pim flexible coax cable by Times Microwave is part of our full line of RF components available for same-day shipping. The TFT-5G-402 plenum rated coaxial cable features a taped PTFE dielectric, solid copper center conductor and a dual-braid outer conductor. These features combine to make the Times Microwave TFT-5G-402 an extremely flexible, low loss and low PIM coax cable that is well suited for Distributed Antenna Systems (DAS), plenum installations or small cells. The tough, FEP jacket provides moisture, UV protection and resistance to corrosive environments.

Our datasheet specifications and drawing with dimensions for Times Microwave TFT-5G-402 coax cable are shown below in this PDF. Whether the need is to provide a low PIM jumper connection, low PIM antenna pigtailed or simply create a custom cable assembly configuration, Pasternack has the right TFT-5G-402 cable assemblies for the job.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Impedance		50		Ohms
Velocity of Propagation		76		%
Shielding Effectiveness	80			dB
Passive Intermodulation			-160	dBc
Nominal Capacitance	26.7 [87.6]			pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket TFT-5G-402](#)



Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket

RF Cables Technical Data Sheet

TFT-5G-402

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	0.45	1.9	2.3	4.9	5.8	GHz
Attenuation, Typ	7.9	16.4	18.2	27	29.5	dB/100ft
	25.92	53.81	59.71	88.58	96.78	dB/100m
Input Power (CW), Max	430	200	180	120	110	Watts

Mechanical Specifications

Diameter	0.16 in [4.06 mm]
Weight	0.028 lbs/ft [0.04 kg/m]
Min. Bend Radius (Installation)	0.75 in [19.05 mm]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper, 1 Strand	0.037 in [0.94 mm]
Conductor Type	Solid	
Dielectric	PTFE	0.113 in [2.87 mm]
First Shield	Tin	0.121 in [3.07 mm]
Outer Conductor	Copper, Tin	0 in [0 mm]
Jacket	FEP, Blue	0.16 in [4.06 mm]

Environmental Specifications

Temperature	
Operating Range	-55 to +150 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket TFT-5G-402](#)



Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket

RF Cables Technical Data Sheet

TFT-5G-402

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket TFT-5G-402](#)

URL: <https://www.pasternack.com/low-pim-flexible-tft-5g-402-fep-jacket-tin-outer-conductor-double-shielded-tft-5g-402-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

TFT-5G-402 CAD Drawing

Low PIM Flexible TFT-5G-402 Coax Cable Double Shielded with Blue FEP Jacket

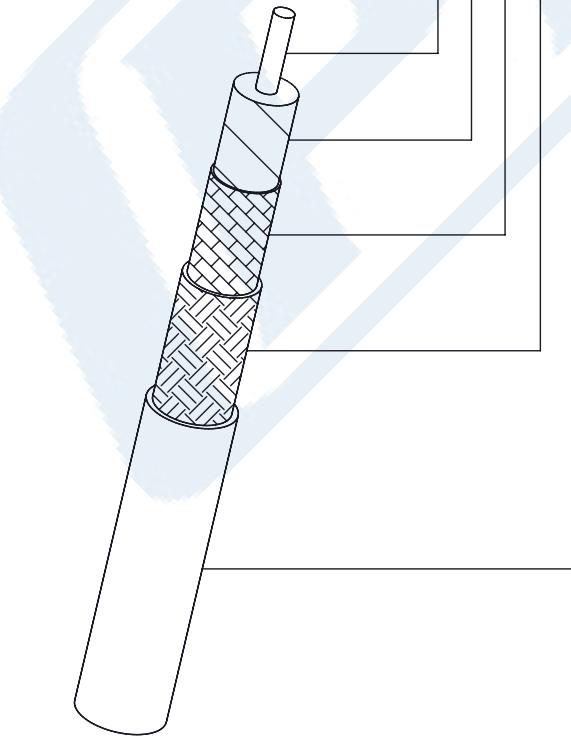REV. A					DESCRIPTION INITIAL RELEASE		DATE 09/13/2022	APPROVED A. GANWANI															
REV. A					DESCRIPTION INITIAL RELEASE		DATE 09/13/2022	APPROVED A. GANWANI															
REVISONS																							
																							
<table border="1"> <tr> <td>Center Conductor</td> <td>.037 [0.94]</td> <td>Bare Copper</td> </tr> <tr> <td>Dielectric</td> <td>.113 [2.87]</td> <td>Taped PTFE</td> </tr> <tr> <td>Shield</td> <td>.121 [3.07]</td> <td>Tin Plated Flat Braid</td> </tr> <tr> <td>Outer Braid</td> <td>.138 [3.51]</td> <td>Tin Plated Copper Braid</td> </tr> <tr> <td>Jacket</td> <td>.160 [4.06]</td> <td>Blue FEP</td> </tr> </table>									Center Conductor	.037 [0.94]	Bare Copper	Dielectric	.113 [2.87]	Taped PTFE	Shield	.121 [3.07]	Tin Plated Flat Braid	Outer Braid	.138 [3.51]	Tin Plated Copper Braid	Jacket	.160 [4.06]	Blue FEP
Center Conductor	.037 [0.94]	Bare Copper																					
Dielectric	.113 [2.87]	Taped PTFE																					
Shield	.121 [3.07]	Tin Plated Flat Braid																					
Outer Braid	.138 [3.51]	Tin Plated Copper Braid																					
Jacket	.160 [4.06]	Blue FEP																					
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES: $X = \pm 2$ [5.08] FRACTIONS $XX = \pm .02$ [5.1] $\pm 1/32$ $XXX = \pm .005$ [1.3] ANGLES $\pm 1^\circ$ CABLE LENGTH (L) TOLERANCES: $L \leq 12$ [305] $= +1 [28] / -0$ $12 [305] < L \leq 60$ [1524] $= +2 [51] / -0$ $60 [1524] < L \leq 120$ [3048] $= +4 [102] / -0$ $120 [3048] < L \leq 300$ [7620] $= +6 [152] / -0$ $300 [7620] < L \leq +586L / -0$ - ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. </p>																							
<p>THIRD-ANGLE PROJECTION</p>  <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERACK CORPORATION ALL RIGHTS RESERVED</p> <p>PASTERACK an INFINITI® brand</p> <p>Pasterack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasterack.com E-mail: sales@pasterack.com</p> <p>SHEET 1 OF 1 SCALE N/A SIZE A CAGE CODE 53919 DRAWN BY K.DANG ITEM NO. TFT-5G-402 REV A</p>																							
<p>THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.</p> <p>T-Rev.D</p>																							