

3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax




PE3W17832

Configuration

- Connector 1: 3.5mm Male
- Connector 2: N Male Right Angle
- Cable Type: PE-SR402FLJ
- Coax Flex Type: Formable

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

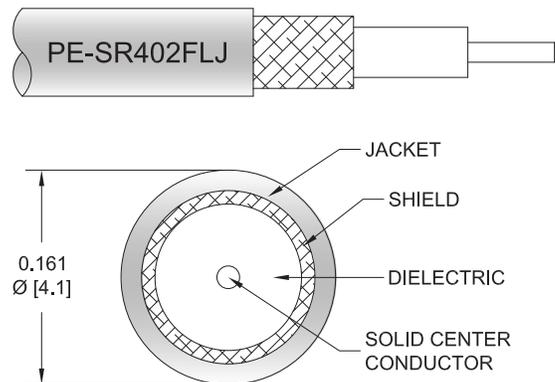

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W17832 3.5mm male to type N male right angle cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 3.5mm to type N cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FLJ coax. The PE3W17832 3.5mm male to type N male cable assembly operates to 8 GHz. The right angle type N interface on the PE-SR402FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.23 [27]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax



PE3W17832

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		500	1000	2000	4000	
PE3W17832	Custom Lengths Available	Insertion Loss (Typ.)	0.082	0.125	0.173	0.271	0.416	dB/ft	
			0.27	0.42	0.57	0.89	1.37	dB/m	
PE3W17832-6	6 Inch	Insertion Loss (Typ.)	0.27	0.31	0.35	0.42	0.53	dB	0.102
PE3W17832-9	9 Inch	Insertion Loss (Typ.)	0.29	0.34	0.39	0.49	0.63	dB	0.11
PE3W17832-12	12 Inch	Insertion Loss (Typ.)	0.32	0.37	0.43	0.56	0.73	dB	0.118
PE3W17832-18	18 Inch	Insertion Loss (Typ.)	0.36	0.43	0.52	0.69	0.94	dB	0.135
PE3W17832-24	24 Inch	Insertion Loss (Typ.)	0.4	0.49	0.61	0.83	1.15	dB	0.151

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.04*SQRT(FGHz) dB
 Loss due to Connector 2: 0.2 dB
 Base Weight: 0.118 pounds
 Additional Weight per Inch: 0.00267 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
 Weight 0.118 lbs [53.52 g]

Cable

Cable Type PE-SR402FLJ
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper, Silver
 Dielectric Type PTFE
 Outer Conductor 1 Material and Plating Tinned Copper Braid
 Jacket Material FEP, Black
 Jacket Diameter 0.161 in [4.09 mm]
 One Time Minimum Bend Radius 0.315 in [8 mm]
 Repeated Minimum Bend Radius 1.575 in [40.01 mm]

3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax



PE3W17832

Connectors

Description	Connector 1	Connector 2
Type	3.5mm Male	N Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles	500	
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Brass, Gold over Nickel
Contact Plating Specification	50 µin minimum	
Dielectric Type	PCTFE	PTFE
Body Material and Plating	Passivated Stainless Steel	Brass, Nickel
Body Plating Specification	SAE-AMS-2700	
Coupling Nut Material and Plating	Passivated Stainless Steel	Brass, Nickel
Coupling Nut Plating Specification	SAE-AMS-2700	
Hex Size	5/16 inch	
Torque	8 in-lbs 0.9 Nm	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax



PE3W17832

Typical Performance Data

How to Order

Part Number Configuration:

PE3W17832

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3W17832-12 = 12 inches long cable
PE3W17832-100cm = 100 cm long cable

3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax PE3W17832](#)

URL: <https://www.pasternack.com/3.5mm-male-to-n-male-cable-using-pe-sr402flj-pe3w17832-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W17832 CAD Drawing

3.5mm Male to N Male Right Angle Cable Using PE-SR402FLJ Coax

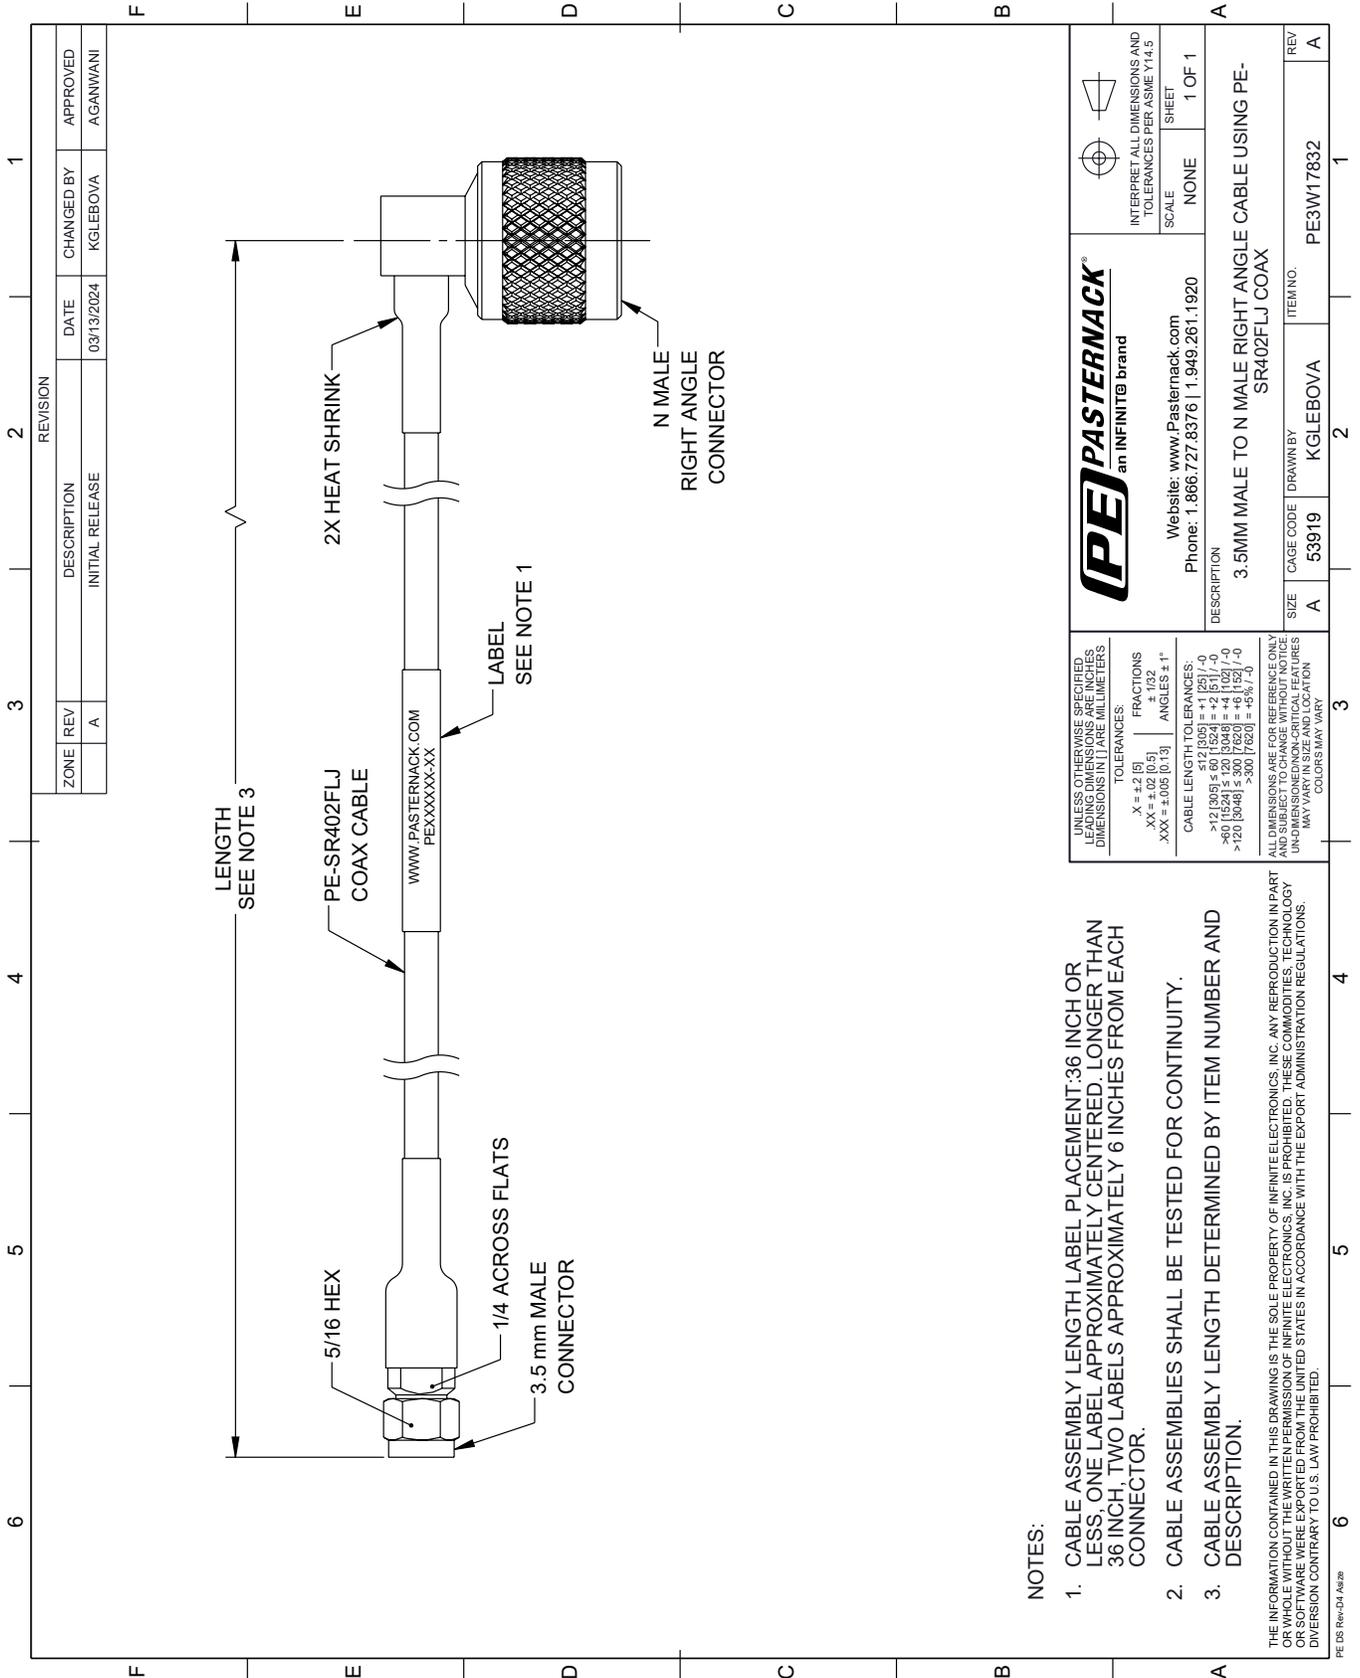

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT .36 INCH OR LESS; ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCH, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM NUMBER AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-04 Add2

REVISION		DATE	CHANGED BY	APPROVED	
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	03/13/2024	KGLEBOVA	AGANWANI

<p>an INFINITE brand</p>	<p>Website: www.Pasternack.com</p> <p>Phone: 1.866.727.8376 1.949.261.1920</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
	<p>DESCRIPTION: 3.5MM MALE TO N MALE RIGHT ANGLE CABLE USING PE-SR402FLJ COAX</p>	
SIZE: A	CAGE CODE: 53919	ITEM NO.: PE3W17832
DRAWN BY: KGLEBOVA		REV: A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.

TOLERANCES:
 .X = ±.2 [5] FRACTIONS ± 1/32
 .XX = ±.02 [0.5] ANGLES ± 1°
 .XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
 <12 [305] ≤ 60 [1524] = ±.1 [25] / -0
 >60 [1524] ≤ 120 [3048] = ±.4 [102] / -0
 >120 [3048] ≤ 300 [7620] = ±.6 [152] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.