


2.92mm Male to N Female Cable Using PE-SR402FLJ Coax



PE3W17841


Configuration

- Connector 1: 2.92mm Male
- Connector 2: N Female
- Cable Type: PE-SR402FLJ
- Coax Flex Type: Formable



Features

- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

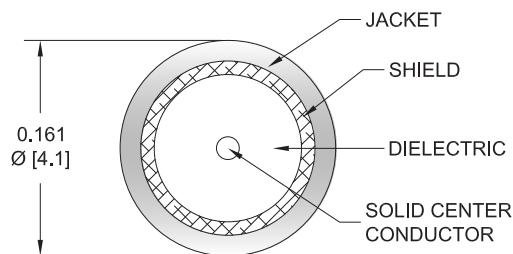

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W17841 2.92mm male to type N female cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 2.92mm to type N cable assembly has a male to female gender configuration with 50 ohm formable PE-SR402FLJ coax.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.23 [27]		Ohms/1000ft [Ohms/Km]

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.106 lbs [48.08 g]

Cable

Cable Type	PE-SR402FLJ
------------	-------------

2.92mm Male to N Female Cable Using PE-SR402FLJ Coax



PE3W17841

Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Outer Conductor 1 Material and Plating	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.161 in [4.09 mm]
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.575 in [40.01 mm]

Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	N Female
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Phosphor Bronze, Gold over Nickel
Contact Plating Specification	50 μ in minimum	
Dielectric Type	PCTFE	PTFE
Body Material and Plating	Stainless Steel, Gold over Nickel	Brass, Nickel
Body Plating Specification	50 μ in minimum	
Coupling Nut Material and Plating	Stainless Steel, Gold over Nickel	
Coupling Nut Plating Specification	50 μ in minimum	
Hex Size	5/16 inch	
Torque	8 in-lbs 0.9 Nm	

Environmental Specifications

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

2.92mm Male to N Female Cable Using PE-SR402FLJ Coax

**PE3W17841****Typical Performance Data****How to Order**

Part Number Configuration:

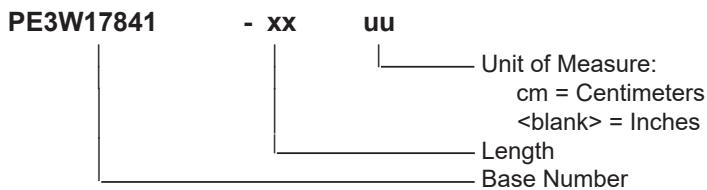

Example: PE3W17841-12 = 12 inches long cable
PE3W17841-100cm = 100 cm long cable

2.92mm Male to N Female Cable Using PE-SR402FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to N Female Cable Using PE-SR402FLJ Coax PE3W17841](#)

URL: <https://www.pasternack.com/2.92mm-male-to-n-female-cable-using-pe-sr402flj-pe3w17841-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W17841 CAD Drawing

2.92mm Male to N Female Cable Using PE-SR402FLJ Coax

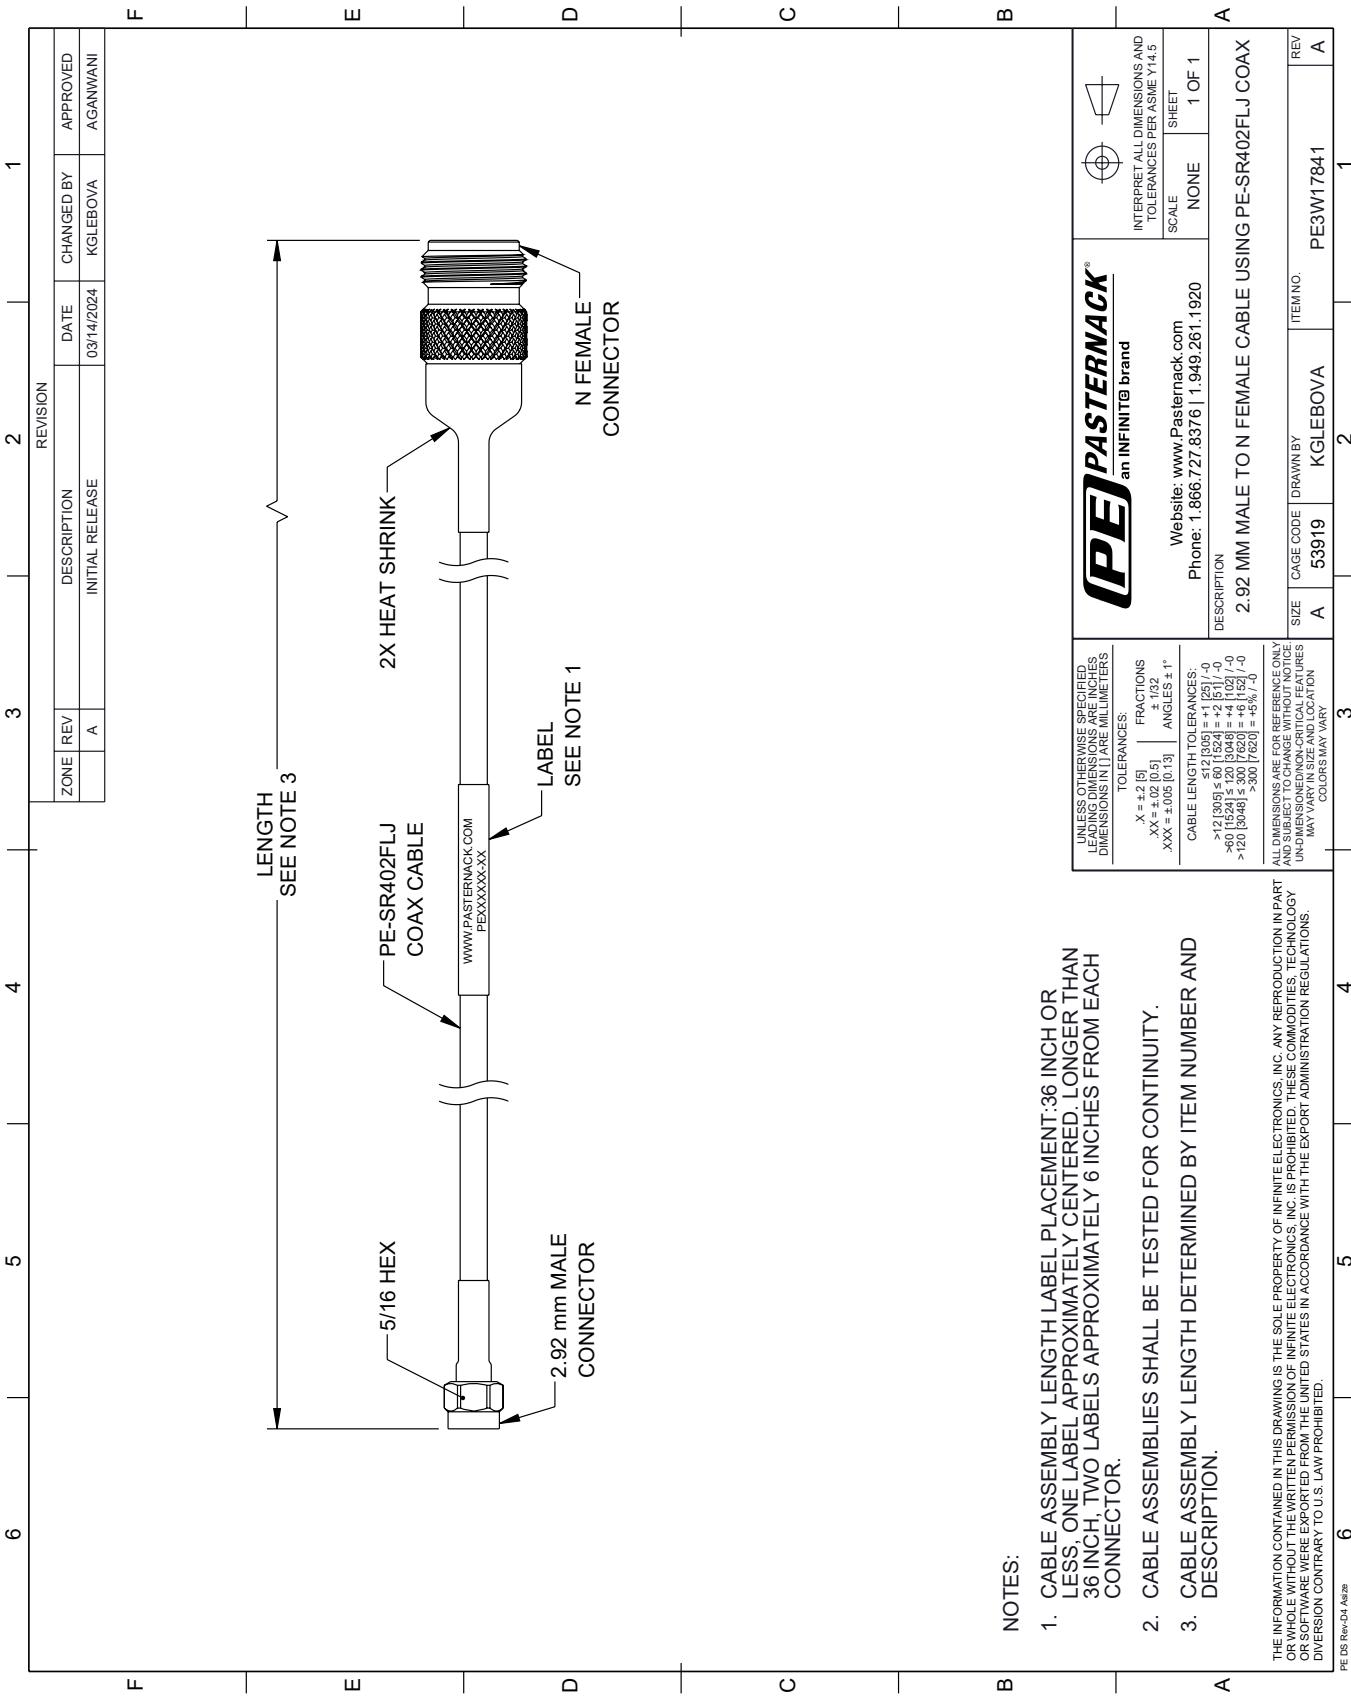

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:36 INCH OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCH, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM NUMBER AND DESCRIPTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.