

NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax

PE3W17852




Configuration

- Connector 1: NEX10 Male
- Connector 2: NEX10 Male Right Angle
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

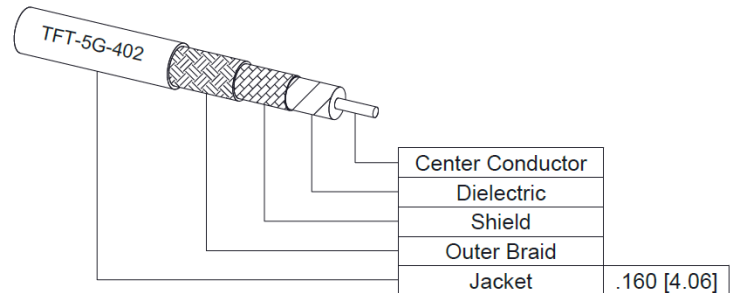

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications

Description

Pasternack's PE3W17852 NEX10 male to NEX10 male right angle cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack NEX10 to NEX10 cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3W17852 NEX10 male to NEX10 male cable assembly operates to 4 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle NEX10 interface on the TFT-5G-402 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-160	dBc
Capacitance		26.7 [87.6]		pF/ft [pF/m]

Specifications by Frequency

NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax



PE3W17852

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	450	500	1000	2300	4000	MHz	
PE3W17852	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.08	0.111	0.182	0.239	dB/ft	
			0.26	0.27	0.37	0.6	0.79	dB/m	
PE3W17852-12	12 inch	Insertion Loss (Typ.)	0.38	0.39	0.42	0.49	0.54	dB	0.088
PE3W17852-24	24 inch	Insertion Loss (Typ.)	0.46	0.47	0.53	0.67	0.78	dB	0.117
PE3W17852-36	36 inch	Insertion Loss (Typ.)	0.54	0.55	0.64	0.85	1.02	dB	0.145
PE3W17852-60	60 inch	Insertion Loss (Typ.)	0.7	0.71	0.86	1.21	1.5	dB	0.201
PE3W17852-200CM	200 CM	Insertion Loss (Typ.)	0.82	0.84	1.03	1.5	1.87	dB	0.245

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.088 pounds
Additional Weight per Inch:	0.00234 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.088 lbs [39.92 g]

Cable

Cable Type	TFT-5G-402
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Tin
Outer Conductor 1 Material and Plating	Copper, Tin
Jacket Material	FEP, Blue
Jacket Diameter	0.16 in [4.06 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]

NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax



PE3W17852

Connectors

Description	Connector 1	Connector 2
Type	NEX10 Male	NEX10 Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles	100	500
Contact Material and Plating	Brass, Silver	Brass, Silver
Contact Plating Specification	100 µin	200 µin
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Tri-Metal
Body Plating Specification	100 µin	100 µin
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 µin	100 µin
Torque	9 in-lbs 1.02 Nm	13 in-lbs 1.47 Nm

Environmental Specifications

Operating Range Temperature -40 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax



PE3W17852

Typical Performance Data

How to Order

Part Number Configuration: **PE3W17852** **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3W17852-12 = 12 inches long cable
PE3W17852-100cm = 100 cm long cable


NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax PE3W17852](#)

URL: <https://www.pasternack.com/nex10-male-to-nex10-male-low-pim-cable-using-tft-5g-402-pe3w17852-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W17852 CAD Drawing
NEX10 Male to NEX10 Male Right Angle Low PIM Cable Using TFT-5G-402 Coax

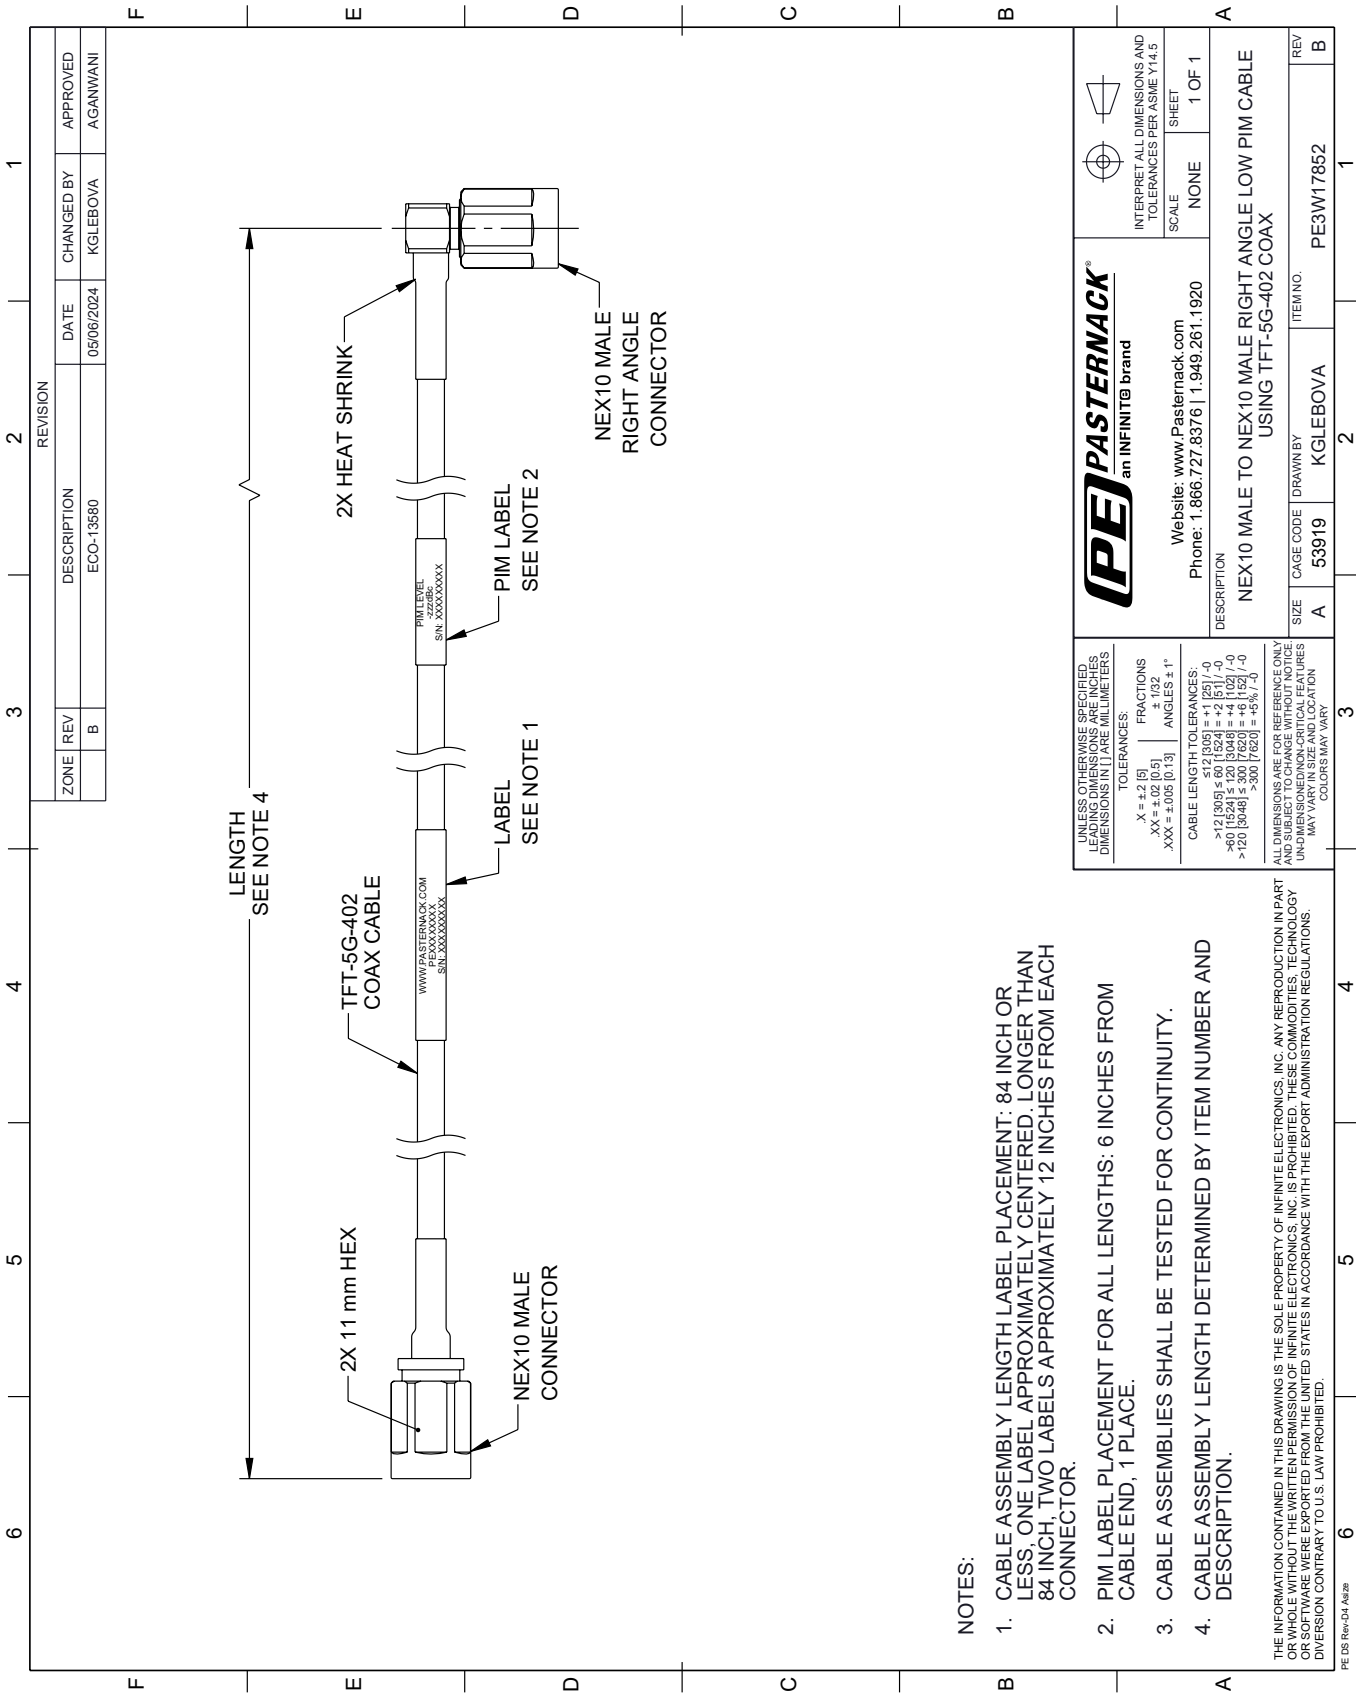

- NOTES:
- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 84 INCH OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 84 INCH, TWO LABELS APPROXIMATELY 12 INCHES FROM EACH CONNECTOR.
- 2. PIM LABEL PLACEMENT FOR ALL LENGTHS: 6 INCHES FROM CABLE END, 1 PLACE.
- 3. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- 4. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM NUMBER AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, DIMENSIONS IN [] ARE MILLIMETERS		PE PASTERNAK an INFINITE brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		Website: www.Pasternack.com		SCALE	
.X = ±.2 [5]		Phone: 1.866.727.8376 1.949.261.1920		NONE	
.XX = ±.02 [0.5]				SHEET	
.XXX = ±.005 [0.13]				1 OF 1	
ANGLES ± 1°					
CABLE LENGTH TOLERANCES:		DESCRIPTION			
>12 [305] ≤ 60 [1524] = ±1 [25] / -0		NEX10 MALE TO NEX10 MALE RIGHT ANGLE LOW PIM CABLE			
>60 [1524] ≤ 120 [3048] = ±4 [102] / -0		USING TFT-5G-402 COAX			
>120 [3048] ≤ 300 [7620] = ±5% / -0					
ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN [] ARE MILLIMETERS. COLORS MAY VARY.		SIZE		REV	
		A		B	
		CAGE CODE		ITEM NO.	
		53919		PE3W17852	
		DRAWN BY			
		KGLEBOVA			