

NEX10 Male to NEX10 Female Low PIM Cable Using SPF-250 Coax




PE3W17856

Configuration

- Connector 1: NEX10 Male
- Connector 2: NEX10 Female
- Cable Type: SPF-250
- Coax Flex Type: Corrugated

Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- 83% Phase Velocity
- FRPE Jacket

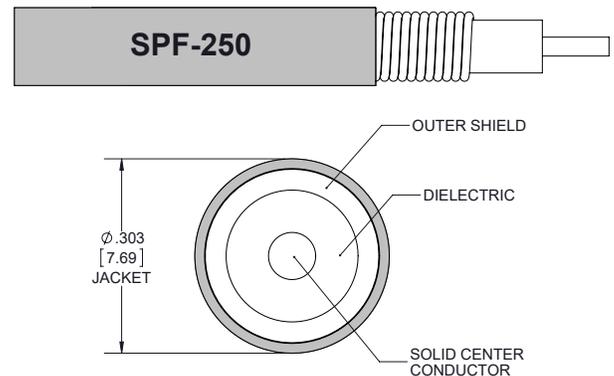

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications

Description

Pasternack's PE3W17856 NEX10 male to NEX10 female cable using SPF-250 coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack NEX10 to NEX10 cable assembly has a male to female gender configuration with 50 ohm corrugated SPF-250 coax. The PE3W17856 NEX10 male to NEX10 female cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
Passive Intermodulation			-160	dBc
Capacitance		24 [78.74]		pF/ft [pF/m]
Inductance		0.054 [0.18]		uH/ft [uH/m]

Specifications by Frequency

NEX10 Male to NEX10 Female Low PIM
Cable Using SPF-250 Coax



PE3W17856

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	450	500	1000	2500	5800	
PE3W17856	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.04	0.06	0.103	0.167	dB/ft	
			0.14	0.14	0.2	0.34	0.55	dB/m	
PE3W17856-12	12 inch	Insertion Loss (Typ.)	0.25	0.25	0.26	0.31	0.37	dB	0.092
PE3W17856-24	24 inch	Insertion Loss (Typ.)	0.29	0.29	0.32	0.41	0.54	dB	0.145
PE3W17856-36	36 inch	Insertion Loss (Typ.)	0.33	0.33	0.38	0.51	0.7	dB	0.197
PE3W17856-60	60 inch	Insertion Loss (Typ.)	0.41	0.41	0.5	0.72	1.04	dB	0.301
PE3W17856-50CM	50 CM	Insertion Loss (Typ.)	0.27	0.27	0.3	0.37	0.48	dB	0.126

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
 Loss due to Connector 2: 0.1 dB
 Base Weight: 0.092 pounds
 Additional Weight per Inch: 0.00434 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
 Weight 0.092 lbs [41.73 g]

Cable

Cable Type SPF-250
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Aluminum
 Dielectric Type Foam PE
 Number of Shields 1
 Outer Conductor 1 Material and Plating Copper
 Jacket Material FRPE, Black
 Jacket Diameter 0.303 in [7.7 mm]
 One Time Minimum Bend Radius 1.25 in [31.75 mm]
 Bending Moment 0.5 lbs-ft [0.68 N-m]

NEX10 Male to NEX10 Female Low PIM
Cable Using SPF-250 Coax



PE3W17856

Connectors

Description	Connector 1	Connector 2
Type	NEX10 Male	NEX10 Female
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Silver	Bronze, Silver
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

NEX10 Male to NEX10 Female Low PIM
Cable Using SPF-250 Coax



PE3W17856

Typical Performance Data


How to Order

Part Number Configuration:

PE3W17856

- xx

uu

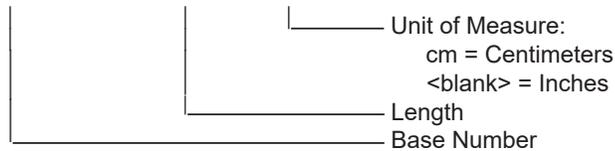

Example: PE3W17856-12 = 12 inches long cable
PE3W17856-100cm = 100 cm long cable

NEX10 Male to NEX10 Female Low PIM Cable Using SPF-250 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [NEX10 Male to NEX10 Female Low PIM Cable Using SPF-250 Coax PE3W17856](#)

URL: <https://www.pasternack.com/nex10-male-to-nex10-female-low-pim-cable-using-spf-250-pe3w17856-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W17856 CAD Drawing

NEX10 Male to NEX10 Female Low PIM Cable Using SPF-250 Coax

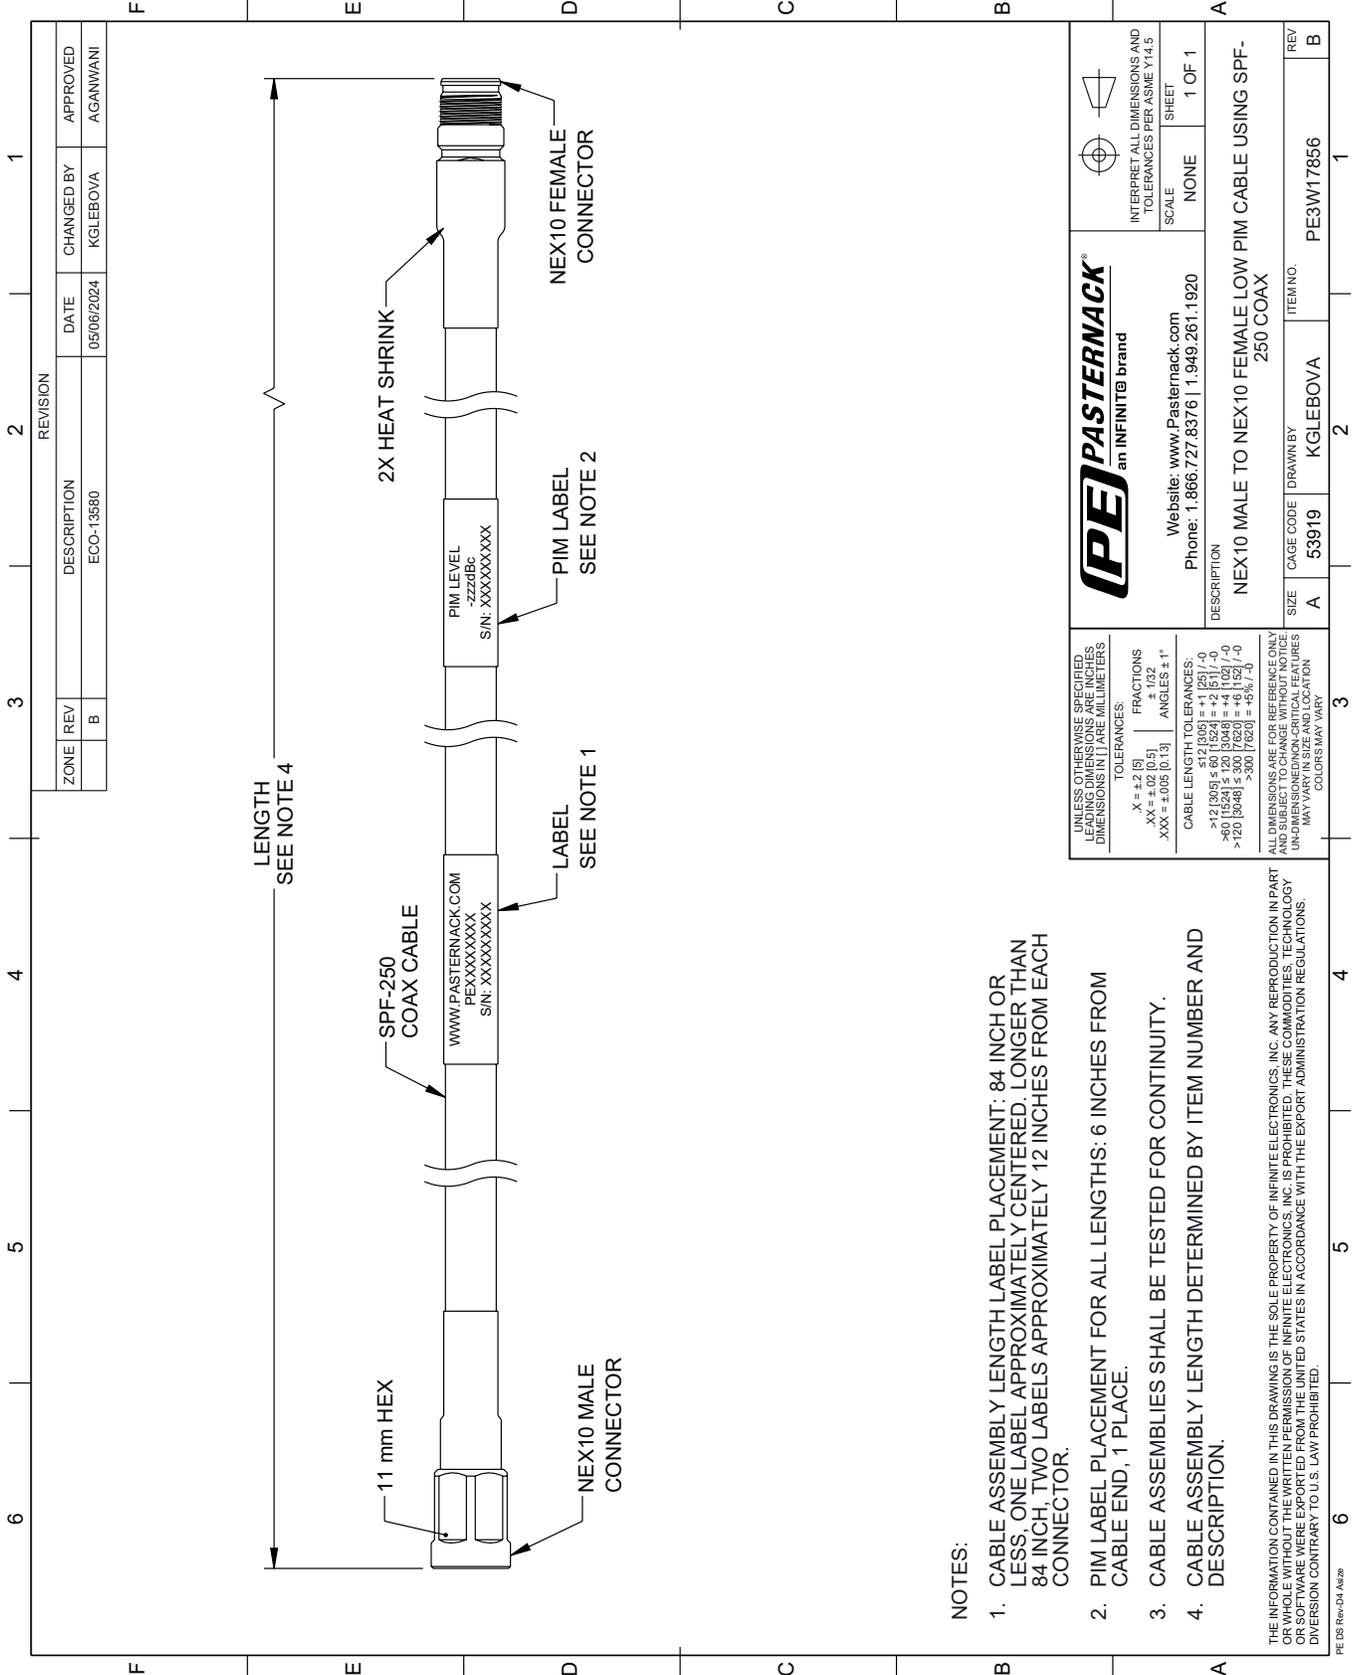

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 84 INCH OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 84 INCH, TWO LABELS APPROXIMATELY 12 INCHES FROM EACH CONNECTOR.
2. PIM LABEL PLACEMENT FOR ALL LENGTHS: 6 INCHES FROM CABLE END, 1 PLACE.
3. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM NUMBER AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-04 Add2

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV	DESCRIPTION	ECO-13580	AGANWANI
	B			

		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
		SCALE	NONE
Website: www.Pastermack.com Phone: 1.866.727.8376 1.949.261.1920		SHEET	1 OF 1
DESCRIPTION NEX10 MALE TO NEX10 FEMALE LOW PIM CABLE USING SPF-250 COAX		SIZE	ITEM NO.
A	53919	DRAWN BY	KGLEBOVA
B		ITEM NO.	PE3W17856

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.

TOLERANCES:
 .X = ±.2 [5]
 .XX = ±.02 [0.5]
 .XXX = ±.005 [0.13]

FRACTIONS
 ± 1/32
 ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 <12 [305] ≤ 60 [1524] = +1 [25] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS/DIMENSIONAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.