
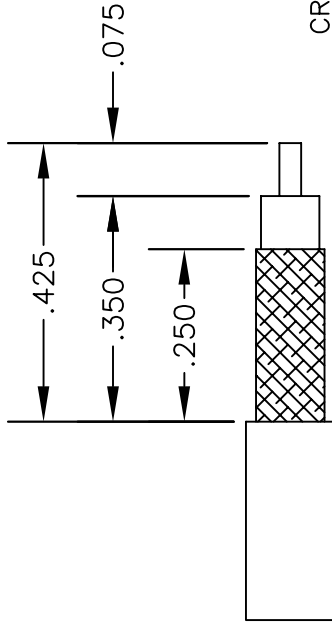


| MATERIALS |                     |
|-----------|---------------------|
| BODY      | BRASS NICKEL PLATED |
| CONTACT   | GOLD PLATED         |
| INSULATOR | PTFE                |
|           |                     |

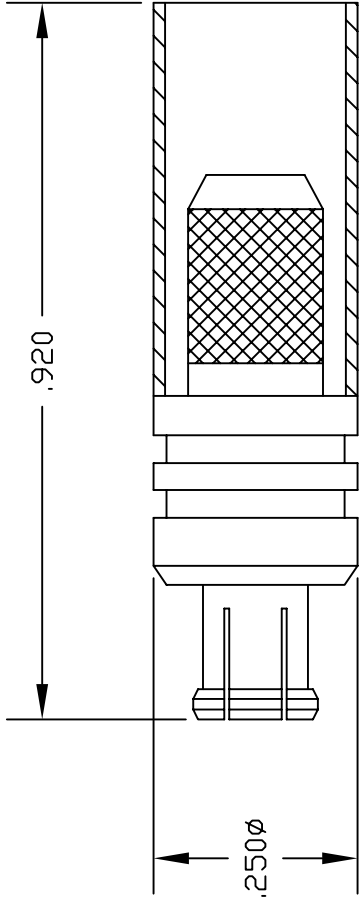

STRIPPING DIMENSIONS

CRIMP SIZE REQUIRED \_\_\_\_\_

FERRULE: .213" HEX CRIMP TOOL



PASTERNAK ENTERPRISES, INC.  
P.O. BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
COAXIAL & FIBER OPTICS

DWG TITLE  
**PE4880**



DES. MCX PLUG, CRIMP ATTACHMENT FOR RG58

|        |                |          |        |       |     |     |
|--------|----------------|----------|--------|-------|-----|-----|
| SIZE A | FSCM NO. 53919 | CAD FILE | 061202 | SCALE | N/A | 127 |
|--------|----------------|----------|--------|-------|-----|-----|

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

| MATERIALS |                     |
|-----------|---------------------|
| BODY      | BRASS NICKEL PLATED |
| CONTACT   | GOLD PLATED         |
| INSULATOR | PTFE                |
|           |                     |

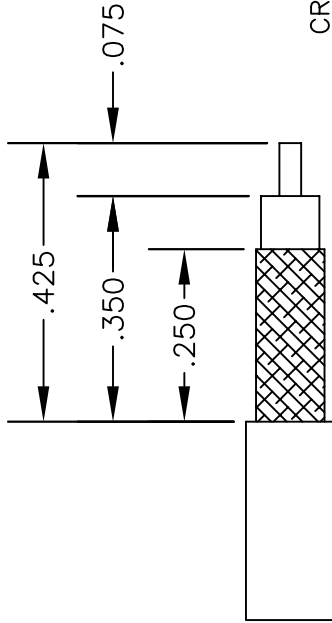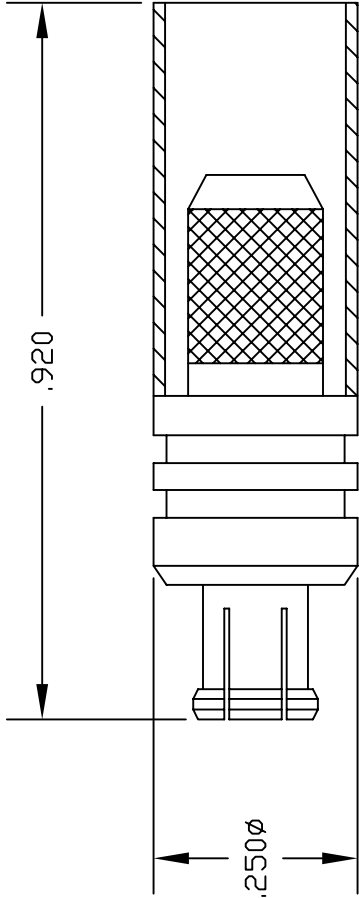

STRIPPING DIMENSIONS

CRIMP SIZE REQUIRED

FERRULE: .213" HEX CRIMP TOOL




PASTERNAK ENTERPRISES, INC.  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
COAXIAL & FIBER OPTICS

|               |                |                                          |        |           |
|---------------|----------------|------------------------------------------|--------|-----------|
| DWG TITLE     |                | DES. MCX PLUG, CRIMP ATTACHMENT FOR RG58 |        |           |
| <b>PE4880</b> |                |                                          |        |           |
| SIZE A        | FSCM NO. 53919 | CAD FILE                                 | 061202 | SCALE N/A |
|               |                |                                          |        | 127       |

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

## Low PIM Flexible TCOM-195 Coax Cable Triple Shielded with Black PE Jacket



### TCOM-195

#### Configuration

- Low PIM Flexible Cable
- 3 Shield(s)

#### Features

- Lightweight and Extremely Flexible
- PIM < -155 dBc
- RF Shielding >100 dB
- Low Loss Dielectric 80% VoP
- UV Resistant, Life Expectancy > 20 Years

#### Applications

- Wireless Base Station Interconnect
- Distributed Antenna Systems (DAS)
- Outdoor Applications
- Antenna Jumpers
- Small Cell

#### Description

The TCOM-195 part number from Pasternack is a TCOM-195 low PIM coax cable that is flexible. Pasternack flexible coax RF cable has an impedance of 50 Ohm and a foam polyethylene dielectric. Our TCOM-195 coax cable is constructed with a 0.195-inch jacket made of polyethylene. This coaxial cable has a dielectric withstanding voltage of 1000 Vdc. This black low PIM coax cable has a nominal capacitance of 25.40 pF/Ft

This TCOM-195 flexible RF cable has a shield count of 3. Our coax cable from Pasternack has a maximum frequency of 18 GHz. The maximum passive intermodulation of this low PIM cable is -155 dBc. Additional specifications for this TCOM-195 RF coaxial cable are on our downloadable PDF datasheet above. This low PIM RF cable has a one-time minimum bend radius of 0.5 inches and a repeat minimum bend radius of 2 inches. Our flexible 50 Ohm coax cable has a peak power rating of 2500 watts.


Our TCOM-195 coax cable can operate at temperatures ranging from -40 to 85 deg C. The black-colored coax RF cable has a typical insertion loss/attenuation of 4.5, 8, 11, 17, 27, 39, and 54 dB/100ft at frequencies of 150 MHz, 450 MHz, 900 MHz, 2000 MHz, 5000 MHz, 10000 MHz and 18000 MHz respectively. Our TCOM-195 flexible RF cable has a solid copper center conductor. This coaxial cable features a dual shield of tinned copper braid over the silver plated copper braid.

Pasternack TCOM-195 low PIM coax cables are part of our RF, microwave, and millimeter wave components. These flexible cables and our other RF parts are available for same-day shipping worldwide. Custom RF cable assemblies using TCOM-195, or other coax can be built and shipped the same business day as well.

#### Electrical Specifications

| Description                          | Minimum | Typical     | Maximum | Units        |
|--------------------------------------|---------|-------------|---------|--------------|
| Frequency Range                      | DC      |             | 18      | GHz          |
| Impedance                            |         | 50          |         | Ohms         |
| Velocity of Propagation              |         | 80          |         | %            |
| Time Delay                           |         | 1.27 [4.17] |         | ns/ft [ns/m] |
| Passive Intermodulation              |         |             | -155    | dBc          |
| Dielectric Withstanding Voltage (DC) |         |             | 1,000   | Vdc          |
| Jacket Spark                         |         |             | 3,000   | Vrms         |

## Low PIM Flexible TCOM-195 Coax Cable Triple Shielded with Black PE Jacket



### TCOM-195

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units        |
|-------------------------------|---------|--------------|---------|--------------|
| Inner Conductor DC Resistance |         |              | 7.16    | Ohms/1000ft  |
| Outer Conductor DC Resistance |         |              | 3.42    | Ohms/1000ft  |
| Nominal Capacitance           |         | 25.4 [83.33] |         | pF/ft [pF/m] |
| Nominal Inductance            |         | 0.064 [0.21] |         | uH/ft [uH/m] |
| Input Power (Peak)            |         |              | 2.5     | kWatts       |

#### Performance by Frequency Band

| Description      | F1    | F2    | F3    | F4    | F5    | Units    |
|------------------|-------|-------|-------|-------|-------|----------|
| Frequency        | 0.15  | 0.45  | 0.9   | 2     | 5     | GHz      |
| Attenuation, Typ | 4.5   | 8     | 11    | 17    | 27    | dB/100ft |
|                  | 14.76 | 26.25 | 36.09 | 55.77 | 88.58 | dB/100m  |

| Description      | F6     | F7     | F8 | F9 | F10 | Units    |
|------------------|--------|--------|----|----|-----|----------|
| Frequency        | 10     | 18     |    |    |     | GHz      |
| Attenuation, Typ | 39     | 54     |    |    |     | dB/100ft |
|                  | 127.95 | 177.17 |    |    |     | dB/100m  |

#### Mechanical Specifications

|                                 |                          |
|---------------------------------|--------------------------|
| Diameter                        | 0.195 in [4.95 mm]       |
| Weight                          | 0.035 lbs/ft [0.05 kg/m] |
| Min. Bend Radius (Installation) | 0.5 in [12.7 mm]         |
| Min. Bend Radius (Repeated)     | 2 in [50.8 mm]           |
| Bending Moment                  | 0.2 lbs-ft [0.27 N-m]    |
| Flat Plate Crush                | 15 lbs/in [0.27 kg/mm]   |


#### Construction Specifications

| Description     | Material and Plating                   | Diameter           |
|-----------------|----------------------------------------|--------------------|
| Inner Conductor | Copper, 1 Strand                       | 0.037 in [0.94 mm] |
| Conductor Type  | Solid                                  |                    |
| Dielectric      | PE (F)                                 | 0.11 in [2.79 mm]  |
| First Shield    | Silver Plated Copper Braid             | 0.12 in [3.05 mm]  |
| Second Shield   | Tinned Copper Braid over Aluminum Tape | 0.148 in [3.76 mm] |
| Jacket          | PE, Black                              | 0.195 in [4.95 mm] |

#### Environmental Specifications

|                 |                  |
|-----------------|------------------|
| Temperature     |                  |
| Operating Range | -40 to +85 deg C |

## Low PIM Flexible TCOM-195 Coax Cable Triple Shielded with Black PE Jacket



### TCOM-195

---

|                    |                  |
|--------------------|------------------|
| Installation Range | -40 to +85 deg C |
| Storage Range      | -70 to +85 deg C |

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Low PIM Flexible TCOM-195 Coax Cable Triple Shielded with Black PE Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Flexible TCOM-195 Coax Cable Triple Shielded with Black PE Jacket TCOM-195](#)

URL: <https://www.pasternack.com/low-pim-flexible-tcom240-bulk-pe-jacket-silver-plated-copper-braid-over-tinned-copper-braid-outer-conductor-double-shielded-tcom-240-bulk-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

TCOM-195 CAD Drawing

Low PIM Flexible TCOM-195 Coax Cable Triple Shielded with Black PE Jacket

