NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS. NOTICE OF PROPRIETARY RIGHTS REVISION DESCRIPTION **DFTM** DATE APPD DATE RELEASED FOR PRODUCTION | K. A. M. 2/12/10 3/1/10 Α J.D.B. В CHANGED PER CDC #35214 7/16/12 7/25/12 D. J. H. .D.B. (39.5) -· 19.7 — · 1.1 X 2 13.45 -Ø7.5 Ø9.5 Ø10.9 Ø12.4 16 -5.4 15 - Ø13.4 X 2 Ø12.7 X 2 32 HEX. Ø25 Reference standard IEC60169-4 0.5 X 45° I. Electric Performance CABLE PREP Nominal Impedance(Ω): USE CST-400 DC-3GHz Frequency Range: (3192 - 004)**VSWR** ≤1.15 .429" HEX. **INSERT LOSS:** ≤ 0.05 Insulation resistance (M Ω) ≥10000 IV Environment Proof voltage (V) 2500 -55°C~+155°C Temp.range Conductor resistance ($m\Omega$) outer conductor < 0.2 Weather standard IEC 60068 55 / 155/ 56 inner conductor < 0.8 US MIL-STD 202, Meth. 107, Cond. B Thermal shock US MIL-STD 202, Meth. 204, Cond. B Vibration II. Mechanical Performance US MIL-STD 202, Meth. 213, Cond. I Shock 25N.m Pin torque Waterproofing standard IP67 1000N (Nut)Whorl pull Tensile force(cable-connect) 400N V. Assembly: inner conductor installed and outer conductor crimped Torsion(cable-connect) 2N.m VI. ROHS Compliant. III. Material and plating Plating Component Material Inner conductor Spring Copper Ag 200 micro inches Copper-tin-zin (Albaloy) 150 micro inches Outer conductor Brass Copper-tin-zin (Albaloy) 150 micro inches Ferrule copper Nut **Brass** Copper-tin-zin (Albaloy) 150 micro inches Silicone rubber Gasket PTFE Insulator DFTM.K.A.M. MATL: UNLESS OTHERWISE SPECIFIED TIMES MICROWAVE SYSTEMS DATE 2/12/10 ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISHN/A RMS MAX. REMOVE ALL BURRS N/A MAX. BREAK CHKD. J. D. B EZ-400-716M-X MACHINE CORNERS N/A MAX. FILLET R. TOLERANCES ON DECIMALS
XX ± N/A DATE 3/1/10 USED ON: 1 - 17/16 MALE FOR LMR-400 CABLE $XXX \pm N/A$ APPD. J. D. B EZ/CRIMP/NO BRAID TRIM ANGLES ± N/A FRACTIONS ± N/A DO NOT SCALE DRAWING CODE 68999 DATE 3/1/10 SD3190-2524 SCALE: of N/A





N Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

RF Connectors
Technical Data Sheet

PE44522

Configuration

- N Male Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: PE-C400, PE-B400, PE-

B405, LMR-400, LMR-400-DB, LMR-400-UF, .400 inch

• 18 mm Hex

Features

- Max. Operating Frequency 11 GHz
- Gold Plated Brass Contact

• 15 µin minimum contact plating

Applications

• General Purpose Test

Custom Cable Assemblies

Description

Pasternack's PE44522 type N male connector with crimp/solder attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF and .400 inch is part of our full line of RF components available for same-day shipping. Our type N male connector operates up to a maximum frequency of 11 GHz.

Our type N male connector PE44522 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz

Mechanical Specifications

Size

 Length
 1.48 in [37.59 mm]

 Width/Dia.
 0.83 in [21.08 mm]

 Weight
 0.075 lbs [34.02 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44522

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





N Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

RF Connectors
Technical Data Sheet

PE44522

Material Specifications

Description	Material	Plating
Contact	Brass	Gold 15 µin minimum
Insulation	PTFE	
Body	Brass	Tri-Metal
Coupling Nut	Brass	Tri-Metal

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

N Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44522


URL: https://www.pasternack.com/n-male-standard-pe-c400-0.400-connector-pe44522-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

PE44522 CAD Drawing

N Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

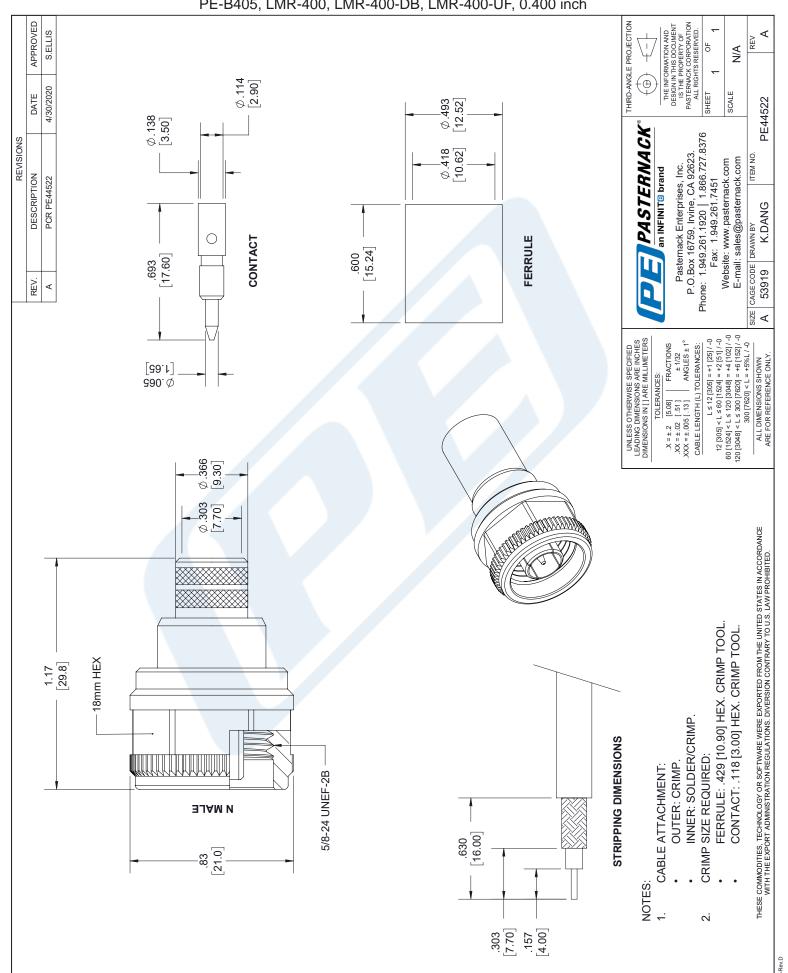





LMR-LW400 Light weight version of the 400 series Low Loss Coax

RF Cables Technical Data Sheet



Times Microwave Systems Coax Cable Specification Configuration

- · Low Loss, Outdoor Flexible Cable
- 2 Shield(s)

Features

- · Light Weight Coax with Aluminum Shielding
- · Max Operating Frequency of 8 GHz
- Phase Velocity 84% VoP

- Max Operating Temperature +85°C
- PE Jacket
- Min Install Bend Radius of 1 inches

Applications

- Antenna Installs
- RF Test Systems

- General Purpose RF Interconnect
- Laboratory Applications

Description

LMR-LW400 Light weight version of the 400 series Low Loss Coax from Times Microwave is part of the large product offering by Pasternack of radio frequency coaxial cable types specifically stocked to be ready for same-day shipment. Pasternack LMR-LW400 coax cable is manufactured in a flexible design and has a 50 Ohm impedance. This low loss and light weight flexible 50 Ohm coax cable LMR-LW400 is constructed with a 0.405 inch diameter and Black PE jacket.

LMR-LW400 flexible 50 Ohm coax cable with PE jacket is rated for a 8 GHz maximum operating frequency. This 50 Ohm 0.405 inch diameter and low loss flexible coax cable is built with an aluminum double shield count and RF shielding of 90 dB. Times Microwave LMR-LW400 PE coax is constructed with Foam PE dielectric and a maximum operating temperature of 85 degrees C. Pasternack's offering of LMR-LW400 coax cable provides specs for this wire on its RF coax cable LMR-LW400 datasheet.

LMR-LW400 cable is part of more than one million RF, microwave parts in stock at Pasternack. This Times Microwave low loss and light weight LMR-LW400 coax cable is ready to buy and can be shipped worldwide. Pasternack also maintains a wide selection of other radio frequency coaxial cable types that ship same-day from our warehouse as with the rest of our other RF/ microwave components.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
Impedance		50		Ohms
Velocity of Propagation		84		%
Time Delay		1.2 [3.94]		ns/ft [ns/m]
Shielding Effectiveness	90			dB
Dielectric Withstanding Voltage (DC)			2,500	Vdc
Jacket Spark			8,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: LMR-LW400 Light weight version of the 400 series Low Loss Coax LMR-LW400

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

^{*} LMR™ is a trademark of Times Microwave Systems.





LMR-LW400 Light weight version of the 400 series Low Loss Coax

RF Cables Technical Data Sheet



Inner Conductor DC Resistance		1.39	Ohms/1000ft
Outer Conductor DC Resistance		6.1	Ohms/1000ft
Nominal Capacitance	23.9 [78.41]		pF/ft [pF/m]
Nominal Inductance	0.06 [0.2]		uH/ft [uH/m]
Input Power (Peak)		16	kWatts

Performance by Frequency Band

	,					
Description	F1	F2	F3	F4	F5	Units
Frequency	0.05	0.15	0.45	0.9	1.5	GHz
Attenuation, Typ	0.9	1.5	2.7	3.9	5.1	dB/100ft
	2.95	4.92	8.86	12.8	16.73	dB/100m
Input Power (CW), Max	2,570	1,470	830	580	440	Watts
Description	F6	F7	F8	F9	F10	Units
Frequency	1.8	2	2.5	5.8	8	GHz
Attenuation, Typ	5.7	6	6.8	10.8	13	dB/100ft
	18.7	19.69	22.31	35.43	42.65	dB/100m
Input Power (CW), Max	400	370	330	210	170	Watts

Mechanical Specifications

Diameter 0.405 in [10.29 mm] 0.05 lbs/ft [0.07 kg/m] Weight

Min. Bend Radius (Installation) 1 in [25.4 mm] Min. Bend Radius (Repeated) 4 in [101.6 mm] **Bending Moment** 0.5 lbs-ft [0.68 N-m] 160 lbs [72.57 kg] Tensile Strength Flat Plate Crush 40 lbs/in [0.71 kg/mm]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper, 1 Strand	0.108 in [2.74 mm]
Conductor Type	Solid	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: LMR-LW400 Light weight version of the 400 series Low Loss Coax LMR-LW400

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





LMR-LW400 Light weight version of the 400 series Low Loss Coax

RF Cables Technical Data Sheet



Dielectric	Foam PE	0.285 in [7.24 mm]
First Shield	Aluminum Tape	[]
Second Shield	Aluminium	[]
Jacket	PE, Black	0.405 in [10.29 mm]

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C -40 to +85 deg C Installation Range -70 to +85 deg C Storage Range

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

LMR-LW400 Light weight version of the 400 series Low Loss Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: LMR-LW400 Light weight version of the 400 series Low Loss Coax LMR-LW400

URL: https://www.pasternack.com/low-loss-flexible-lmr-lw400-pe-jacket-aluminum-tape-over-aluminium-outer-conductordouble-shielded-Imr-lw400-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

