



Transfer Electromechanical Relay Latching Switch,
+COM, DC to 26.5 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data Sheet

PE71S6586

Features

- Transfer Electromechanical Relay Switch
- DC to 26.5 GHz Frequency Range
- Latching Actuator
- Positive Common (+COM) Configuration
- 5M Lifecycle Rating
- Insertion Loss 0.4 dB typ
- Isolation > 80 dB typ
- VSWR as low as 1.2:1 max
- Solder Terminal Pins for DC Control
- 28 Volt DC Bias
- SMA Female Connectors
- -25°C to +65°C Operating Temperature
- 90 Watt Average Power Handling
- 50 Ohm Design
- Hot Switching Capability - Consult Factory
- S-Parameter Data available upon request
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- SATCOM
- Wireless Communications
- Enterprise
- IoT

Description

The PE71S6586 is a Transfer electromechanical relay switch that operates across a broadband frequency range from DC to 26.5 GHz and can handle 90W of average power in a break before make condition. The 50 Ohm design supports a positive common (+COM) biasing configuration and features a Latching Actuator with a 5 million lifecycle rating. The Latching Actuator magnetically latches in place after the control voltage is removed. For power sensitive applications, this is the best actuator option. Impressive typical performance includes 0.4 dB insertion loss and isolation greater than 80 dB. This switch requires 28 Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports SMA female connectors and solder terminal pins for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications (TA = 25°C, DC Voltage = 28 Vdc)

Switch Type Actuator Type	Transfer Latching			
Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
Operating Voltage	26	28	30	Volts
Actuating Set Current @		250		mA
VSWR		1.2:1	1.6:1	
Insertion Loss		0.4	0.8	dB
Isolation	60	80		dB
Switching Time		<20		ms Typ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA PE71S6586](#)



Transfer Electromechanical Relay Latching Switch,
+COM, DC to 26.5 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6586

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12	12 to 18	18 to 26.5		GHz
VSWR, Max	1.2:1	1.3:1	1.4:1	1.6:1		
Insertion Loss, Max	0.2	0.3	0.5	0.8		dB
Isolation, Min	80	70	65	60		dB

Mechanical Specifications

Size

Length	2.05 in [52.07 mm]
Width/Diameter	1.5 in [38.1 mm]
Height	0.52 in [13.21 mm]
Weight	0.114 lbs [51.71 g]

Connectors

RF Connector Type	SMA Female
Control Connector	Solder Terminals

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +100 deg C

Shock	MIL-STD-202 Method 213, Condition D, 500G (non oper)
Vibration	MIL-STD-202 Method 204, Condition D, 10G RMS (non oper)

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA PE71S6586](#)




Transfer Electromechanical Relay Latching Switch,
+COM, DC to 26.5 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6586

Typical Performance Data

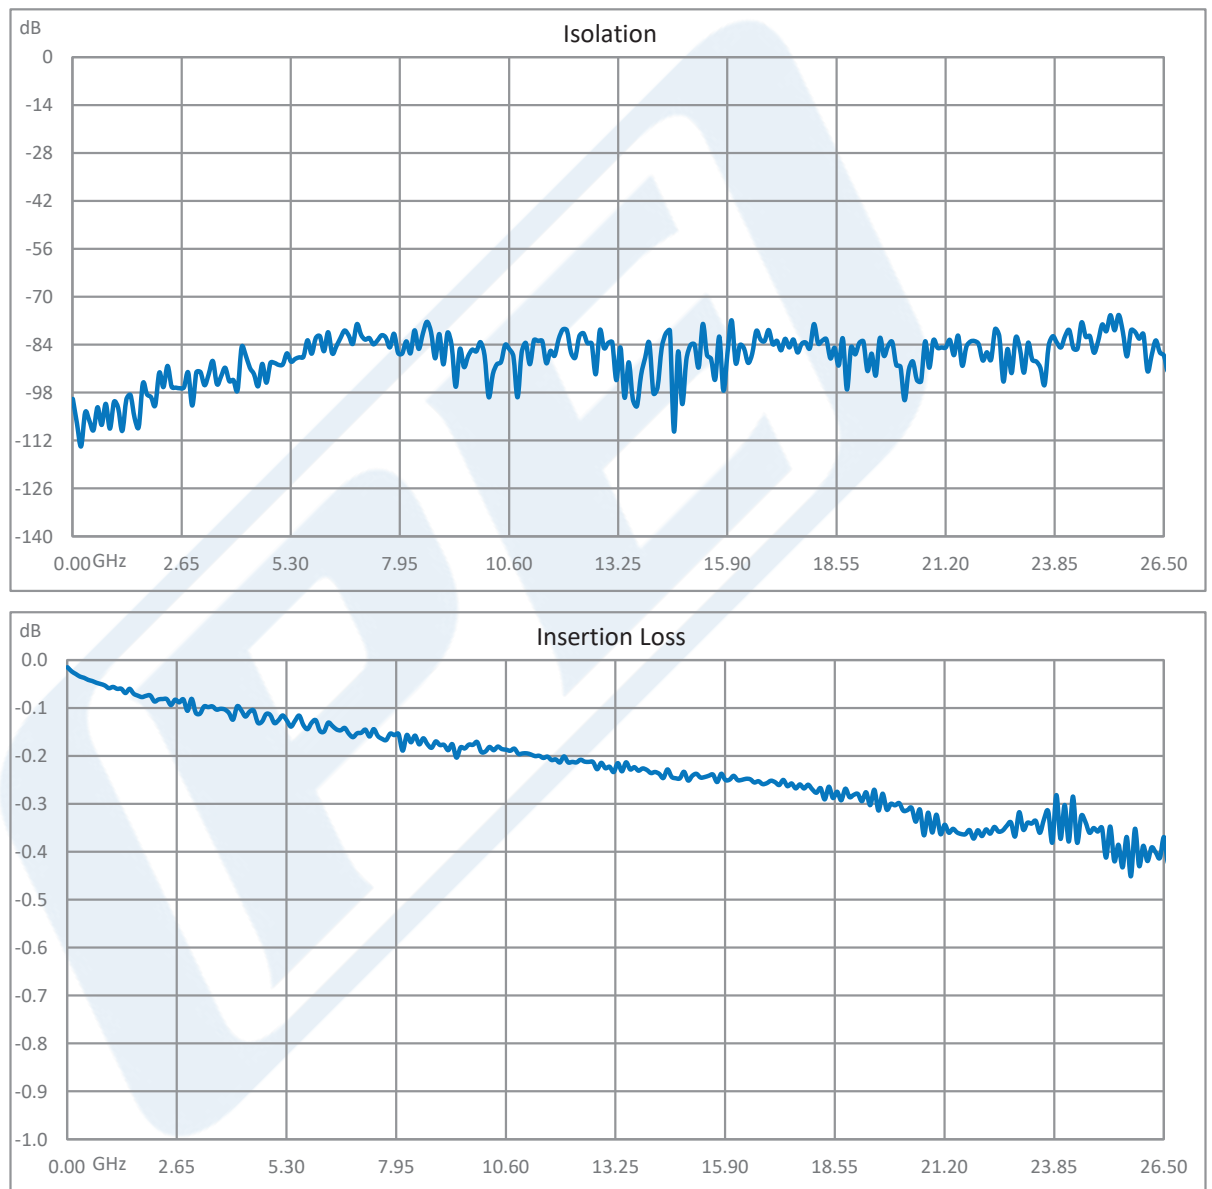


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA PE71S6586](#)



Transfer Electromechanical Relay Latching Switch,
+COM, DC to 26.5 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6586

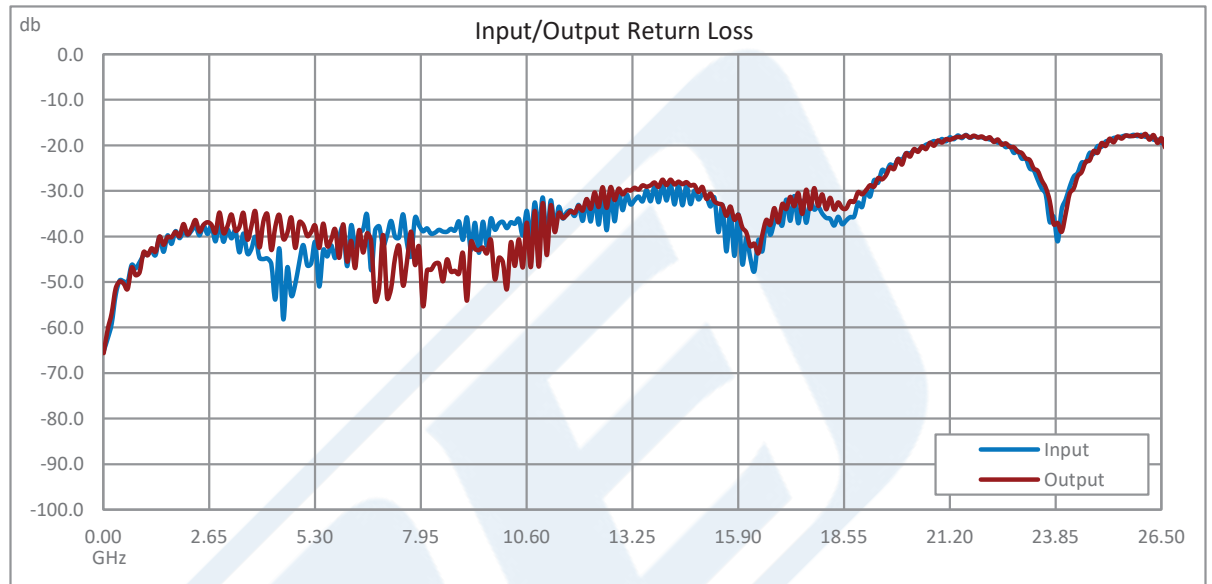

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA PE71S6586](#)




Transfer Electromechanical Relay Latching Switch,
+COM, DC to 26.5 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6586

Power Handling vs. Frequency

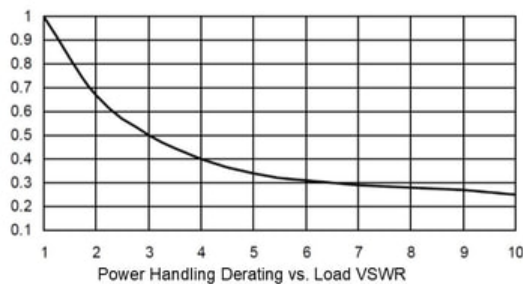

Power handling chart and derating curves based on the following conditions:

- Ambient temperature: 40°C or less
- Altitude: Sea level
- Load VSWR: 1.20:1 Maximum
- Relative Humidity: 40-50%
- Cold switching: RF signal off

Note: specifications subject to change without notice

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA PE71S6586](#)



Transfer Electromechanical Relay Latching Switch,
+COM, DC to 26.5 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6586

Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA PE71S6586](https://www.pasternack.com/transfer-electromechanical-relay-latching-switch-26.5-ghz-28v-sma-pe71s6586-p.aspx)

URL: <https://www.pasternack.com/transfer-electromechanical-relay-latching-switch-26.5-ghz-28v-sma-pe71s6586-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE71S6586 CAD Drawing

Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA



F E D C B A

F E D C B A

3X SOLDER TERMINALS,
SOLDER WIRE USING SN96,
MAXIMUM TEMP 250°C FOR
NO MORE THAN 5 SEC.

LABEL PER ILS-100-02
SEE NOTE 1

3X Ø.15 [3.8]
THRU HOLES

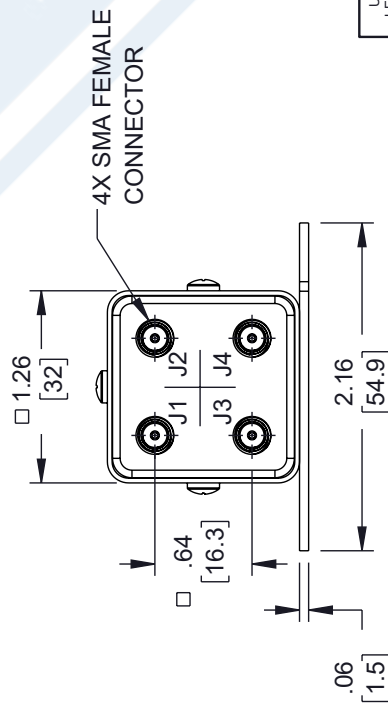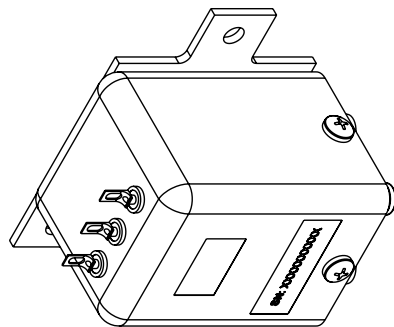

NOTES:

1. LABEL PER ILS-100-02. FOR INTERNAL REFERENCE ONLY.
LABEL LOCATION FOR REFERENCE ONLY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [.5] ±.132
.XXX = ±.005 [.13] ANGLES ± 1°
CABLE LENGTH TOLERANCES:
≤ 12 [305] = ±.1 [25] / -0
> 12 [305] ≤ 60 [1524] = ±.2 [51] / -0
> 60 [1524] ≤ 120 [3048] = ±.4 [102] / -0
> 120 [3048] ≤ 300 [7620] = ±.6 [152] / -0
> 300 [7620] = ±.6 [152] / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

PE PASTERNAK
an INFINIT® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

TRAN, SMA, LATCHING, +COM, 26.5GHz, 28VDC, SOLDER
TERMINAL




INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5
SCALE NONE
SHEET 1 OF 2

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	DMAY	PE71S6586	A

PE71S6586 CAD Drawing

Transfer Electromechanical Relay Latching Switch, +COM, DC to 26.5 GHz, 90W, 28VDC, SMA

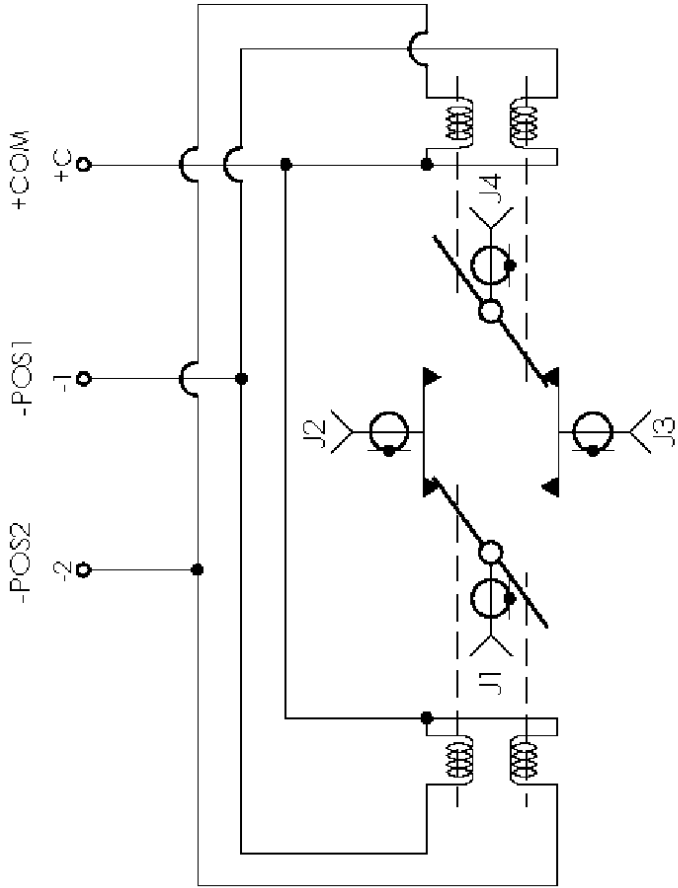

SCHEMATIC

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [.5] FRACTIONS
.XX = ±.02 [.5] ±.132
.XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION
TRAN, SMA, LATCHING, +COM, 26.5GHz, 28VDC, SOLDER
TERMINAL

SIZE A CASE CODE 53919 DRAWN BY DMAY ITEM NO. PE71S6586 REV A

INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 2 OF 2