



Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA

Phase Shifters and Trimmers Technical Data Sheet

PE82P2004

Features

- Analog Phase Shifter
- 2 GHz to 4 GHz
- Phase Shift 0° to 360° typ
- Insertion Loss 4 dB typ
- Phase Flatness +/- 10° typ
- P0.1dB +25 dBm typ
- Maximum RF Input Power +27 dBm
- 50 Ohm Design
- Single Positive Voltage Control 0 to +10Vdc
- Solder Pins for DC Control Voltage and Ground
- Field Replaceable Female SMA RF Connectors
- Operational Temperature Range -40°C to +85°C
- Rugged and Compact Aluminum Gold Plated Package Design
- Guaranteed Environmental Test Conditions Altitude, Vibration, Humidity, Shock
- Single DC Control Operation
- Low Phase Error

Applications

- Test & Measurement
- Military & Commercial
- Communications
- Military Electronic Systems
- Research & Development

Description

The PE82P2004 is an Analog Phase Shifter module that operates across a broadband frequency from 2 GHz to 4 GHz and supports a single positive voltage control of 0 to +10V dc. The design offers a continuously variable monotonic phase shift response that ranges from 0° to 360° while maintaining consistent insertion loss versus phase shift characteristics. The 50 Ohm design exhibits impressive typical performance which includes 4 dB insertion loss, +/-10° phase error, a 0.1 dB compression point (P0.1dB) of +25 dBm, and a maximum RF input power level of +27 dBm. The low profile pin package is aluminum with gold plating and supports field replaceable SMA RF connectors and solder pins for DC control. With the connectors removed, the package can be drop mounted onto a PWB. The module has an operational temperature range from -40°C to +85°C and is guaranteed to meet a series of environmental test conditions for Altitude, Vibration, Humidity, and Shock.

Electrical Specifications (Values at +25° C, Sea Level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		4	GHz
Impedance		50		Ohms
Phase Shift		360		Degrees
Control Voltage	0	10		Volts
Input VSWR		2:1	2.8:1	
Insertion Loss*		4	5.5	dB
Phase Error		±10	±15	Degrees
IL Temperature Coefficient		0.1		dB/deg C
0.1 dB Compression Power		25		dBm
DC Current			5	mA
Input Power, CW			27	dBm

*at 0V DC Control

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)



Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA

Phase Shifters and Trimmers Technical Data Sheet

PE82P2004

Absolute Maximum Rating

Parameter	Rating
Control Voltage	0V to +15V
RF Input power	+27dBm

Mechanical Specifications

Size

Length	0.787 in [19.99 mm]
Width/Diameter	0.551 in [14 mm]
Height	0.374 in [9.5 mm]
Weight	0.02 lbs [9.07 g]
Body Material and Plating	Aluminum, Gold

Configuration

Input Connector	SMA Female
Input Connector Specification	Field Replaceable
Output Connector	SMA Female
Output Connector Specification	Field Replaceable

Environmental Specifications

Temperature

Operating Range	-40 to 85 deg C
Storage Range	-50 to 105 deg C

Humidity	100% RH at 35°C, 95% RH at 40°C
Shock	20G for 11 msec half sine wave, 3 axis both directions
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Altitude	30,000 Feet

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)

Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA




Phase Shifters and Trimmers Technical Data Sheet


PE82P2004

Typical Performance Data


Insertion Loss @ +25°C

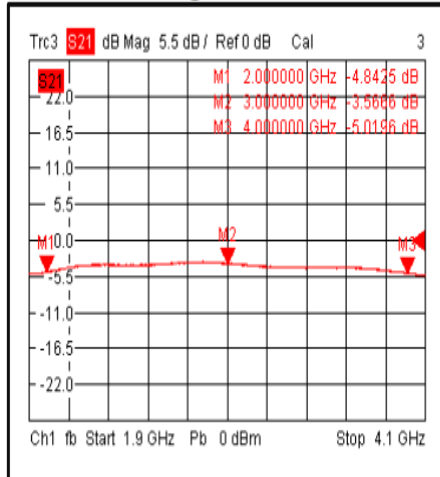


Input VSWR @ +25°C

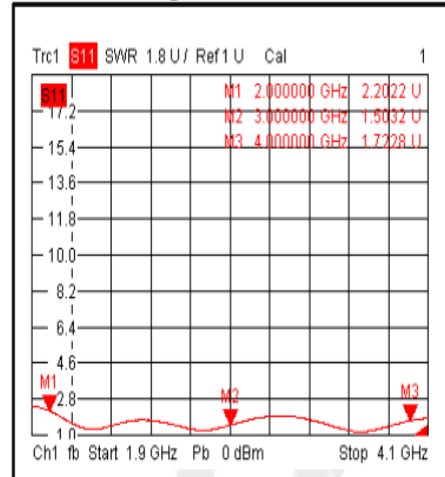

Output VSWR @ +25°C

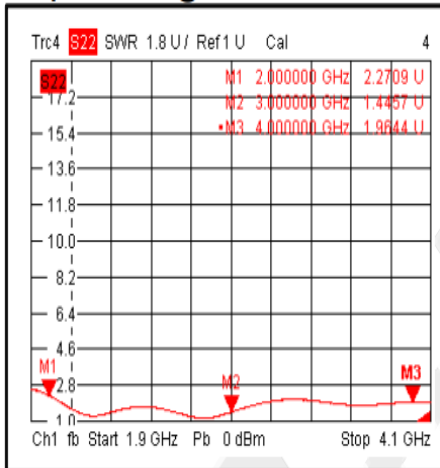

Insertion Loss @ -40°C

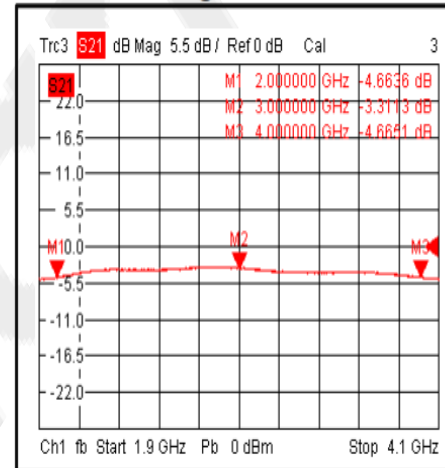

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)


Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA




Phase Shifters and Trimmers Technical Data Sheet

PE82P2004


Input VSWR @ -40°C

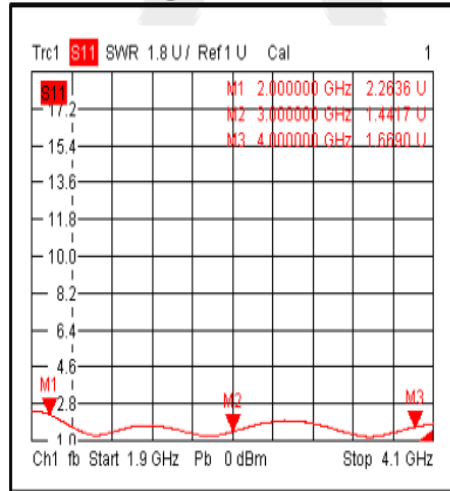


Output VSWR @ -40°C

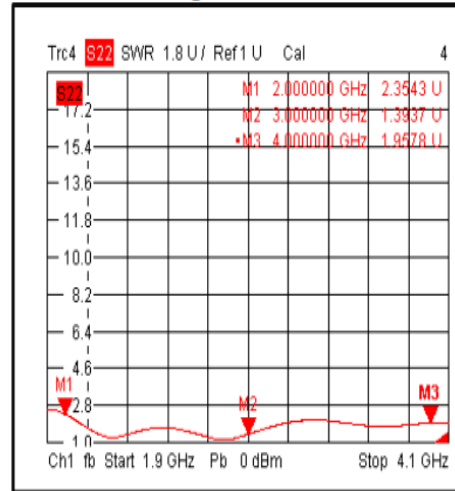

Insertion Loss @ +85°C

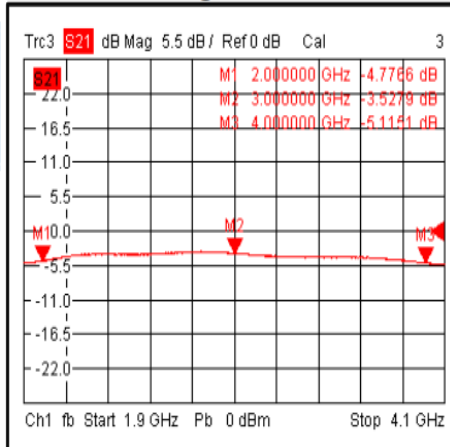

Input VSWR @ +85°C

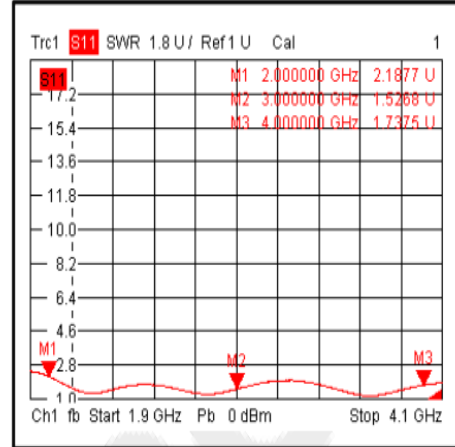

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)




Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA


Phase Shifters and Trimmers Technical Data Sheet

PE82P2004


Output VSWR @ +85°C

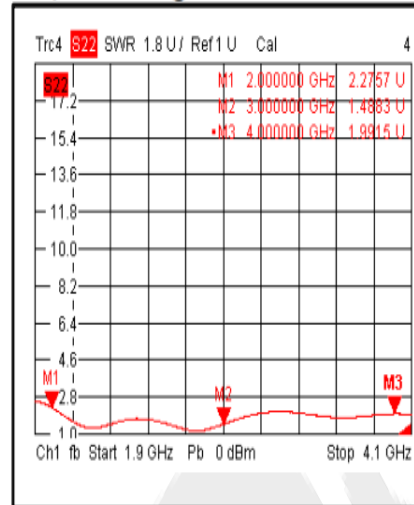


Insertion Loss vs. Frequency

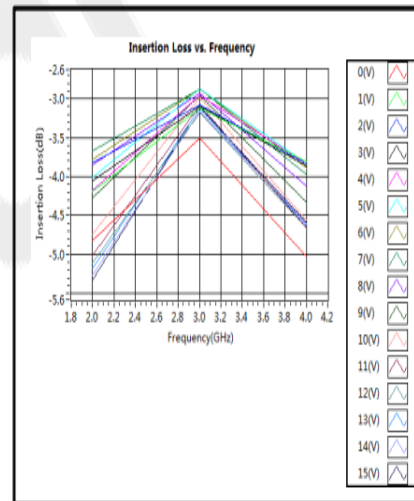

Input VSWR vs. Voltage (S11)

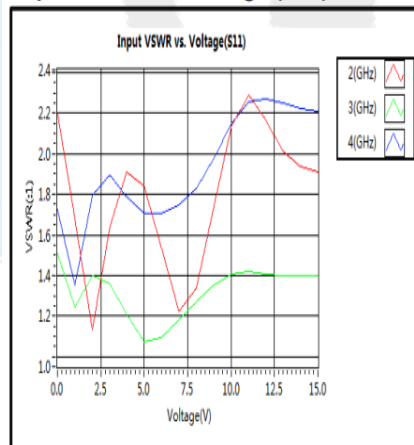

Output VSWR vs. Voltage (S22)

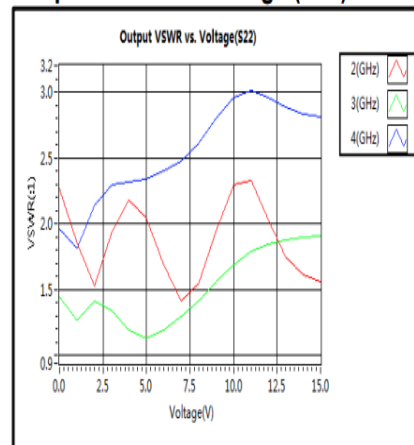

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)


Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA




Phase Shifters and Trimmers Technical Data Sheet

PE82P2004


Normalized Attenuation vs. Frequency

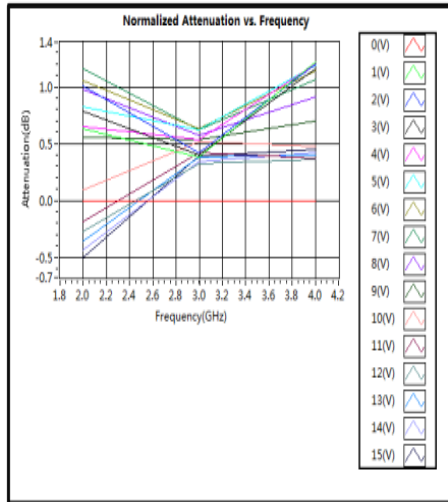


Phase Shift vs. Frequency

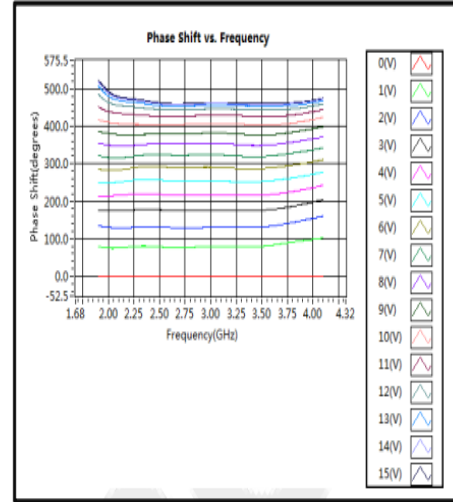

Phase Shift vs. Voltage

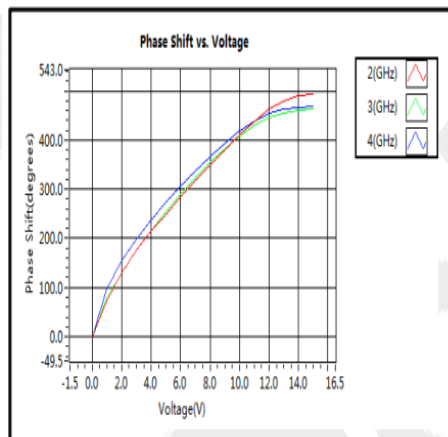

IIP3

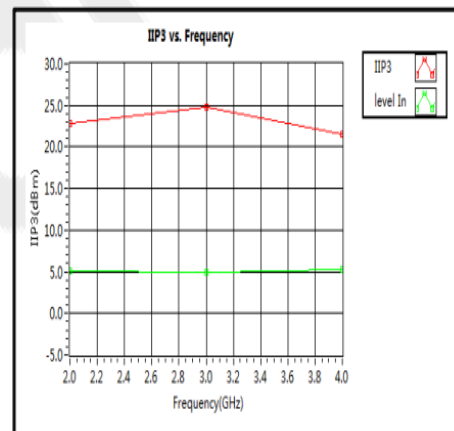

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)


Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA




Phase Shifters and Trimmers Technical Data Sheet

PE82P2004

Speed

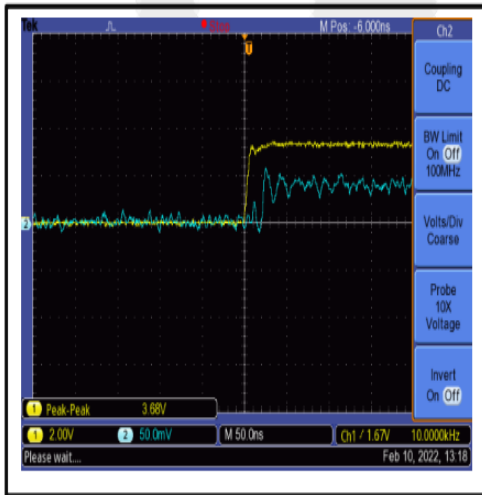

Speed

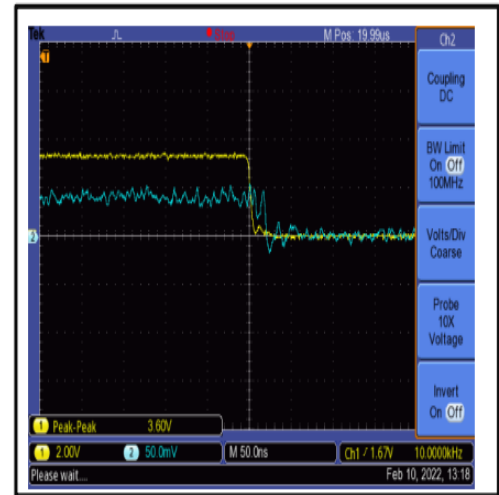



Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA PE82P2004](#)

URL: <https://www.pasternack.com/analog-phase-shifter-4-ghz-0-360-degrees-sma-pe82p2004-p.aspx>

PE82P2004 CAD Drawing

Analog Phase Shifter, 2 GHz to 4 GHz, 360 degree Phase Range,
0V to +10V Control Voltage, Max Pin +27 dBm, SMA

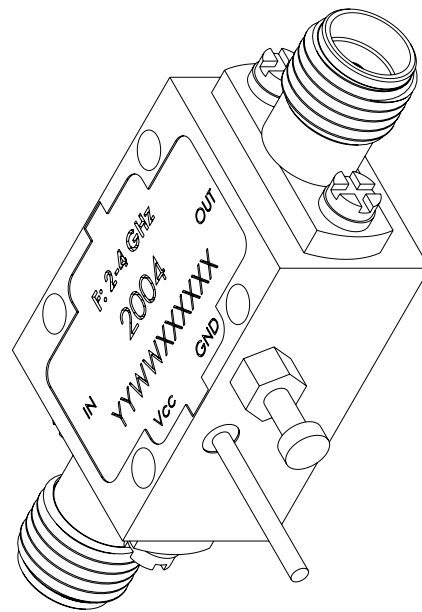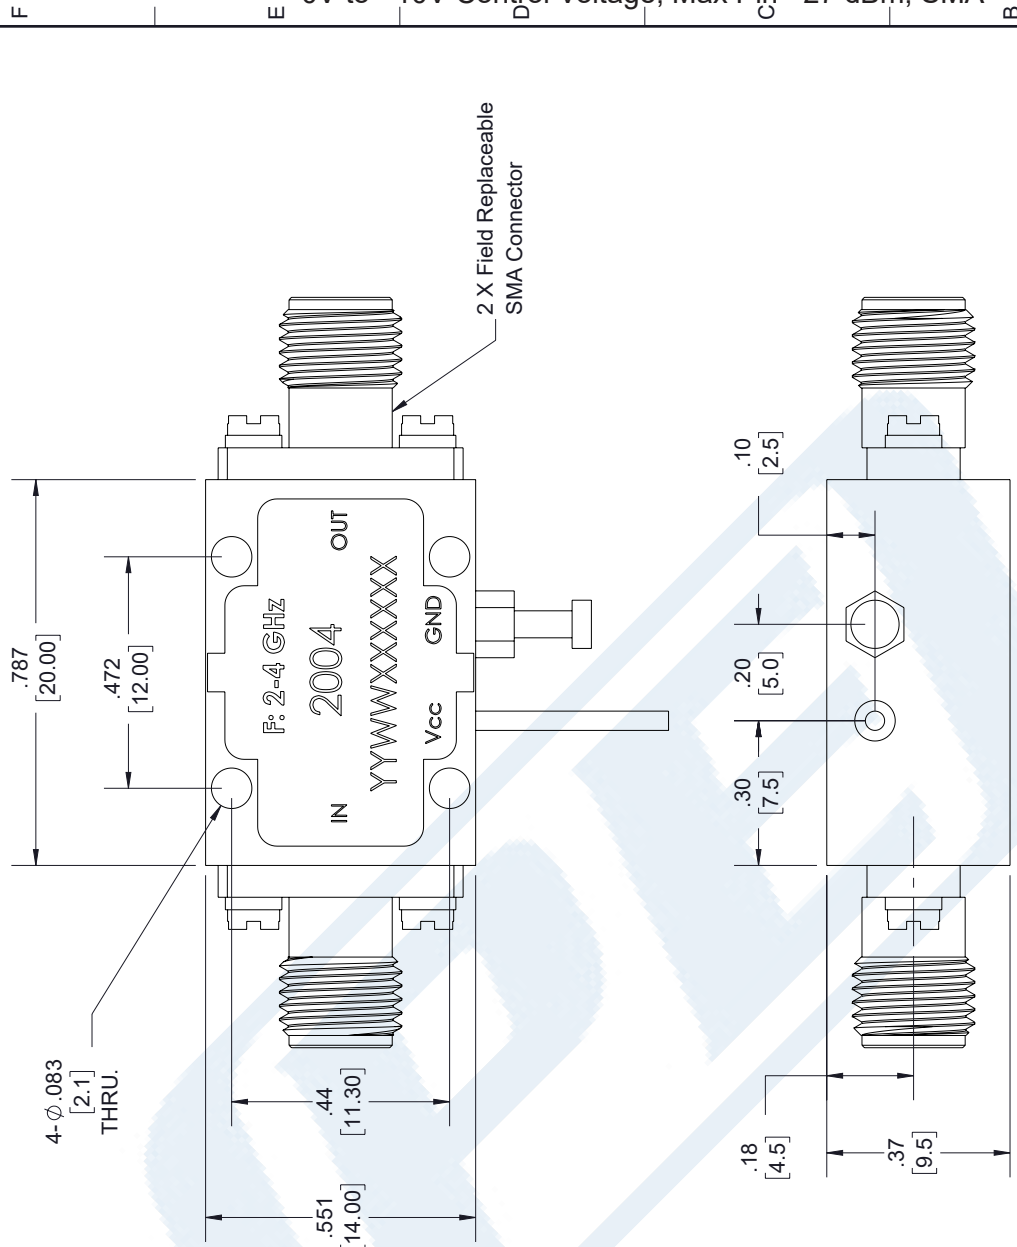

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ± .2 [5] FRACTIONS
.XX = ± .02 [.5] ± 1/32
.XXX = ± .005 [.13] ANGLES ± 1°
CABLE LENGTH TOLERANCES:
≤ 12 [305] = ± 1 [25] / -0
> 12 [305] ≤ 60 [1524] = ± 2 [51] / -0
> 60 [1524] ≤ 120 [3048] = ± 4 [102] / -0
> 120 [3048] ≤ 300 [7620] = ± 6 [152] / -0
> 300 [7620] = ± 5% / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

PE PASTERNAK
an INFINITI9 brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

2 GHz to 4, GHz 360° Voltage Controlled Phase Shifter, SMA

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev 02