

Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA

Phase Shifters and Trimmers Technical Data Sheet

PE82P2006

Features

- Analog Phase Shifter
- 18 GHz to 26 GHz
- Phase Shift 0° to 360° typ
- Insertion Loss 11 dB typ
- Phase Flatness +/- 5° typ
- P0.1dB +23 dBm typ
- Maximum RF Input Power +26 dBm
- 50 Ohm Design
- Single Positive Voltage Control 0 to +13Vdc
- Solder Pins for DC Control Voltage and Ground
- Field Replaceable Female SMA RF Connectors
- Operational Temperature Range -40°C to +85°C
- Rugged and Compact Aluminum Gold Plated Package Design
- Guaranteed Environmental Test Conditions Altitude, Vibration, Humidity, Shock
- Single DC Control Operation

Applications

- Test & Measurement
- Military & Commercial
- Communications
- Military Electronic Systems
- Research & Development

Description


The PE82P2006 is an Analog Phase Shifter module that operates across a broadband frequency from 18 GHz to 26 GHz and supports a single positive voltage control of 0 to +13Vdc. The design offers a continuously variable monotonic phase shift response that ranges from 0° to 360° while maintaining consistent insertion loss versus phase shift characteristics. The 50 Ohm design exhibits impressive typical performance which includes 11 dB insertion loss, +/-5° phase flatness, a 0.1 dB compression point (P0.1dB) of +23 dBm, and a maximum RF input power level of +26 dBm. The low profile pin package is aluminum with gold plating and supports field replaceable SMA RF connectors and solder pins for DC control. With the connectors removed, the package can be drop mounted onto a PWB. The module has an operational temperature range from -40°C to +85°C and is guaranteed to meet a series of environmental test conditions for Altitude, Vibration, Humidity, and Shock.

Electrical Specifications (Values at +25° C, Sea Level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	18		26	GHz
Impedance		50		Ohms
Phase Shift		360		Degrees
Control Voltage	0	13		Volts
Input VSWR		2.5:1	3.5:1	
Insertion Loss*		11	15	dB
Phase Flatness		±5	±25	Degrees
IL Temperature Coefficient		0.008		dB/deg C
0.1 dB Compression Power		23		dBm
DC Current		5		mA
Input Power, CW			26	dBm

*at 0V DC Control

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](#)



Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA

Phase Shifters and Trimmers Technical Data Sheet

PE82P2006

Absolute Maximum Rating

Parameter	Rating
Control Voltage	0V to +15V
RF Input power	+26dBm

Mechanical Specifications

Size

Length	0.8 in [20.32 mm]
Width/Diameter	0.56 in [14.22 mm]
Height	0.38 in [9.65 mm]
Weight	0.04 lbs [18.14 g]
Body Material and Plating	Aluminum, Gold

Configuration

Input Connector	SMA Female
Input Connector Specification	Field Replaceable
Output Connector	SMA Female
Output Connector Specification	Field Replaceable

Environmental Specifications

Temperature

Operating Range	-40 to 85 deg C
Storage Range	-50 to 105 deg C

Humidity	100% RH at 35°C, 95% RH at 40°C
Shock	20G for 11 msec half sine wave, 3 axis both directions
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Altitude	30,000 Feet

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](#)




Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA

Phase Shifters and Trimmers Technical Data Sheet


PE82P2006

Typical Performance Data


Insertion Loss @ +25°C

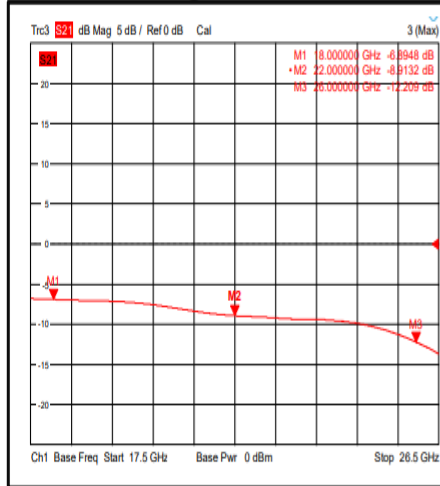


Input VSWR @ +25°C

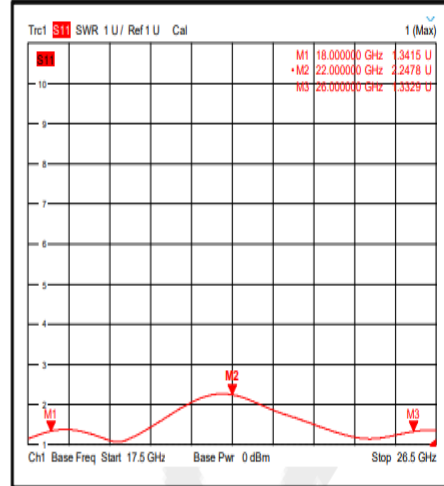

Output VSWR @ +25°C

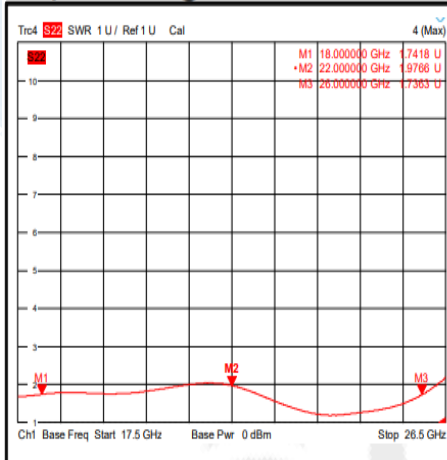

Insertion Loss @ -40°C

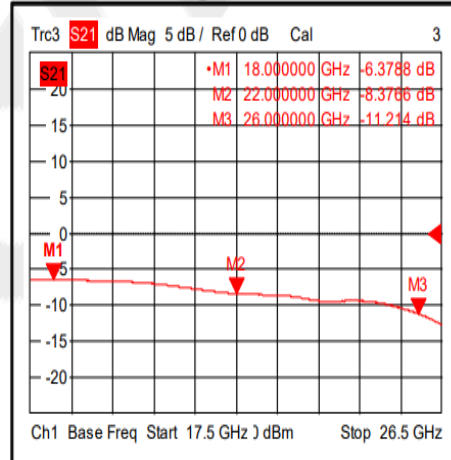

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](#)




Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA


Phase Shifters and Trimmers Technical Data Sheet

PE82P2006


Input VSWR @ -40°C

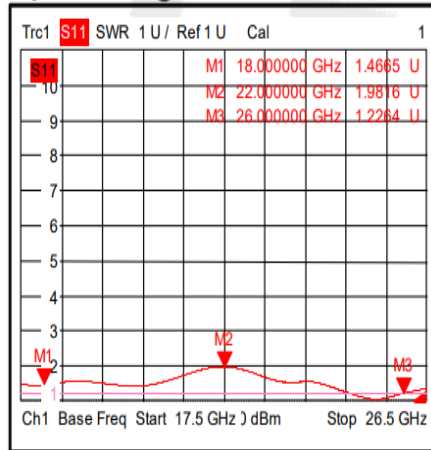


Output VSWR @ -40°C

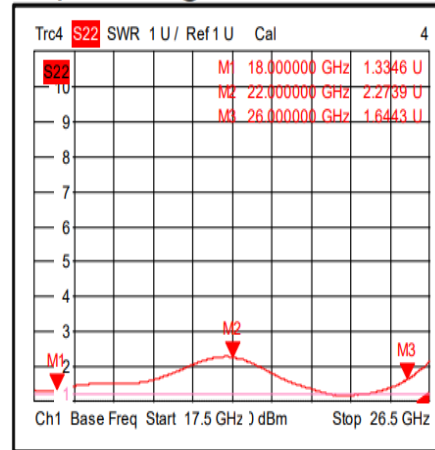

Insertion Loss @ +85°C

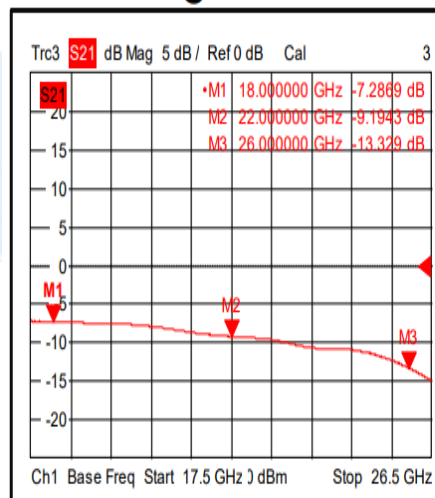

Input VSWR @ +85°C

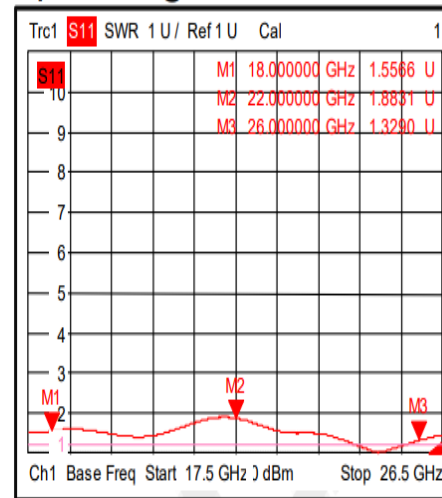

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](#)




Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA


Phase Shifters and Trimmers Technical Data Sheet

PE82P2006


Output VSWR @ +85°C

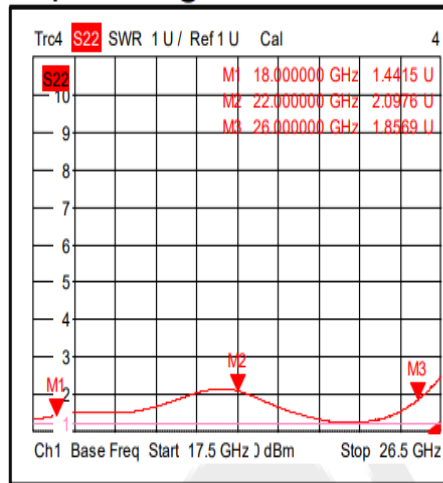


Insertion Loss vs. Frequency

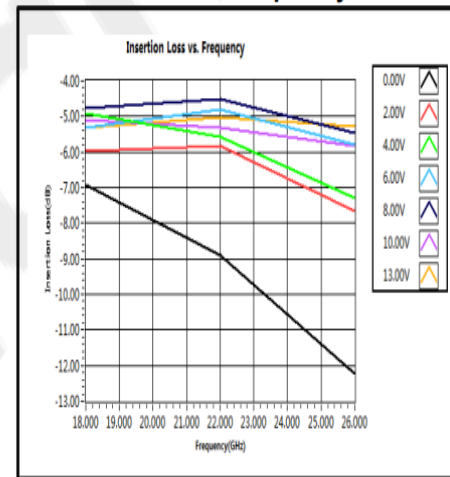

Input VSWR vs. Voltage

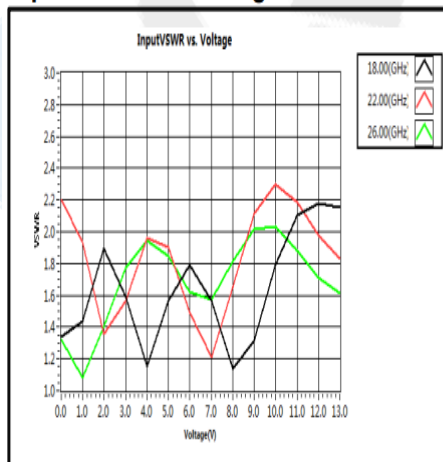

Output VSWR vs. Voltage

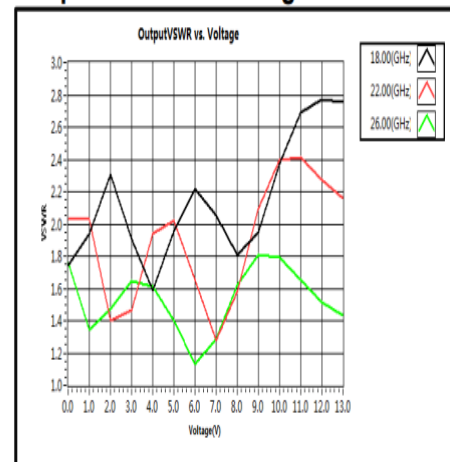

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](#)




Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA


Phase Shifters and Trimmers Technical Data Sheet

PE82P2006


Phase Shift vs. Frequency

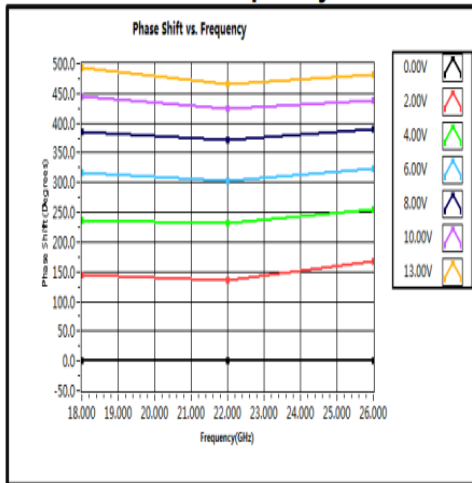

Phase Shift vs. Voltage

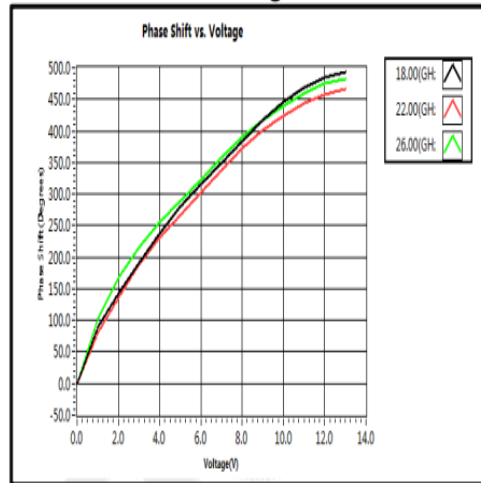

Attenuation vs. Frequency

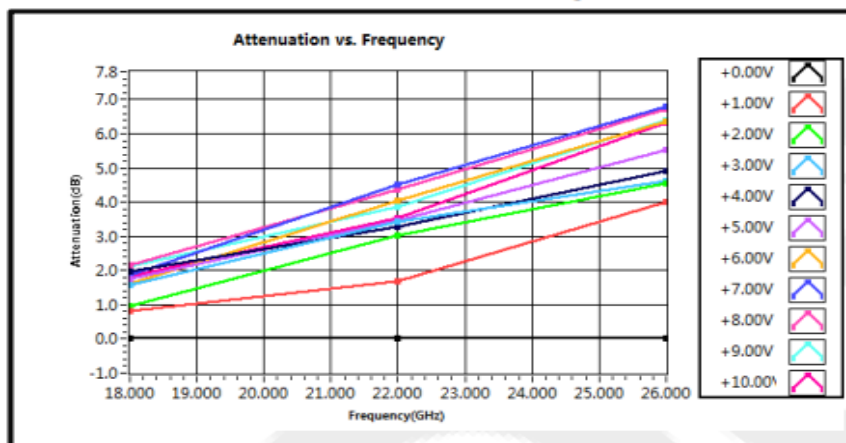

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](#)



Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA

Phase Shifters and Trimmers Technical Data Sheet

PE82P2006


Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 0V to +13V Control Voltage, Max Pin +26 dBm, SMA PE82P2006](https://www.pasternack.com/analog-phase-shifter-26-ghz-0-0-degrees-sma-pe82p2006-p.aspx)

URL: <https://www.pasternack.com/analog-phase-shifter-26-ghz-0-0-degrees-sma-pe82p2006-p.aspx>

PE82P2006 CAD Drawing

Analog Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range,
0V to +13V Control Voltage, Max Pin +26 dBm, SMA

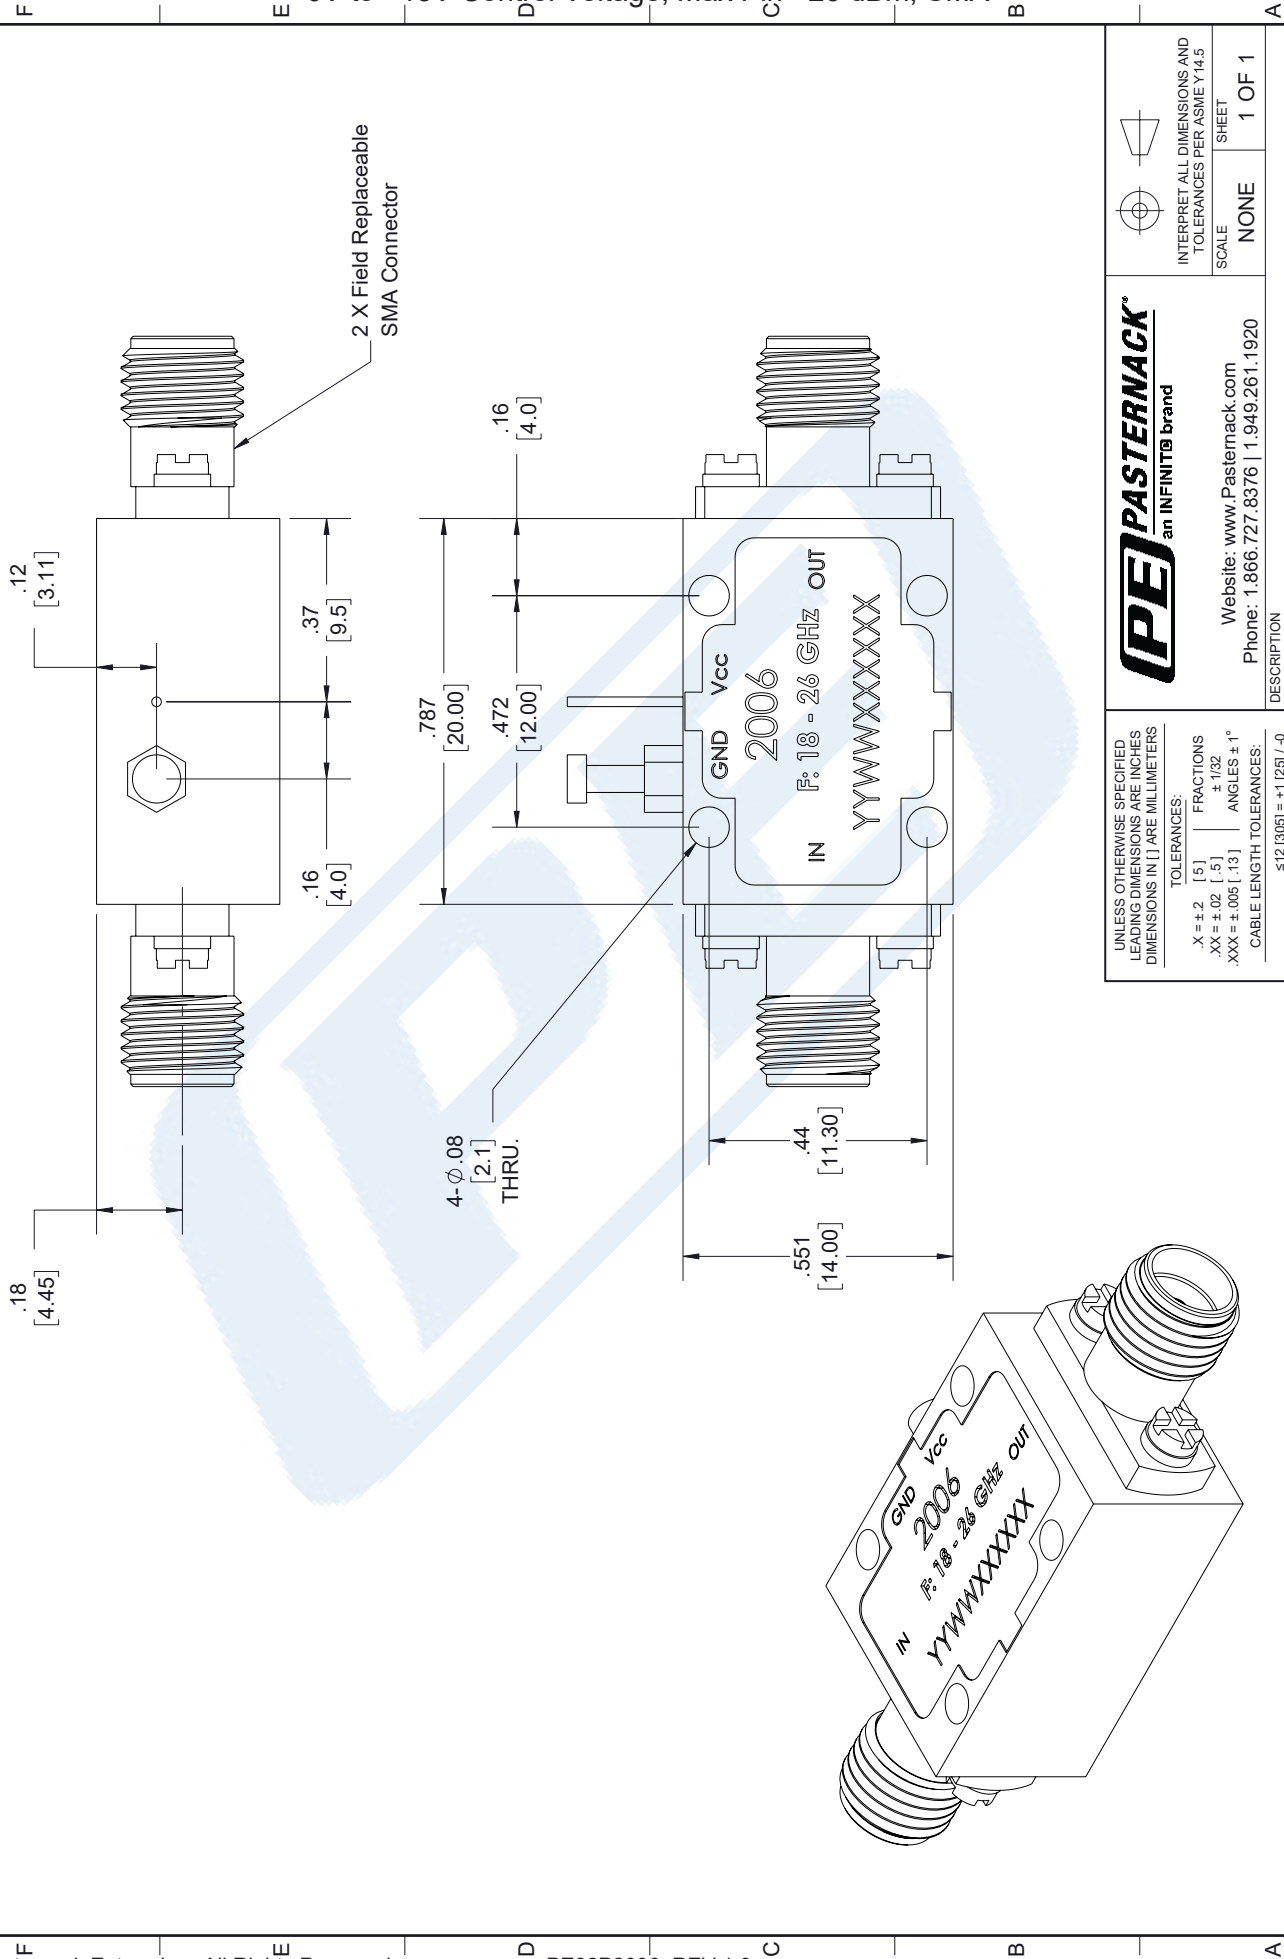

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	PE PASTERNAK an INFINITI[®] brand Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1
TOLERANCES: X = ±.2 [5] FRACTIONS XX = ±.02 [.5] ± 1/32 XXX = ±.005 [.13] ANGLES ± 1° CABLE LENGTH TOLERANCES: ≤12 [305] = ±1 [25] / -0 >12 [305] ≤ 60 [1524] = ±2 [51] / -0 >60 [1524] ≤ 120 [3048] = ±4 [102] / -0 >120 [3048] ≤ 300 [7620] = ±6 [152] / -0 >300 [7620] = ±5% / -0	DESCRIPTION 18 GHz to 26, GHz 360 ° Voltage Controlled Phase Shifter, SMA	SIZE: A CAGE CODE: 53919 DRAWN BY: PSRINIVAS ITEM NO.: PE82P2006
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	REV: A	REV: A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.