

WR-34 Waveguide 40 dB Broadwall Coupler, UG-1530/U Flange,
 2.92mm Female Coupled Port, 21.7 GHz to 33 GHz, Copper

Waveguide Couplers Technical Data Sheet

PEW34CP001-40

The PEW34CP001-40 is a WR-34 Directional Broadwall waveguide coupler with 2.92mm female coupled port that operates in the frequency range of 21.7 to 33 GHz. This Waveguide component has a maximum VSWR of 1.5:1. These designs are made of painted copper alloy and incorporate a broad wall configuration that result in a mid-band nominal coupling value of 10, 20, 30, 40 or 50 dB. Common applications for this component would be where power measurements are required within a system for measuring/sampling power or frequency monitoring with minimal signal loss to the main transmission line. Pasternack offers a complete family of waveguide Crossguide and Broadwall couplers that are in-stock and ship same day.

Features

- Three Port Broadwall Waveguide Coupler
- 40±0.7 dB Nominal Coupling Level
- Integrated 2.92mm Female Connector coupled port
- 21.7 GHz to 33 GHz Frequency Range
- Main Line VSWR < 1.1:1
- Max Power 150W (CW)

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements
- Source Leveling

Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	21.7		33	GHz
Coupler				
Nominal Coupling Level		40		dB
Directivity	25			dB
Insertion Loss			0.25	dB
Main Line VSWR			1.1:1	
Secondary Line VSWR			1.5:1	
Coupling Flatness			±0.7	dB
Input Power (CW)			150	Watts
Input Power, Peak			30	kWatts

Mechanical Specifications

Size

Length	5.51 in [139.95 mm]
Width	0.83 in [21.08 mm]
Height	0.83 in [21.08 mm]
Weight	0.215 lbs [97.52 g]
Flange Designation	UG-1530/U

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-34 Waveguide 40 dB Broadwall Coupler, UG-1530/U Flange, 2.92mm Female Coupled Port, 21.7 GHz to 33 GHz, Copper PEW34CP001-40](#)



WR-34 Waveguide 40 dB Broadwall Coupler, UG-1530/U Flange,
2.92mm Female Coupled Port, 21.7 GHz to 33 GHz, Copper

Waveguide Couplers Technical Data Sheet

PEW34CP001-40

Flange Material and Plating
RF Connector Type

Copper, Gold
2.92mm Female

Coupler Body Material and Plating

Copper, Gold

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

WR-34 Waveguide 40 dB Broadwall Coupler, UG-1530/U Flange, 2.92mm Female Coupled Port, 21.7 GHz to 33 GHz, Copper from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-34 Waveguide 40 dB Broadwall Coupler, UG-1530/U Flange, 2.92mm Female Coupled Port, 21.7 GHz to 33 GHz, Copper PEW34CP001-40](#)

URL: <https://www.pasternack.com/wr34-waveguide-40db-broadwall-coupler-ug1530-33mhz-pew34cp001-40-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEW34CP001-40 CAD Drawing

WR-34 Waveguide 40 dB Broadwall Coupler, UG-1530/U Flange,
2.92mm Female Coupled Port, 21.7 GHz to 33 GHz, Copper

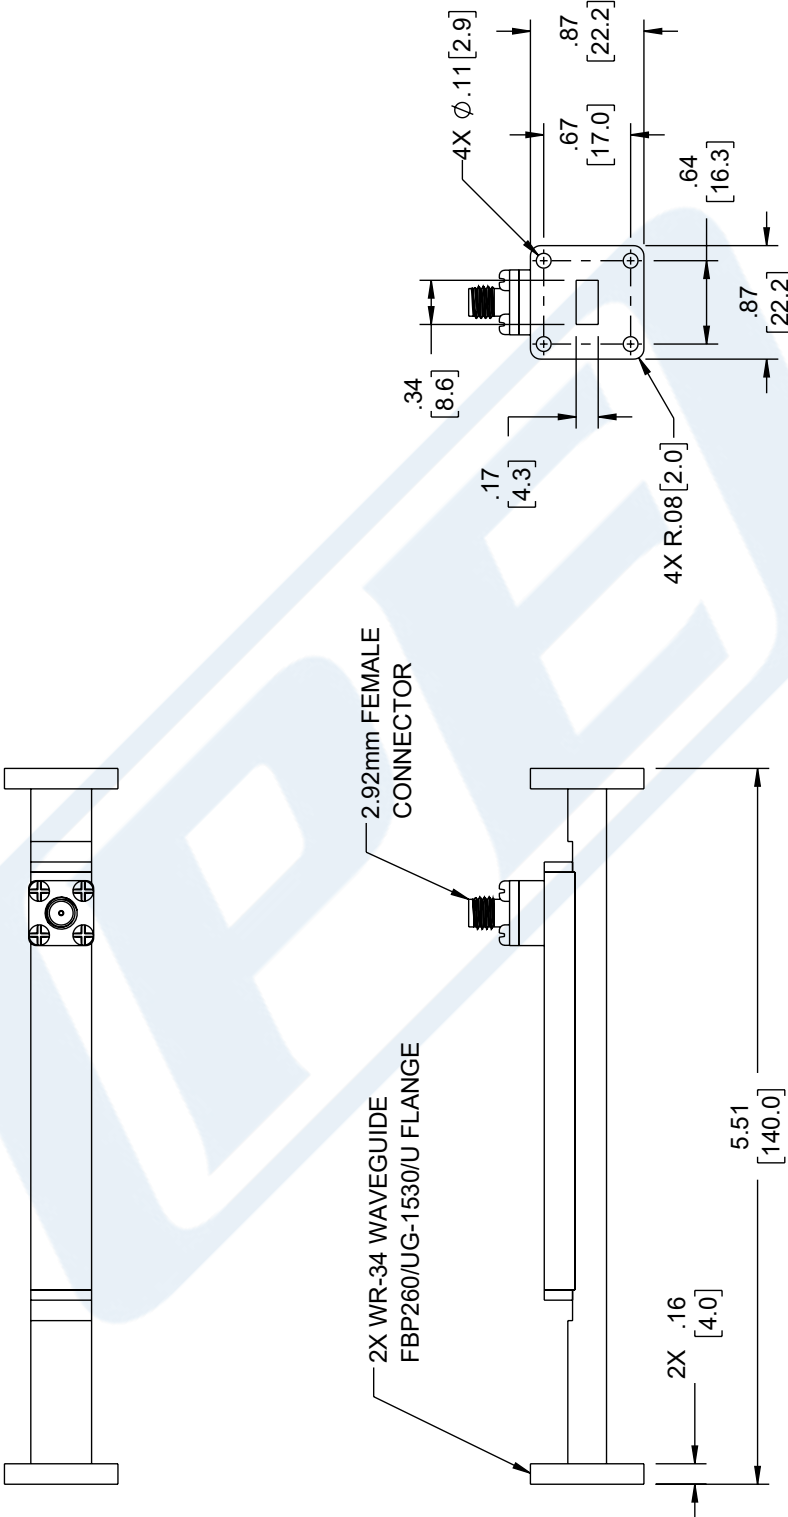



PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE

SHEET: 1 OF 1

DESCRIPTION: WR-34 Waveguide broadwall coupler, 40dB with 2.92mm female connector

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	HBAKKE	PEW34CP001-40

REV: A

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2	[.5]	FRACTIONS
.XX = ±.02	[.5]	±.1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤12 [305]	±.1 [25]	/ -0	
>12 [305]	±.15 [4]	/ -0	
>60 [1524]	±.120 [3048]	±.4 [102]	/ -0
>120 [3048]	±.300 [7620]	±.6 [152]	/ -0
>300 [7620]	±.5%	/ -0	

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.