



10 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Directional Rated To 100 Watts Up To 6 GHz

TECHNICAL DATA SHEET

PE7203-10

10 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Directional Rated To 100 Watts Up To 6 GHz

Pasternack Enterprises line of 100W Attenuators operate from DC to 6 GHz, and are available in 42 different 7/16 DIN, N, SMA and TNC in-series and between-series connector combinations. Our 100W Attenuators are manufactured with Passivated Stainless Steel SMA, TNC and N connectors, and Silver Plated Brass 7/16 DIN connectors. Pasternack 100W Attenuators come in 3 dB, 6 dB, 10 dB, 20 dB, 30 dB, 40 dB, 60 dB values and will operate from -55 to +125 degrees C. Additional connector combinations are available beyond the 42 standard designs, upon request.

- 100W average power and 2,000W peak power handling capability
- Operate to 6 GHz
- Temperature range of -55 to +125 degrees C
- 42 in-series and between series combinations
- 7/16 DIN, SMA, N, TNC Male and Female connectors are available
- Other connector combinations available upon request

Configuration

Design	Fixed, Directional Attenuator
Connector 1	7/16 DIN Male
Connector 2	7/16 DIN Female
Body Material and Plating	Aluminum Heatsink, Black Anodized

Electrical Specifications

Frequency Range, GHz	DC to 6
Impedance, Ohms	50
Attenuation Value, dB	10
Maximum Input Power, Watts	100
Maximum VSWR	1.45:1

Frequency 1

Range, GHz	DC to 2
VSWR	1.2:1
Attenuation Accuracy, dB	± 0.75

Frequency 2

Range, GHz	2 to 4
VSWR	1.35:1
Attenuation Accuracy, dB	± 1

Frequency 3

Range, GHz	4 to 6
VSWR	1.45:1
Attenuation Accuracy, dB	± 1.25

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +125
------------------------	-------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Directional Rated To 100 Watts Up To 6 GHz PE7203-10](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



10 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Directional Rated To 100 Watts Up To 6 GHz

TECHNICAL DATA SHEET

PE7203-10

Size

Length, in [mm]	4.9 [124.46]
Width, in [mm]	3.8 [96.52]
Height, in [mm]	2.7 [68.58]
Weight, lbs [Kg]	3 [1.36]

Connector 1

Type	7/16 DIN Male
Contact Material and Plating	Brass, Silver
Coupling Nut Material and Plating	Brass, Silver
Body Material and Plating	Brass, Silver

Connector 2

Type	7/16 DIN Female
Contact Material and Plating	Brass, Silver
Body Material and Plating	Brass, Silver

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes: Values at 25 °C, sea level

URL: <http://www.pasternack.com/10db-fixed-7-16-male-7-16-female-100-watts-attenuator-pe7203-10-p.aspx>

10 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Directional Rated To 100 Watts Up To 6 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


PE7203-10 CAD Drawing

10 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female

Directional Rated To 100 Watts Up To 6 GHz

xx	Input Connector	Output Connector	Part Number Configuration
01	7/16 Female	7/16 Male	
02	N Female	7/16 Male	
03	7/16 Male	7/16 Female	
04	7/16 Female	7/16 Female	
05	N Male	7/16 Female	
06	N Female	7/16 Female	
07	7/16 Female	N Male	
08	N Female	N Male	
09	SMA Female	N Male	
10	TNC Female	N Male	
11	7/16 Male	N Female	
12	7/16 Female	N Female	
13	N Male	N Female	
14	N Female	N Female	
15	SMA Male	N Female	
16	SMA Female	N Female	
17	TNC Male	N Female	
18	TNC Female	N Female	
19	7/16 Female	SMA Male	
20	N Female	SMA Male	
21	SMA Female	SMA Male	
22	TNC Female	SMA Male	
23	7/16 Male	SMA Female	
24	7/16 Female	SMA Female	
25	N Male	SMA Female	
26	N Female	SMA Female	
27	SMA Male	SMA Female	
28	SMA Female	SMA Female	
29	TNC Male	SMA Female	
30	TNC Female	SMA Female	
31	7/16 Female	TNC Male	
32	N Female	TNC Male	
33	SMA Female	TNC Male	
34	TNC Female	TNC Male	
35	7/16 Male	TNC Female	
36	7/16 Female	TNC Female	
37	N Male	TNC Female	
38	N Female	TNC Female	
39	SMA Male	TNC Female	
40	SMA Female	TNC Female	
41	TNC Male	TNC Female	
42	TNC Female	TNC Female	
-yy	Indicates Attenuation Level		

Table of Information		
Connector Type	DIM "A" (REF.)	
SMA Male	0.68	
SMA Female	0.54	
TNC Male	0.98	
TNC Female	0.94	
N Female	0.95	
N Male	0.98	
7/16 Male	1.12	
7/16 Female	1.16	

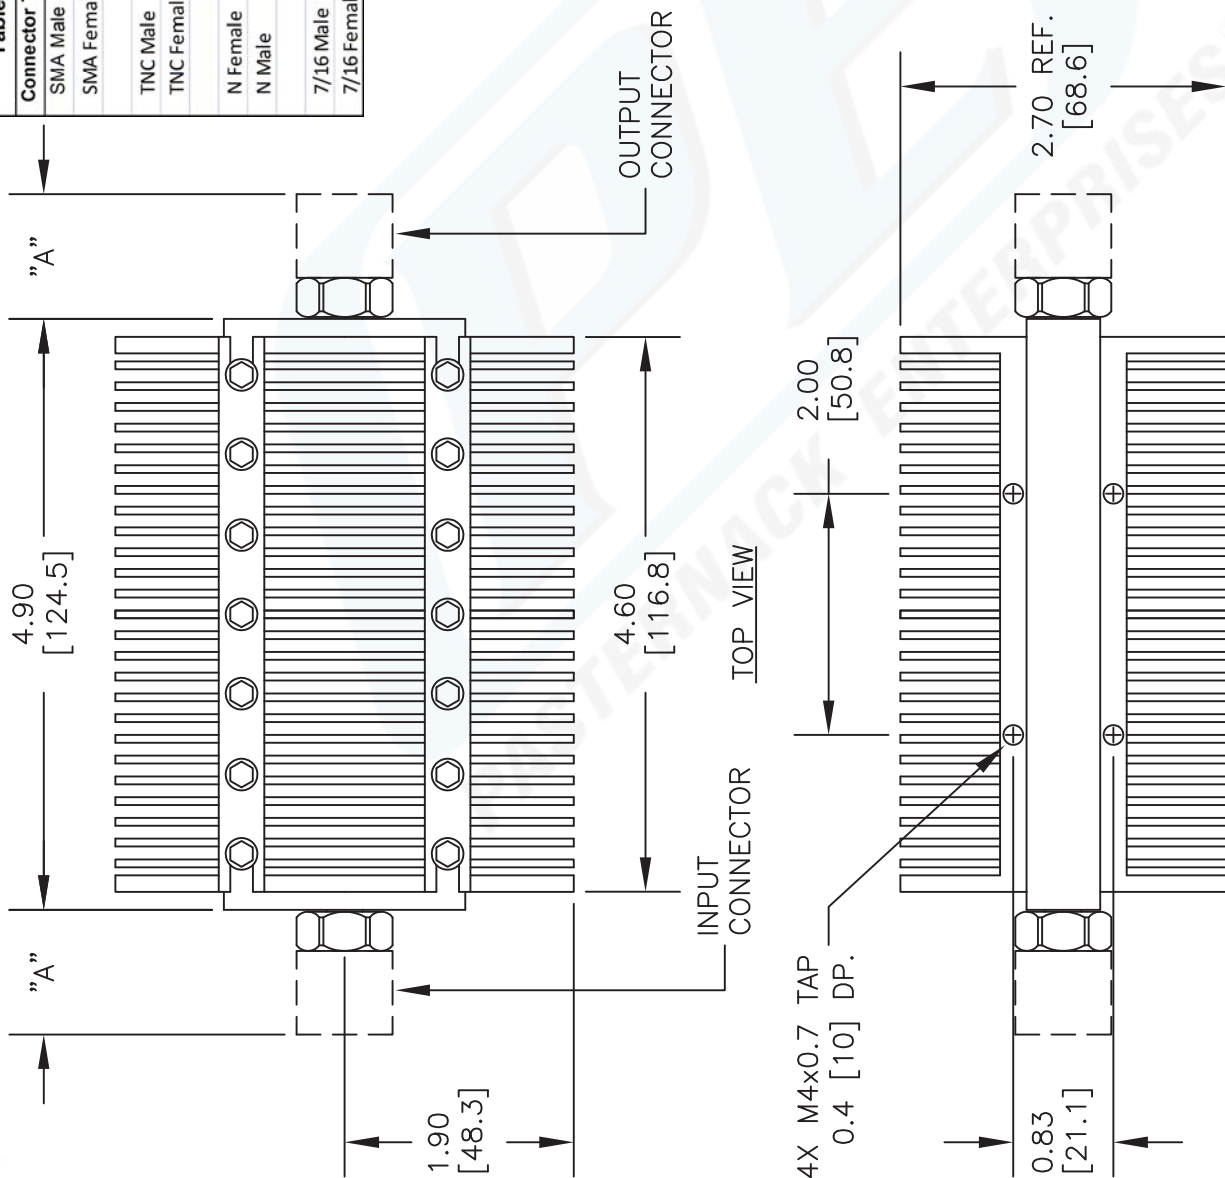

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE72xx-yy

FSCM NO. 53919

CAD FILE 091412

SCALE N/A

SIZE A

2233

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com