

WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm Male connector, with Pre-Installed L Mount



PE2WAN042-15KM

Features

- 18 GHz to 26.5 GHz
- WR-42 Waveguide Band
- 15 dBi Nominal Gain
- 2.92mm Male Connector
- Pre-Installed L Mount
- Integrates with Positioning Systems

Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio Systems
- Radome Testing
- Automotive Antenna Test Solutions
- Radar Cross Section
- Satellite Antenna Testing

Description

The PE2WAN042-15KM standard gain horn antenna with pre-installed L mount (also known as waveguide horn) from Pasternack is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-42 to 2.92mm male waveguide to coaxial adapter and operates from 18 GHz to 26.5 GHz.

Our PE2WAN042-15KM standard gain horn antenna with pre-installed L mount has a nominal gain of 15 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 31 dB and 32 dB respectively. Pasternack's 2.92mm male to WR-42 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the PE2WAN042-15KM are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-42 waveguide antennas with 2.92mm male interface is part of over 40,000 RF, microwave and millimeter wave components from Pasternack available worldwide and ship same day.

Configuration

Design	WR-42
Coaxial Interface	2.92mm Male


Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	18		26.5	GHz
Gain		15		
Horizontal Half Power Beam Width		31		Degrees
Vertical Half Power Beam Width		32		
Waveguide to Coaxial Adapter				
VSWR			1.4:1	

Mechanical Specifications

Size	
Length	7.967 in [202.36 mm]
Width	5.978 in [151.84 mm]
Height	4.092 in [103.94 mm]
Weight	0.7115 lbs [322.73 g]

WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm Male connector, with Pre-Installed L Mount



PE2WAN042-15KM

RF Connector

Type 2.92mm Male

Waveguide Interface


Waveguide Size WR-42

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:



Typical Performance Data

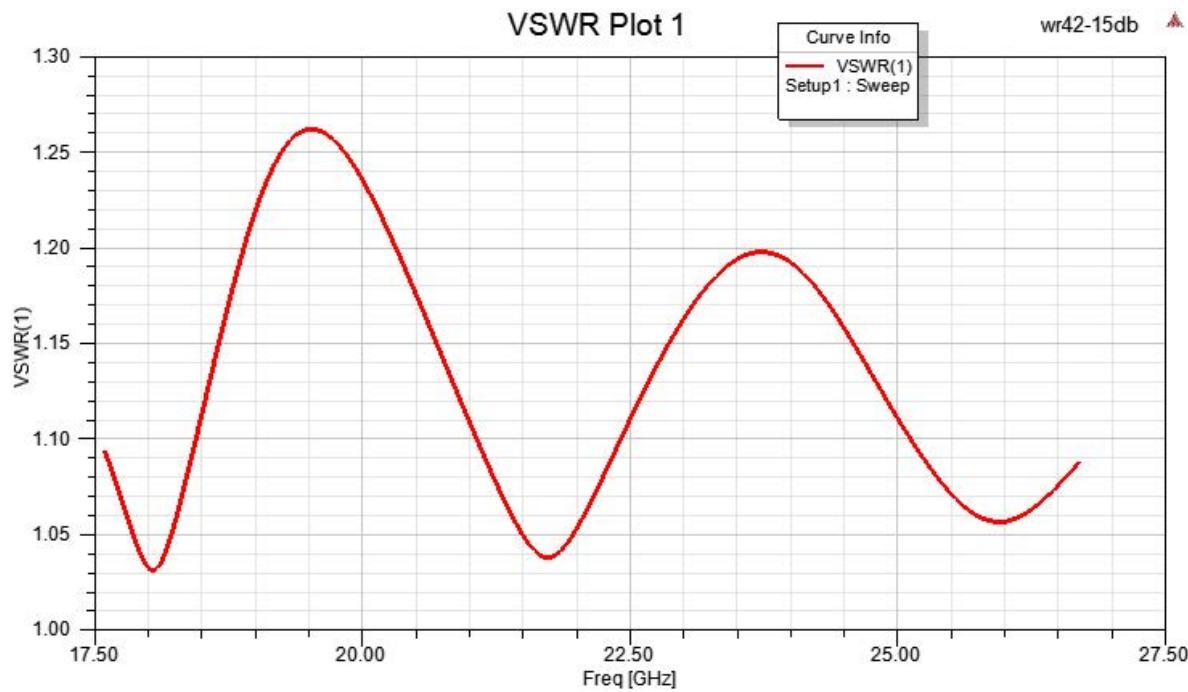


WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm
Male connector, with Pre-Installed L Mount




PE2WAN042-15KM

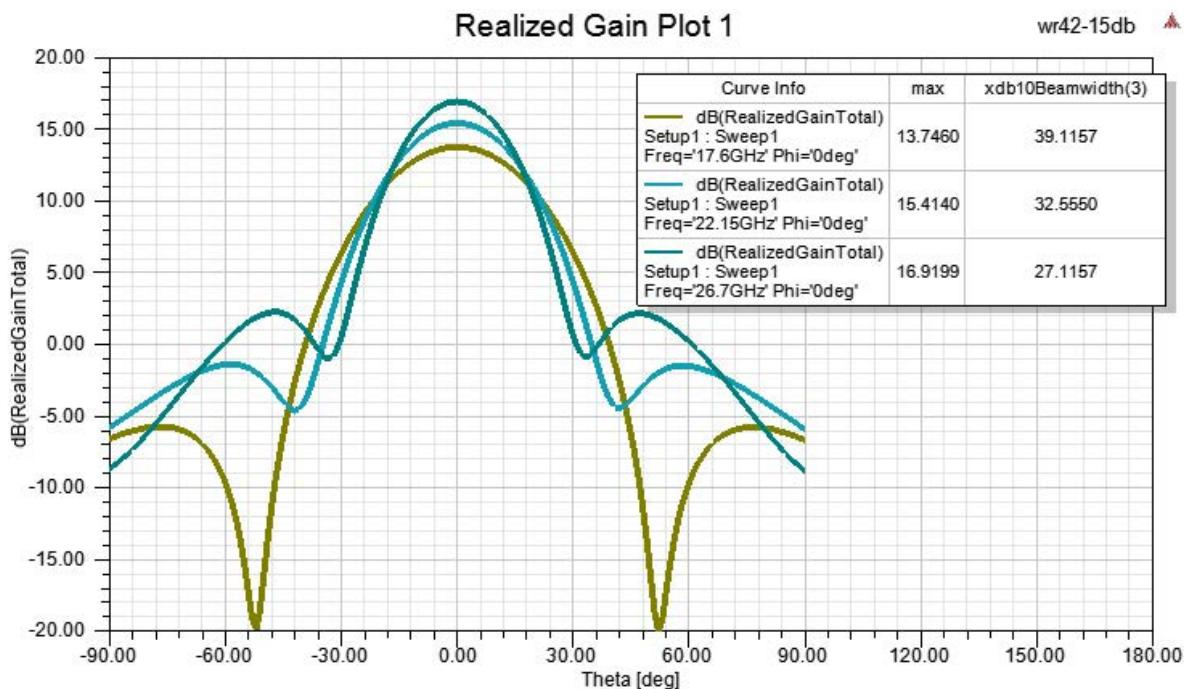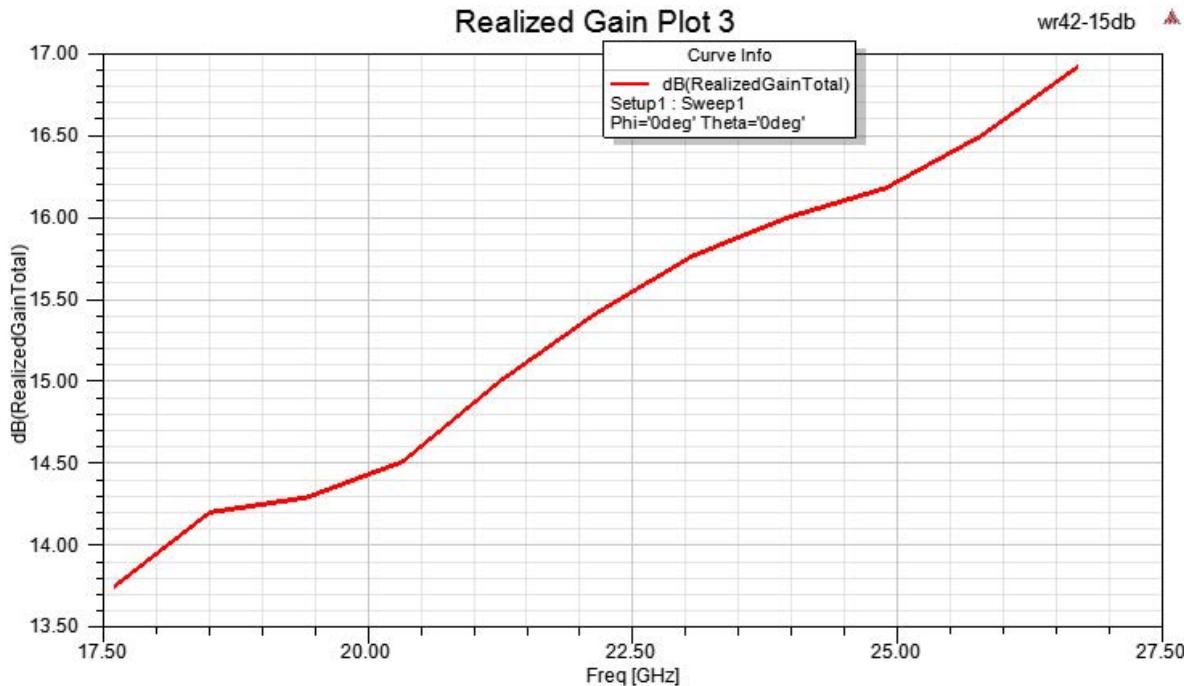

WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm Male connector, with Pre-Installed L Mount



PE2WAN042-15KM

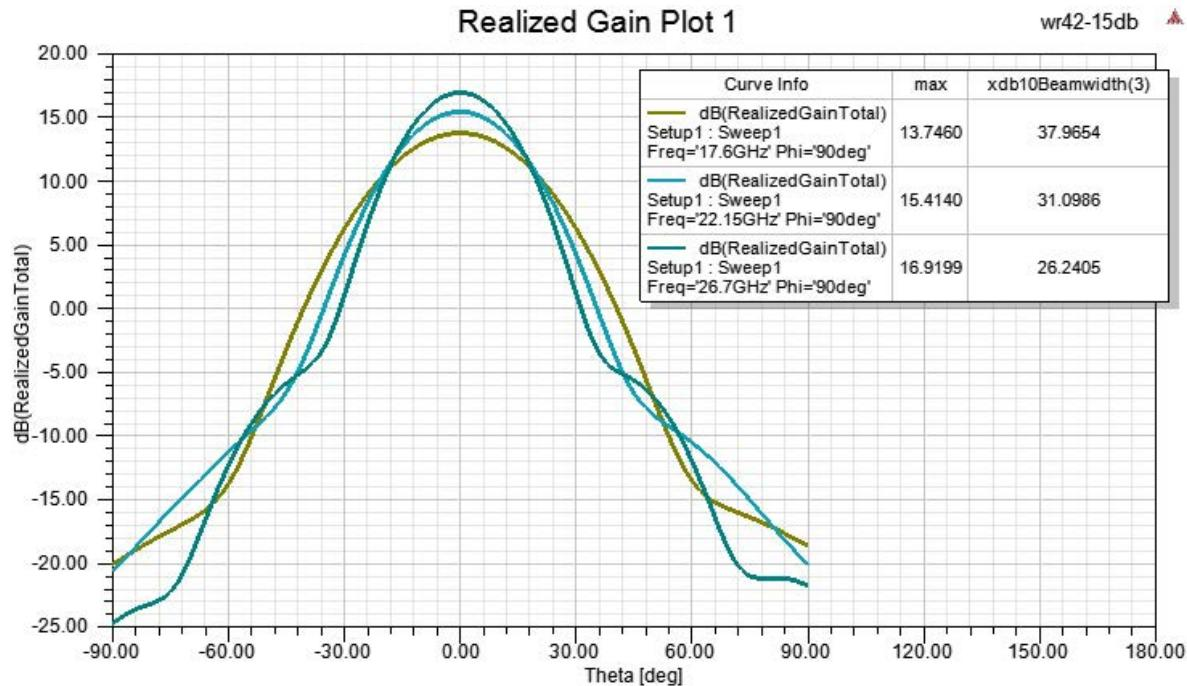

WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm Male connector, with Pre-Installed L Mount from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm Male connector, with Pre-Installed L Mount PE2WAN042-15KM](#)

URL: <https://www.pasternack.com/wr-42-waveguide-standard-gain-horn-antenna-15-dbi-2.92mm-pe2wan042-15km-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE2WAN042-15KM CAD Drawing

WR-42 Standard Gain Horn with 15 dBi gain, 2.92mm Male connector, with Pre-Installed L Mount

