



SMA Male Right Angle to SMA Male Right Angle Cable Using RG402 Coax

RF Cable Assemblies Technical Data Sheet

PE3819

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: RG402

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.5:1	
Capacitance		29.9 [98.1]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			1,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	12.4	GHz
Insertion Loss (Typ.)	0.26 [0.85]	0.32 [1.05]	0.375 [1.23]	0.467 [1.53]	0.71 [2.33]	dB/ft [dB/m]
VSWR (Max.)	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	

Mechanical Specifications

Cable Assembly

Diameter	0.315 in [8 mm]
Weight	0.062 lbs [28.12 g]

Cable

Cable Type	RG402
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Copper

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using RG402 Coax PE3819](#)



SMA Male Right Angle to SMA Male
Right Angle Cable Using RG402 Coax

RF Cable Assemblies Technical Data Sheet

PE3819

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50μ in. minimum	50μ in. minimum
Dielectric Type	Teflon	Teflon
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100μ in. minimum	100μ in. minimum
Hex Size	5/16 in	5/16 in
Torque	5 in-lbs [0.57 Nm]	5 in-lbs [0.57 Nm]
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	30μ in. minimum	30μ in. minimum

Compliance Certifications (visit www.Pasternack.com for current document)

For RoHS Compliant version, use PE3819LF. Contact Pasternack if product cannot be found.

REACH Compliant

12/19/2011

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using RG402 Coax PE3819](#)



SMA Male Right Angle to SMA Male
Right Angle Cable Using RG402 Coax

RF Cable Assemblies Technical Data Sheet

PE3819

How to Order

Part Number Configuration:

PE3819

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3819-12 = 12 inches long cable
PE3819-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Right Angle Cable Using RG402 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using RG402 Coax PE3819](#)

URL: <https://www.pasternack.com/sma-male-sma-male-rg402u-cable-assembly-pe3819-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3819 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Cable Using RG402 Coax

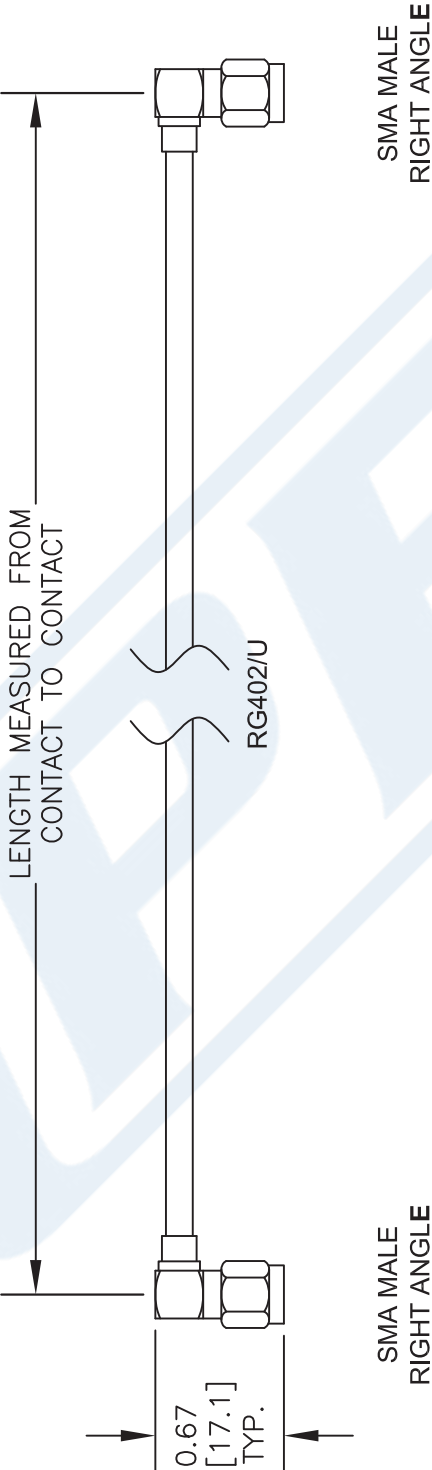

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE		FSCM NO. 53919	
PE3819		CAD FILE	062716
		SCALE	N/A
		SIZE	A
			2233

**PASTERNAK®**
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com