



N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39467-9

Hand Formable N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR402FLJ Coax, RoHS

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

Configuration

Connector 1	N Male
Connector 2	N Male Right Angle
Cable Type	PE-SR402FLJ

Electrical Specifications

Frequency Range, GHz	DC to 11
Impedance, Ohms	50
Maximum VSWR	1.35:1
Velocity of Propagation, %	69
RF Shielding, dB	100
Maximum Operating Voltage, Vrms	350

Typical Electrical Specifications

Frequency 1

Frequency, MHz	1000
Insertion Loss	0.119 dB/ft [0.39 dB/m]

Frequency 2

Frequency, GHz	5
Insertion Loss	0.28 dB/ft [0.92 dB/m]

Frequency 3

Frequency, GHz	10
Insertion Loss	0.421 dB/ft [1.38 dB/m]

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR-402FLJ Coax, RoHS PE39467-9](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


**N Male to N Male Right Angle Semi-Flexible Precision
Cable 9 Inch Length Using PE-SR402FLJ Coax, RoHS**
TECHNICAL DATA SHEET
PE39467-9
Mechanical Specifications
Cable Assembly

Cable Type	PE-SR402FLJ
------------	-------------

Temperature

Temperature Operating Range, deg C	-55 to +125
------------------------------------	-------------

Size

Length, in [mm]	9 [228.6]
Diameter, in [mm]	0.161 [4.09]

Cable Color

One Time Minimum Bend Radius, in [mm]	Black
Repeated Minimum Bend Radius, in [mm]	0.75 [19.05]

1.575 [40.01]

Cable

Center Conductor Type	Solid
Cable Inner Conductor	Copper, Silver
No of Shields	1
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter, in [mm]	0.161 [4.09]

Connector 1

Type	N Male
Configuration	Straight

Connector 2

Type	N Male Right Angle
Configuration	Right Angle

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR-402FLJ Coax, RoHS PE39467-9](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39467-9

Plotted and Other Data

Notes:

Values at 25 °C, sea level

N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR402FLJ Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Semi-Flexible Precision Cable 9 Inch Length Using PE-SR402FLJ Coax, RoHS PE39467-9](#)

URL: <http://www.pasternack.com/n-male-n-male-pe-sr402flj-cable-assembly-pe39467-9-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE39467-9 CAD Drawing

N Male to N Male Right Angle Semi-Flexible Precision Cable
9 Inch Length Using PE-SR402FLJ Coax, RoHS

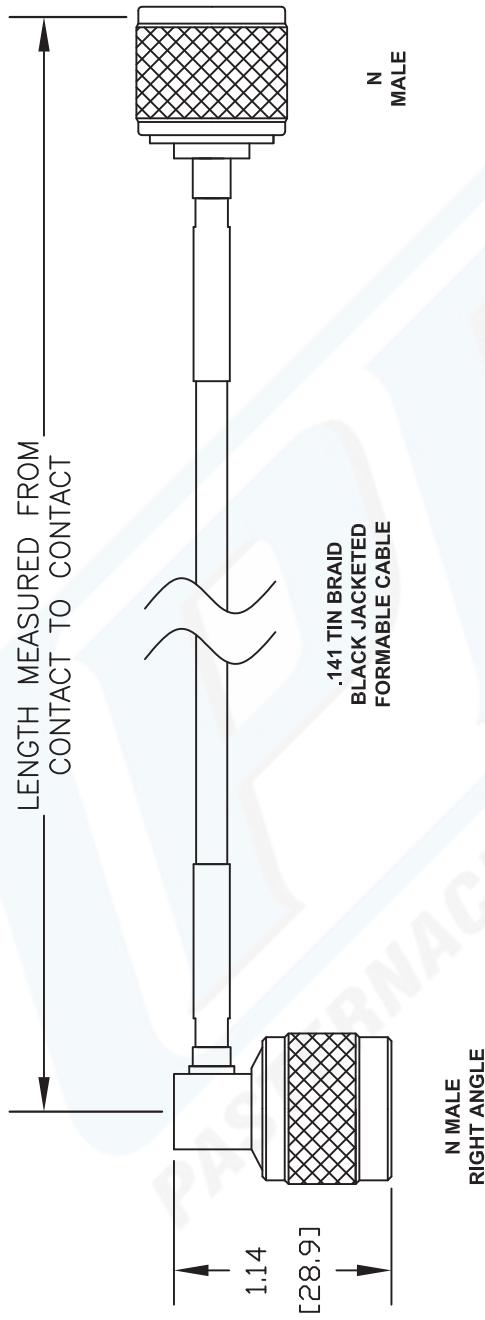

Note: This part is lead free.

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration	Examples	-12	12"	-25CM	25Cm
PE3 <u>zzz</u> <u>yy</u> - <u>xx</u> <u>uu</u>	PE3000LF-100	-24	24"	-50CM	50Cm
00 - 99999	PE3000-100	-36	36"	-75CM	75Cm
LF = Lead Free	PE3000LF-100CM	-48	48"	-100CM	100Cm
< Blank > = Standard	PE3000-100CM	-60	60"	-125CM	125Cm
Length		-xx	Custom Length	-xxCM	Custom Length

DWG TITLE

PE39467

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR 3/8", WHICHEVER IS GREATER.

PASTERNACK ENTERPRISES, INC.
P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

PASTERNACK ENTERPRISES®
ESTABLISHED 1977



COAXIAL & FIBER OPTICS

REV. -	FSCM NO.	53919	CAD FILE	041912	SCALE	N/A	SIZE A	2231