

## N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax



### RF Cable Assemblies Technical Data Sheet


**PE3C7842-50CM**

#### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: 1/4" Superflexible

#### Features

- Max Frequency 6 GHz
- Low PIM: -150 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

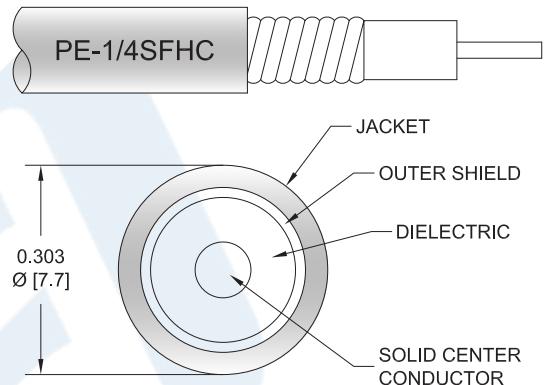

#### Applications

- General Purpose
- Laboratory Use
- Distributed Antenna Systems (DAS)
- Low PIM Applications and PIM Testing

#### Description

Pasternack's PE3C7842-50CM type N male to type N male 50 cm cable using 1/4 inch superflexible coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm corrugated 1/4" superflexible coax. The PE3C7842-50CM type N male to type N male cable assembly operates to 6 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7842-50CM](#)

## N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax



### RF Cable Assemblies Technical Data Sheet

**PE3C7842-50CM**

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units           |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range               | DC      |              | 6       | GHz             |
| VSWR                          |         |              | 1.5:1   |                 |
| Velocity of Propagation       |         | 82           |         | %               |
| RF Shielding                  | 120     |              |         | dB              |
| Passive Intermodulation       |         |              | -150    | dBc             |
| Capacitance                   |         | 24.4 [80.05] |         | pF/ft [pF/m]    |
| Inductance                    |         | 0.059 [0.19] |         | uH/ft [uH/m]    |
| DC Resistance Inner Conductor |         | 3.2 [10.5]   |         | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor |         | 2.53 [8.3]   |         | Ω/1000ft [Ω/Km] |
| Jacket Spark                  |         |              | 2,000   | Vrms            |

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.1  | 0.25 | 0.5  | 1    | 3    | GHz   |
| Insertion Loss (Typ.) | 0.22 | 0.24 | 0.26 | 0.29 | 0.37 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector loss.

#### Mechanical Specifications

##### Cable Assembly

|          |                      |
|----------|----------------------|
| Length*  | 19.68 in [499.87 mm] |
| Diameter | 0.85 in [21.59 mm]   |

##### Cable

|                                      |                                  |
|--------------------------------------|----------------------------------|
| Cable Type                           | 1/4" Superflexible               |
| Impedance                            | 50 Ohms                          |
| Inner Conductor Type                 | Solid                            |
| Inner Conductor Material and Plating | Copper Clad Aluminum             |
| Dielectric Type                      | PE (F)                           |
| Number of Shields                    | 1                                |
| Shield Layer 1                       | Helically Corrugated Copper Tube |
| Jacket Material                      | PE, Black                        |
| Jacket Diameter                      | 0.303 in [7.7 mm]                |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7842-50CM](#)

## N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax



### RF Cable Assemblies Technical Data Sheet

**PE3C7842-50CM**

|                              |                   |
|------------------------------|-------------------|
| One Time Minimum Bend Radius | 0.5 in [12.7 mm]  |
| Repeated Minimum Bend Radius | 1 in [25.4 mm]    |
| Typical Flex Cycles          | 20                |
| Tensile Strength             | 79 lbs [35.83 Kg] |

#### Connectors

| Description                       | Connector 1      | Connector 2      |
|-----------------------------------|------------------|------------------|
| Type                              | N Male           | N Male           |
| Specification                     | IEC 61169-16     | IEC 61169-16     |
| Impedance                         | 50 Ohms          | 50 Ohms          |
| Contact Material and Plating      | Brass, Silver    | Brass, Silver    |
| Dielectric Type                   | PTFE             | PTFE             |
| Body Material and Plating         | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7842-50CM](#)

N Male to N Male Cable 50 Cm Length  
Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet

PE3C7842-50CM

**How to Order**

Part Number Configuration:

**PE3C7842**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C7842-12 = 12 inches long cable  
PE3C7842-100cm = 100 cm long cable

N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7842-50CM](#)

URL: <https://www.pasternack.com/n-male-n-male-pe-1-4-sfhc-cable-assembly-pe3c7842-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C7842-50CM CAD Drawing

N Male to N Male Cable 50 Cm Length Using 1/4 inch Superflexible Coax

