



High Power 200 Watt RF Load Up to 3 GHz With N Female Input High Power Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6231

Features

- High Power RF Load
- DC to 3 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 200 Watt (CW)
- N Female Coaxial Interface

Applications

- Wireless
- Radar Systems
- Test and Measurement
- Commercial and Military Communication
- SatCom

Description

Pasternack's PE6231 is an RF termination (also called RF load or dummy load) that operates from DC to 3 GHz and handles up to 200 Watt (CW). Our N termination / load has a female gender. PE6231 N load termination offers 1.25:1 max VSWR. This Pasternack high power 200W N terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Passive Intermodulation			-100	dBc
Input Power (CW) derated linearly to 20W at +125°C			200	Watts
Input Power (Peak) 5µs pulse, 2% duty cycle			10	KWatts

Electrical Specification Notes:

Passive intermodulation measured with two 20W signals at 935 MHz and 960 MHz.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 200 Watt RF Load Up to 3 GHz With N Female Input High Power Black Anodized Aluminum Heatsink PE6231](#)



High Power 200 Watt RF Load Up to 3 GHz With N
Female Input High Power Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6231

Mechanical Specifications

Size

Length	9.57 in [243.08 mm]
Width	3.86 in [98.04 mm]
Height	2.36 in [59.94 mm]
Weight	5.95 lbs [2.7 Kg]

Configuration

Connector	N Female
-----------	----------

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Body	Brass	Nickel
Housing	Black Anodized Aluminum Heatsink	

Environmental Specifications

Temperature

Operating Range	-55 to +125 deg C
-----------------	-------------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 200 Watt RF Load Up to 3 GHz With N Female Input High Power Black Anodized Aluminum Heatsink PE6231](#)




High Power 200 Watt RF Load Up to 3 GHz With N Female Input High Power Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6231

Typical Performance Data

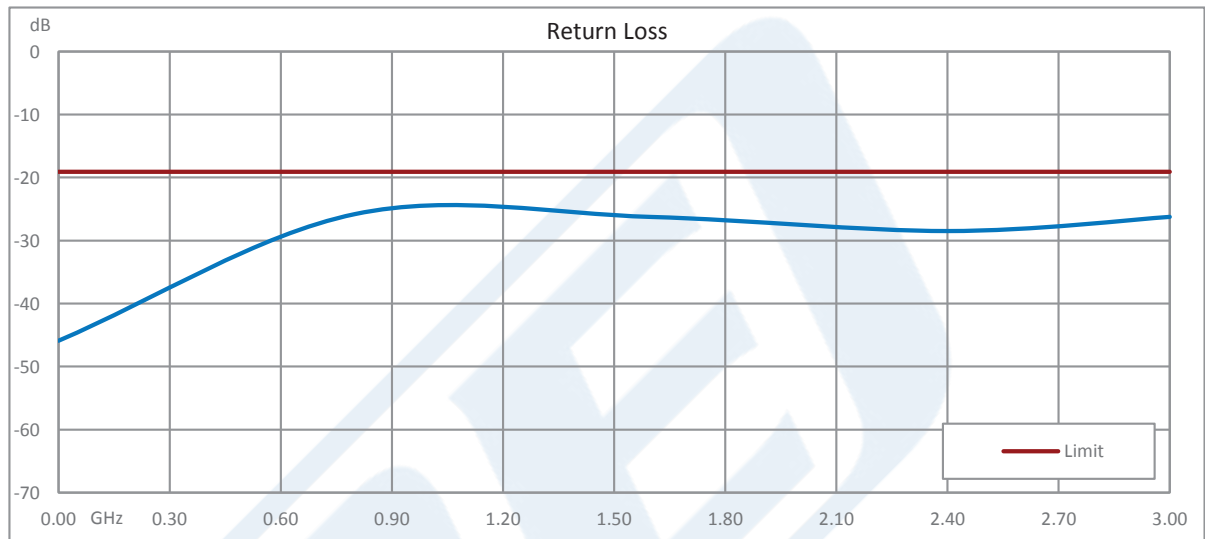

High Power 200 Watt RF Load Up to 3 GHz With N Female Input High Power Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 200 Watt RF Load Up to 3 GHz With N Female Input High Power Black Anodized Aluminum Heatsink PE6231](http://www.pasternack.com/200-watts-n-female-rf-load-up-to-3-ghz-pe6231-p.aspx)

URL: <http://www.pasternack.com/200-watts-n-female-rf-load-up-to-3-ghz-pe6231-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6231 CAD Drawing

High Power 200 Watt RF Load Up to 3 GHz With N Female Input
High Power Black Anodized Aluminum Heatsink

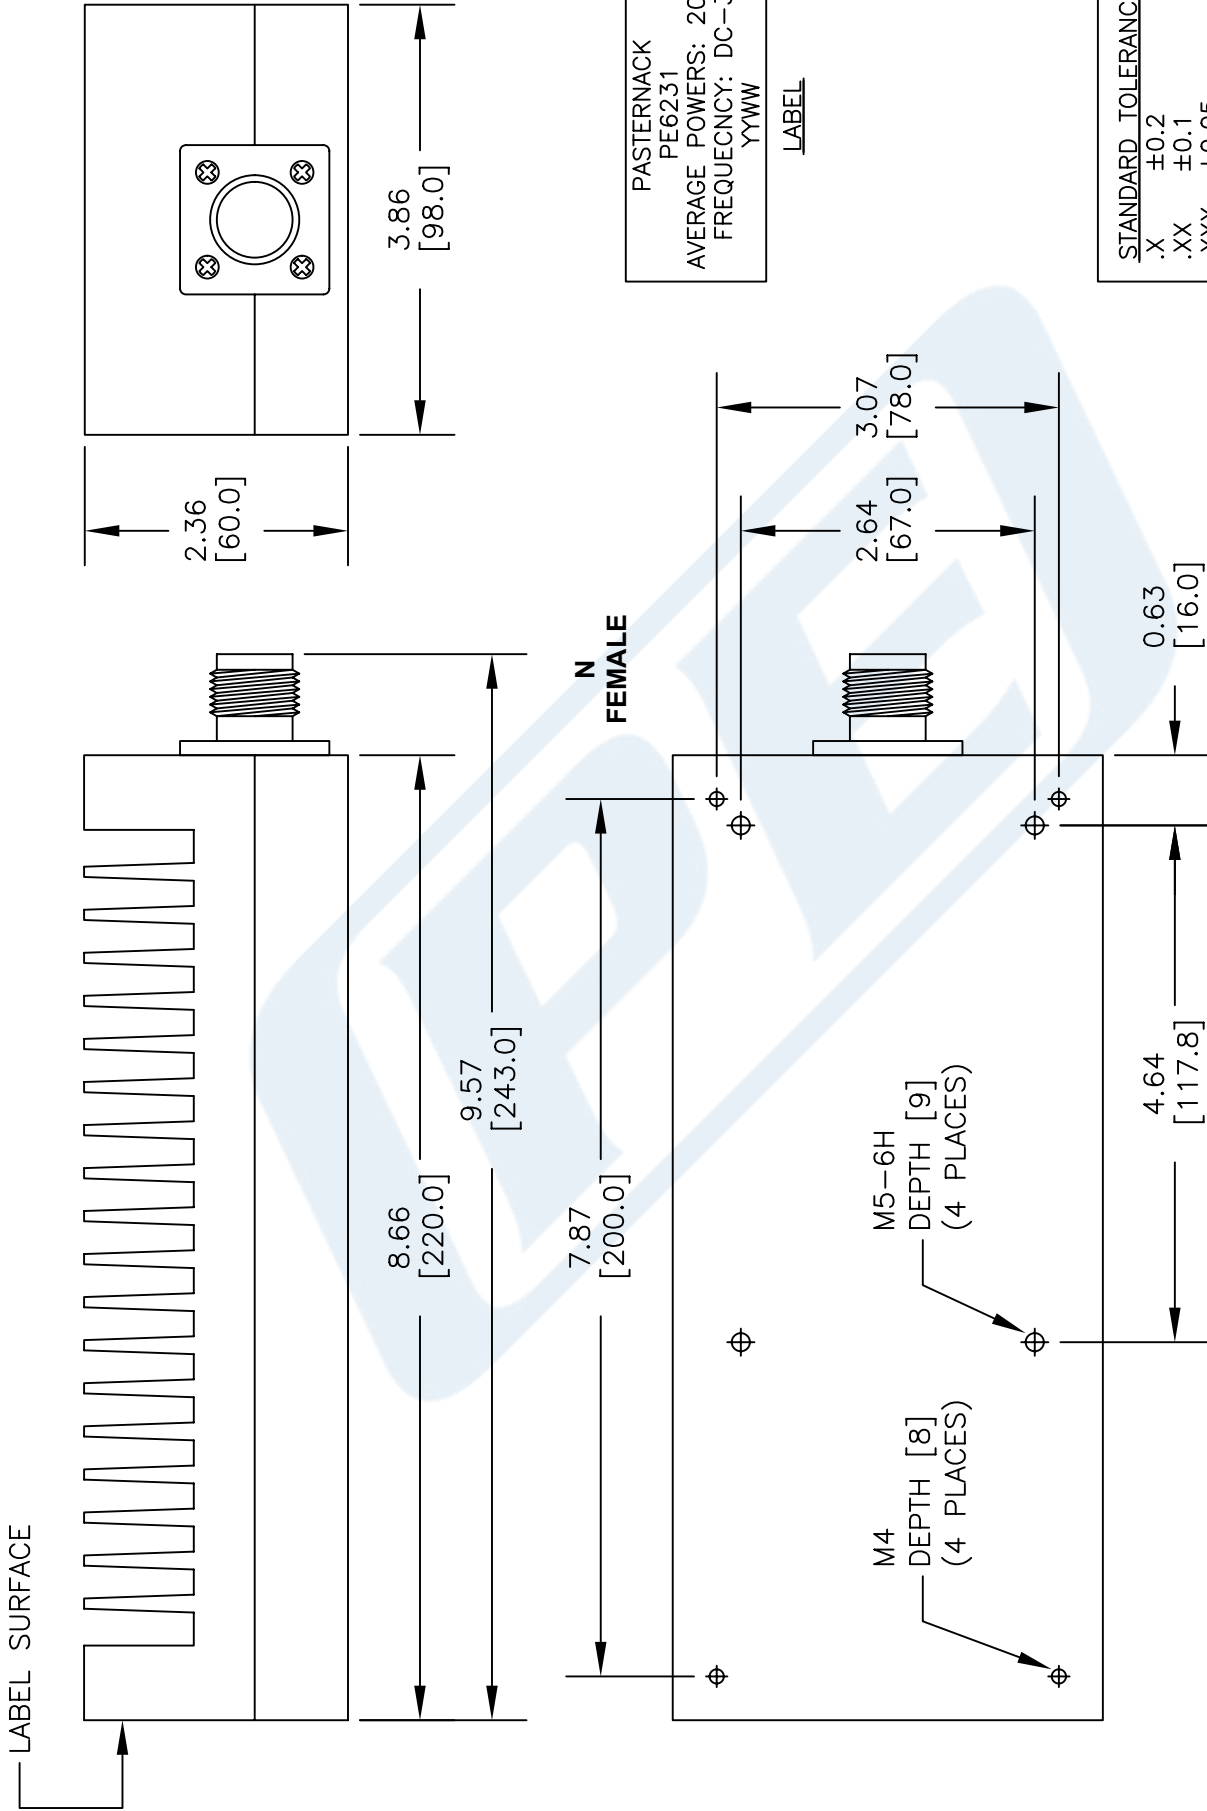

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE6231

FSCM NO. 53919

CAD FILE 052616

SCALE N/A

SIZE A

3045

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com