



SMA Male Connector Solder Attachment for PE-SR405AL, PE-SR405FL, PE-SR405FLJ, PE-SR405TN, RG405

RF Connectors Technical Data Sheet

PE44690

Configuration

- SMA Male Connector
- 50 Ohms
- Straight Body Geometry

- Connector Interface Types: PE-SR405AL, PE-SR-405FL, PE-SR405FLJ, PE-SR405TN, RG405
- 16-May inch Hex

Features

- Max. Operating Frequency 18 GHz
- Good VSWR of 1.35:1

- Gold over Nickel Plated Brass Contact

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE44690 SMA male connector with solder/solder attachment for PE-SR405AL, PE-SR405FL, PE-SR405FLJ, PE-SR405TN and RG405 is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 18 GHz and offers good VSWR of 1.35:1.

Our SMA male connector PE44690 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.35:1	

Mechanical Specifications

Size

Length
Width/Dia.

0.441 in [11.2 mm]
0.315 in [8.00 mm]

Weight

0.008 lbs [3.63 g]

Mating Torque

8 to 10 in-lbs [0.90 to 1.13 Nm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment for PE-SR405AL, PE-SR405FL, PE-SR405FLJ, PE-SR405TN, RG405 PE44690](#)



SMA Male Connector Solder Attachment for PE-SR405AL, PE-SR405FL, PE-SR405FLJ, PE-SR405TN, RG405

RF Connectors Technical Data Sheet

PE44690

Material Specifications

Description	Material	Plating
Contact	Brass	Gold over Nickel
Insulation	PTFE	
Body	Brass	Gold over Nickel
Coupling Nut	Passivated Stainless Steel	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



SMA Male Connector Solder Attachment for PE-SR405AL, PE-SR405FL, PE-SR405FLJ, PE-SR405TN, RG405 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment for PE-SR405AL, PE-SR405FL, PE-SR405FLJ, PE-SR405TN, RG405 PE44690](#)

URL: <https://www.pasternack.com/sma-male-pe-sr405al-pe-sr405fl-pe-sr405tn-rg405-connector-pe44690-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR PE44690	12/23/2019	S.ELLIS

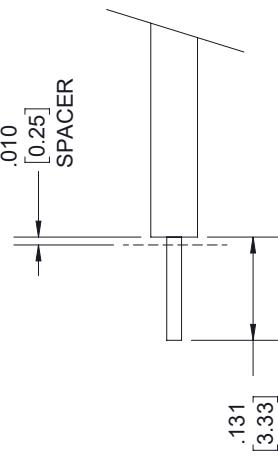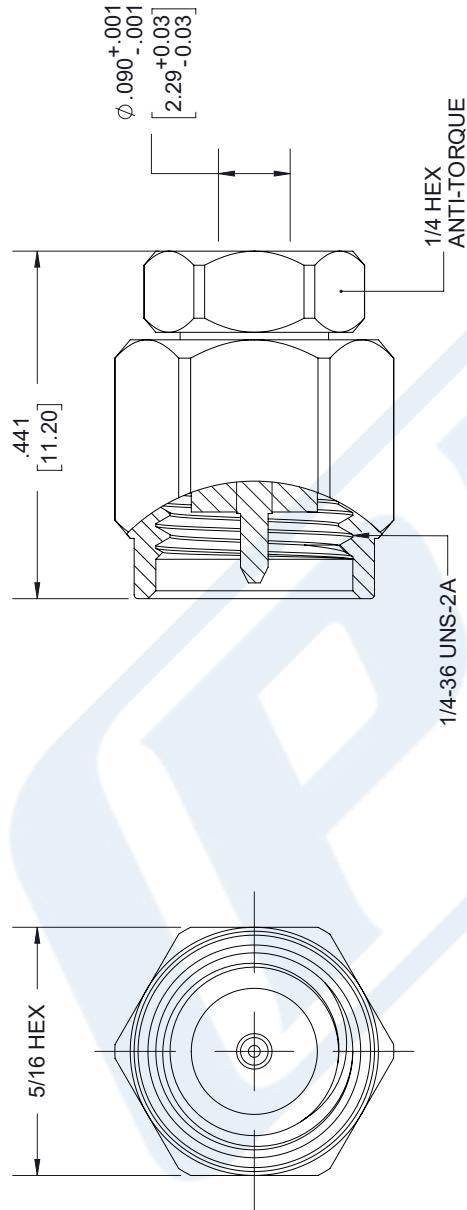

STRIPPING DIMENSIONS

NOTES:

1. CABLE ATTACHMENT:
 - OUTER: SOLDER.
 - INNER: SOLDER.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX		SPACER		1/4 HEX ANTI-TORQUE		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	

1/4-36 UNS-2A		1/4 HEX ANTI-TORQUE		1/4 HEX SPACER		1/4-36 UNS-2A	
.441 [11.20]		.090 +.001 -.001 [2.29 +0.03 -0.03]		.100 [0.25]		.131 [3.33]	
5/16 HEX							



SMA Male Right Angle Connector Solder Attachment for PE-SR405AL, PE-SR405FL, RG405

RF Connectors Technical Data Sheet

PE4025

Configuration

- SMA Male Connector
- MIL-STD-348A
- 50 Ohms
- Right Angle Body Geometry
- PE-SR405AL, PE-SR405FL, RG405 Interface Type
- Solder/Solder Attachment
- 5/16 inch Hex

Features

- Max. Operating Frequency 12.4 GHz
- Excellent VSWR of 1.23:1
- Gold Plated Brass Contact
- 50 µin minimum contact plating

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE4025 SMA male right angle connector with solder/solder attachment for PE-SR405AL, PE-SR405FL and RG405 is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 12.4 GHz and offers excellent VSWR of 1.23:1. Its right angle body geometry allows for easier connections in tight spaces.

Our SMA male right angle connector PE4025 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.23:1	
Operating Voltage (AC)			335	Vrms

Mechanical Specifications

Size	
Length	0.65 in [16.51 mm]
Width/Dia.	0.315 in [8.00 mm]
Height	0.441 in [11.2 mm]
Weight	0.015 lbs [6.8 g]
Mating Torque	3 to 5 in-lbs [0.34 to 0.57 Nm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Solder Attachment for PE-SR405AL, PE-SR405FL, RG405 PE4025](#)



SMA Male Right Angle Connector Solder Attachment for PE-SR405AL, PE-SR405FL, RG405

RF Connectors Technical Data Sheet

PE4025

Material Specifications

Description	Material	Plating
Contact	Brass	Gold 50 μ in minimum
Insulation	PTFE	
Body	Stainless Steel	Gold 30 μ in minimum
Coupling Nut	Brass	Nickel 100 μ in minimum

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Assembly Instruction

SMA Male Right Angle Connector Solder Attachment for PE-SR405AL, PE-SR405FL, RG405 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Solder Attachment for PE-SR405AL, PE-SR405FL, RG405 PE4025](#)

URL: <https://www.pasternack.com/sma-male-standard-pe-sr405al-pe-sr405fl-rg405-connector-pe4025-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE4025 CAD Drawing

SMA Male Right Angle Connector Solder Attachment
for PE-SR405AL, PE-SR405FL, RG405

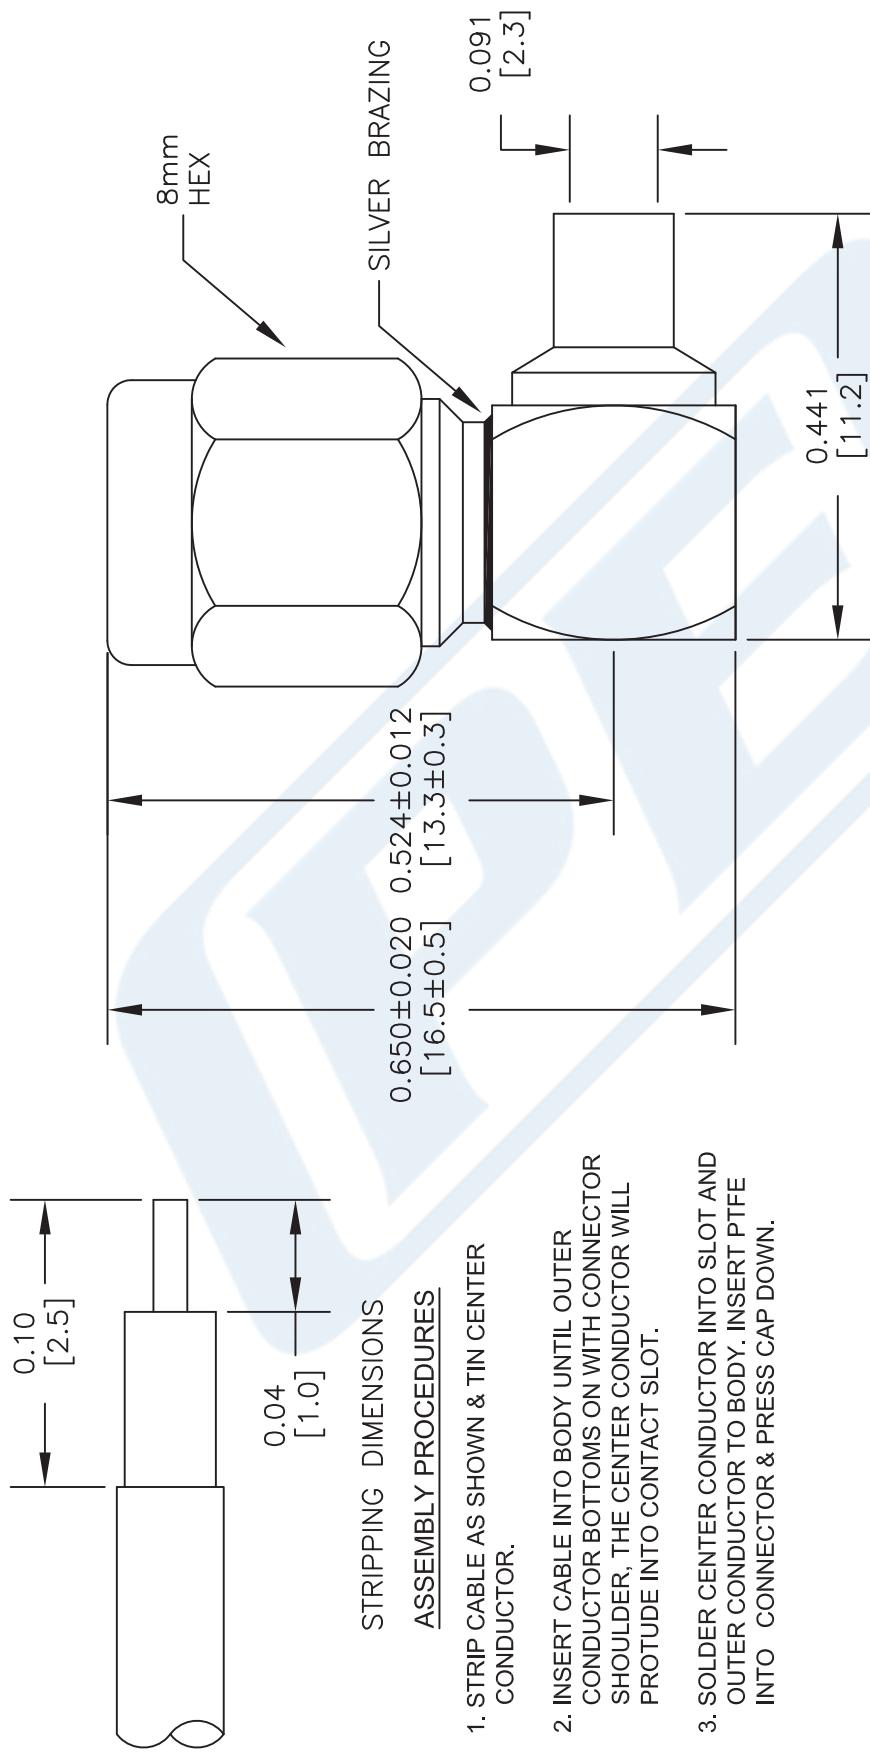

STANDARD TOLERANCES

.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE	PE4025
FSCM NO.	53919

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

SIZE A	2233
--------	------

RG405 Tinned Coax Cable with Tinned Copper Outer Conductor

RF Cables Technical Data Sheet

PE-SR405TN

Configuration

- Semi-Rigid Cable
- MIL-C-17
- 1 Shield(s)

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	1	10	20			GHz
Attenuation, Typ	22	80	120			dB/100ft
	72.18	262.47	393.7			dB/100m
Input Power (CW), Max	130	35	20			Watts

Mechanical Specifications

Min. Bend Radius (Installation) 0.05 in [1.27 mm]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper Clad Steel, Silver, 1 Strand	0.02 in 0.51 mm
Conductor Type	Solid	
Dielectric	PTFE	0.066 in [1.68 mm]
First Shield	Tinned Copper	0.087 in 2.21 mm

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RG405 Tinned Coax Cable with Tinned Copper Outer Conductor PE-SR405TN](#)

RG405 Tinned Coax Cable with Tinned Copper Outer Conductor

RF Cables Technical Data Sheet

PE-SR405TN

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

RG405 Tinned Coax Cable with Tinned Copper Outer Conductor from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RG405 Tinned Coax Cable with Tinned Copper Outer Conductor PE-SR405TN](#)

URL: <https://www.pasternack.com/50-ohm-semi-rigid-rg405-tinned-tinned-copper-pe-sr405tn-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-SR405TN CAD Drawing

RG405 Tinned Coax Cable with Tinned Copper Outer Conductor

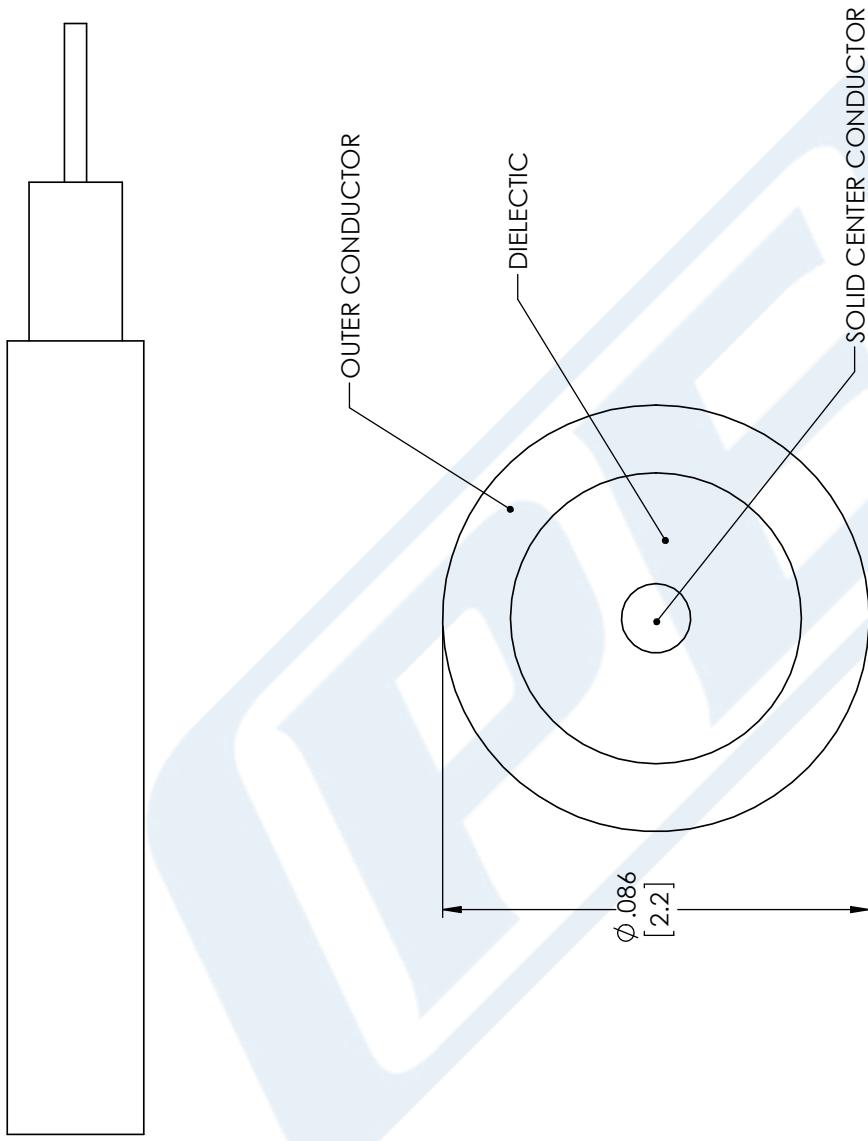

STANDARD TOLERANCES		
X	±0.2	
.XX	±0.01	
.XXX	±0.005	

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

PE PASTERNACK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

1/1/2017

SCALE N/A

SIZE A

CN2245

DWG TITLE
PE-SR405TN

CAGE CODE 53919

CAD FILE 1/1/2017